



SITE VICINITY MAP

L-2.0

SHEET INDEX

Sheet Number	Sheet Title
C-1.0	COVER PAGE
C-2.0	EXISTING CONDITIONS
C-2.1	TREE INVENTORY
C-3.0	DEMOLITION PLAN
C-4.0	SITE PLAN
C-5.0	GRADING AND EROSION CONTROL PLAN
C-5.1	EROSION CONTROL, SWPPP, AND BLUFF PROTECTION NOTES
C-6.0	UTILITY PLAN
C-7.0	DETAILS
C-7.1	DETAILS
C-7.2	DETAILS
C-7.3	DETAILS
L-1.0	LANDSCAPE PLAN

LANDSCAPE DETAILS



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

DEVELOPER

KAEDING MANAGEMENT RON CLARK CONSTRUCTION

ARCHITECT

MOMENTUM DESIGN GROUP PRIOR WORKS BUILDING 755 PRIOR AVENUE NORTH SUITE #301A ST. PAUL, MINNESOTA 55104 OFFICE: 952.583.9788 WWW.MDGARCHITECTS.COM

SURVEYOR

HARRY JOHNSON HARRY S. JOHNSON CO., INC. LAND SURVEYORS 9063 LYNDALE AVENUE SOUTH BLOOMINGTON, MN 55437 PH: 952-88-4-5341 www.hsjsurveyors.com

CONSULTANT

ALLIANT ENGINEERING, INC. 733 MARQUETTE AVE STE, 700 MINNEAPOLIS, MN 55415 PH: 612-758-3080 / FX: 612-758-3099 www.alliant-inc.com

CIVIL ENGINEER

DAVE NASH LICENSE NO. 40922 EM: dnash@alliant-inc.com

LANDSCAPE ARCHITECT

MARK KRONBECK, PLA, ASLA LICENSE NO. 26222 EM: mkronbeck@alliant-inc.com

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE

QUALITY ASSURANCE/CONTROL

DATE ISSUE

01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL


06-17-20 ADDENDUM #1 07-23-20 REVIEW SET 07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA DESIGNED:

PROJECT NO:

C-1.0

KDB/DMS

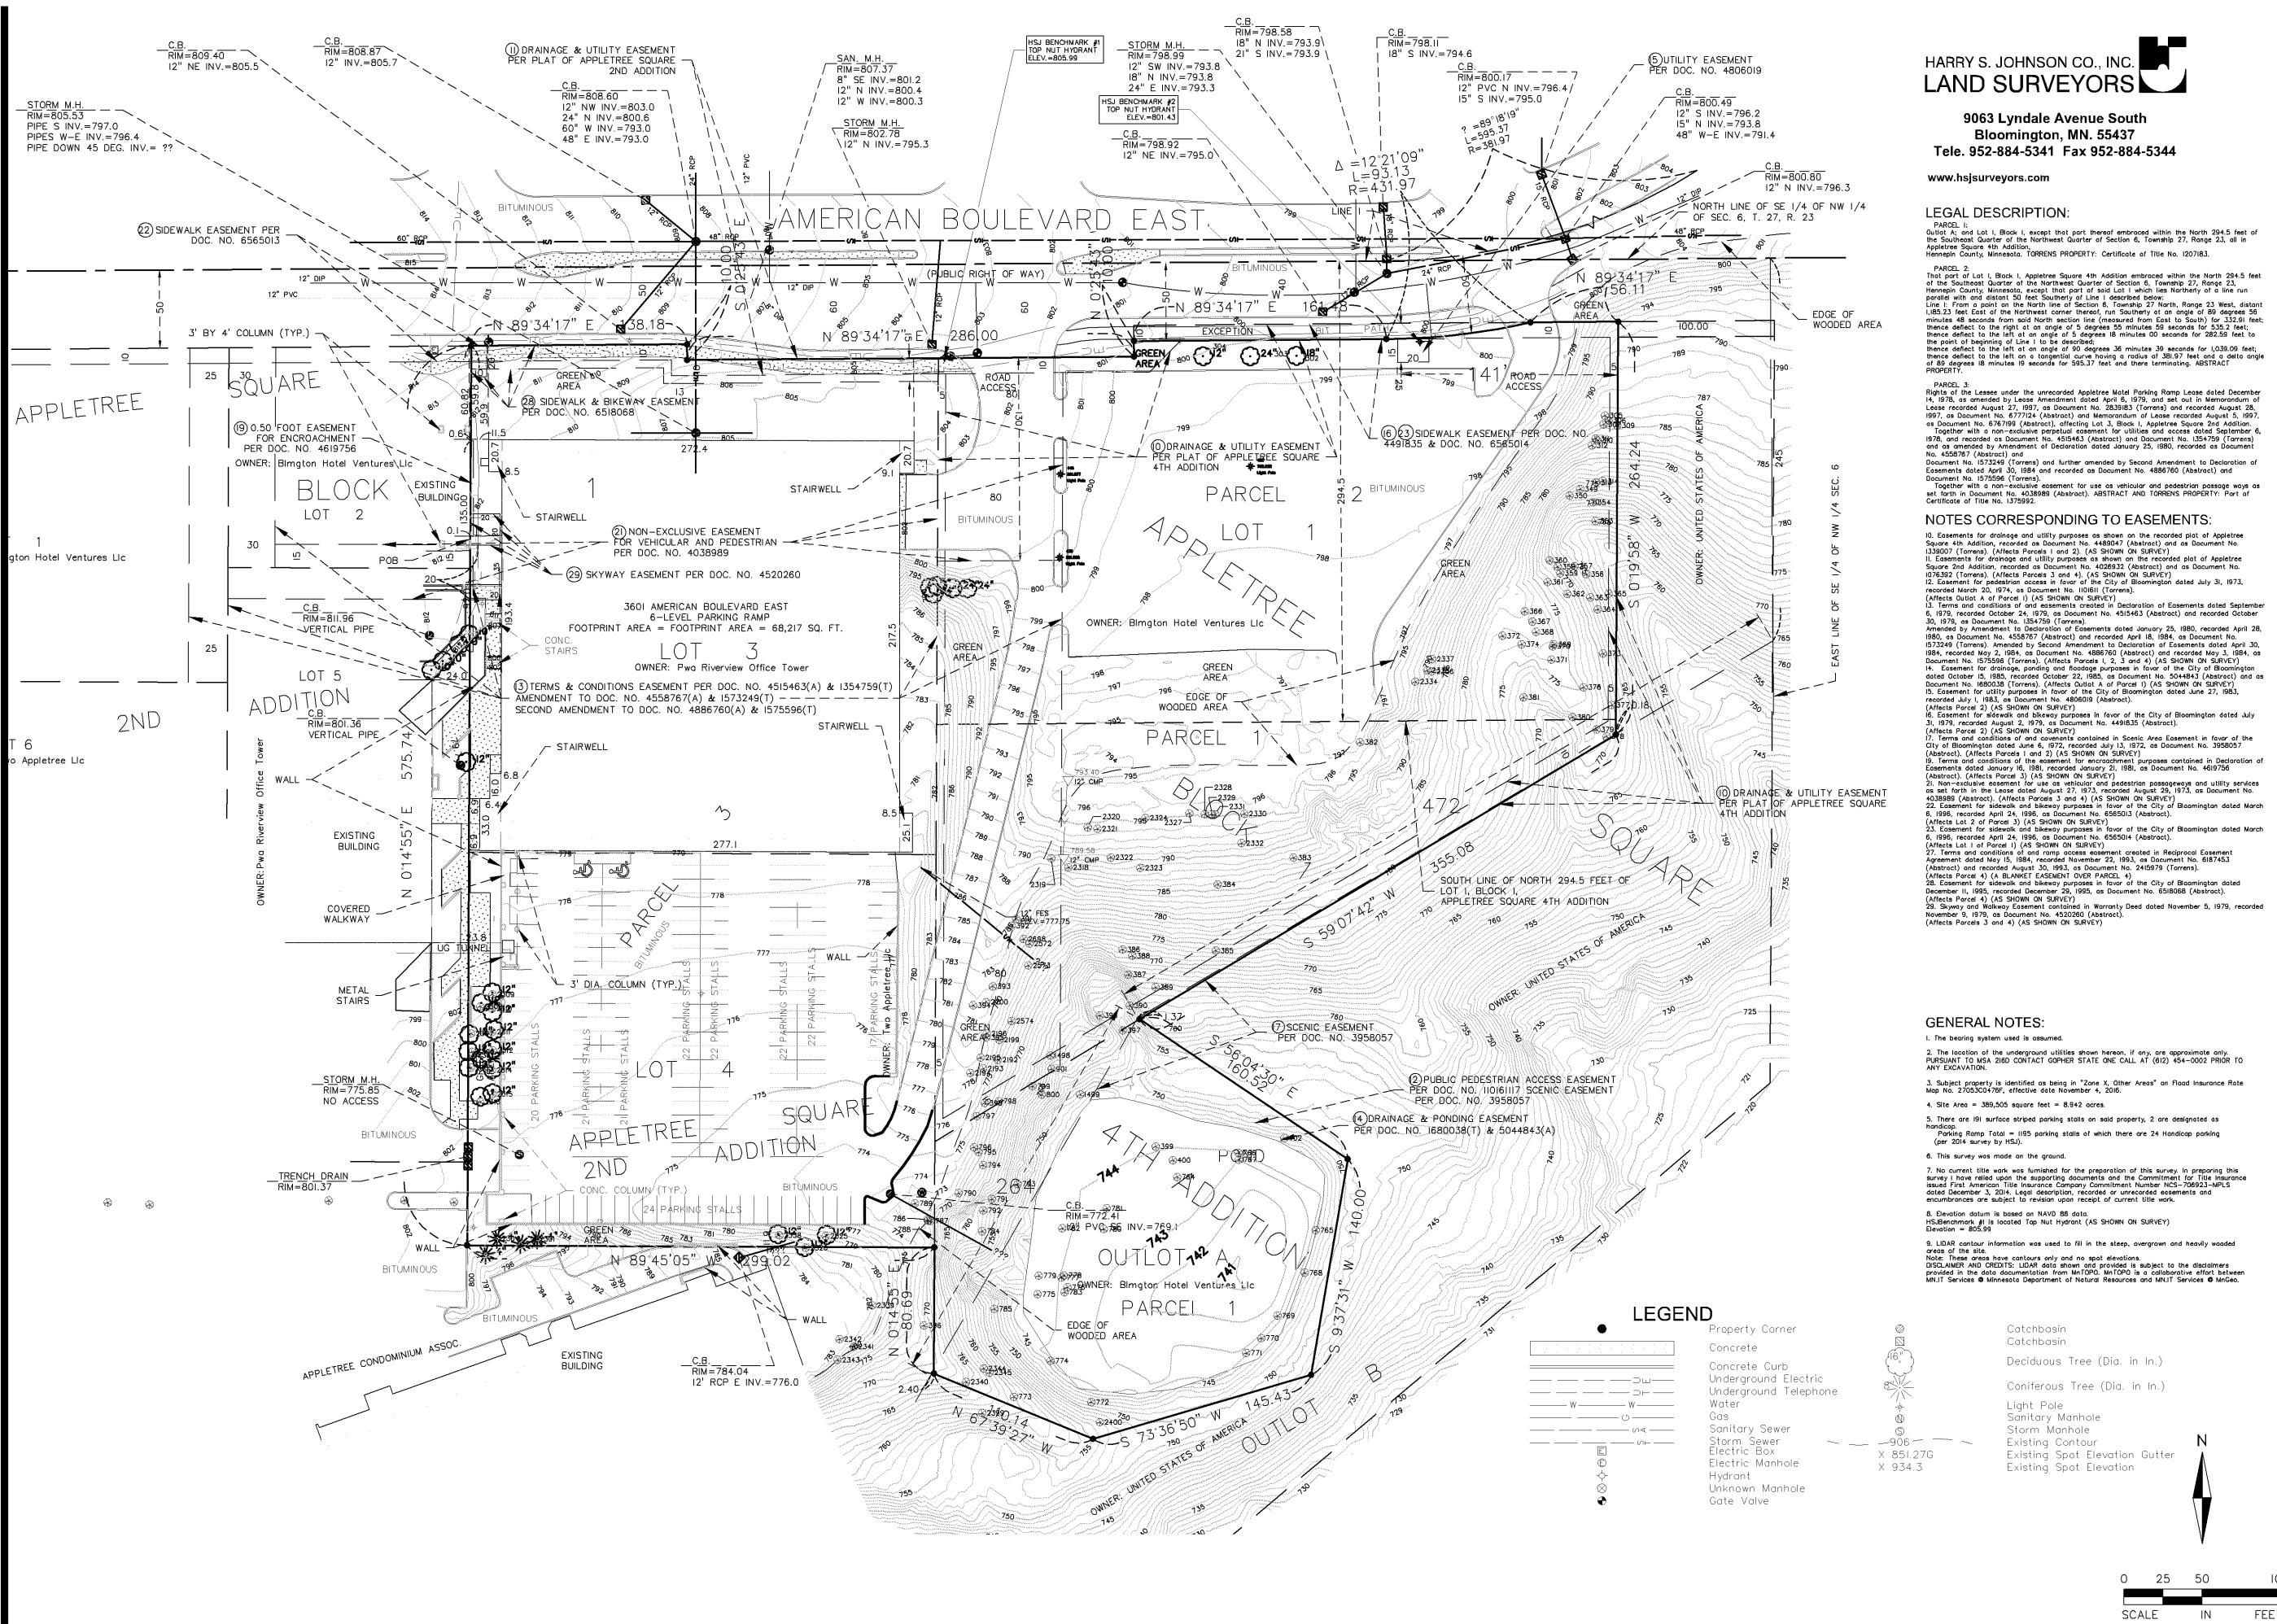



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080

www.alliant-inc.com

SOUTH Σ **APARTI** QUAR

MIALITY ASSLIDANCE /CONTRO

VALITI	ASSUR	ANCE/ CONTROL
Υ		DATE
ATE	ISSUE	
ROJECT	TEAM	DATA
ESIGNED:		

C-2.0

DRAWN:

PROJECT NO:

TREE INVENTORY

			_		
Tag Number	DBH	Common Name	Remove	Located in the Bluff	Notes
302 303		Basswood Basswood	X		2x trunk 15, 11
304		Basswood	X		
305		Hackberry		Yes	
306		Hackberry		Yes	
307 308		Hackberry Hackberry		Yes Yes	
309		Hackberry		Yes	
310		Hackberry		Yes	
311		Hackberry		Yes	
312		Hackberry		Yes	
313 314		Hackberry Hackberry		Yes Yes	
349		Hackberry		Yes	
350		Hackberry		Yes	
353		Hackberry		Yes	
354 356		Locust Locust		Yes Yes	
357		Locust		Yes	
358		Hackberry		Yes	
359		Locust		Yes	
360 361		Hackberry Locust		Yes Yes	
362		Hackberry		Yes	
363	6	Hackberry		Yes	
364		Hackberry		Yes	
365 366	6 4	Hackberry Oak		Yes Yes	
367		Locust		Yes	
368	41	Oak		Yes	2x trunk 18, 23
369		Elm		Yes	
370 371		Elm Elm		Yes Yes	
372		Oak		Yes	
373		Elm		Yes	
374		Elm		Yes	
375 376		Oak Elm		Yes Yes	
376		Hackberry		Yes	
378		Hackberry		Yes	
379		Oak		Yes	
380		Elm		Yes	2
381 382		Elm Russian Olive		Yes Yes	2x trunk 18, 12
383		Russian Olive		Yes	2x trunk 10, 10
384		Hackberry		Yes	
385		Hackberry		Yes	2
386 387		Hackberry Hackberry		Yes Yes	2x trunk 15, 5
388		Elm		Yes	
389		Elm		Yes	
390 391		Elm Russian Olive		Yes Yes	3v *** ml 7 10 9
392		Hackberry		Yes	3x trunk 7, 10, 8
393		Locust	Х	Yes	
394		Locust	Х		
395		Hackberry		Yes	
396 397		Hackberry Elm		Yes Yes	
398		Elm		Yes	
399		Hackberry		Yes	
400		Hackberry Hackberry		Yes Yes	
764		Elm		Yes	
765	8	Elm		Yes	
766		Elm		Yes	
767 768		Elm Elm		Yes Yes	2x trunk 5, 4
769		Elm		Yes	
770	6	Elm		Yes	
771		Elm		Yes	
772 773		Elm Elm		Yes Yes	
773		Elm		Yes	
775	19	Elm		Yes	
776		Hackberry		Yes	
777		Elm Elm		Yes Yes	
779		Elm		Yes	
780	17	Elm		Yes	
781		Elm		Yes	
782 783		Elm Elm		Yes	
784		Hackberry Hackberry	X	Yes Yes	
785		Elm		Yes	
786	6	Elm	Х	Yes	
787		Elm	X	Yes	
788 789		Elm Elm	X	Yes	
790		Elm	X	Yes	

Tag Number	DBH	Common Name	Remove	Located in the Bluff	Notes
791		Elm		Yes	
792		Elm	X	Yes	
793		Hackberry		Yes	
794		Elm		Yes	
795		Elm		Yes	
796		Elm		Yes	
797		Cottonwood		Yes	
798		Elm		Yes	
799		Elm		Yes	
901		Elm		Yes	
1396		Box Elder		Yes	
1498		Elm		Yes	
1499		Elm		Yes	
2193		Cottonwood		Yes	
2194 2195		Elm Elm	X	Yes Yes	
2195		Cottonwood		Yes	
2196		Cottonwood		Yes	
		Elm	X		
2200 2301		Colorado Green Spruce	^	Yes	11' tall
2301		Colorado Green Spruce			11' tall
2303		Colorado Green Spruce			11' tall
2304		Crab Apple			11 (01)
2305		Crab Apple			
2307		Crab Apple			
2308		Crab Apple			
2309		Crab Apple			
2310		Crab Apple			
2311		Crab Apple			
2312		Crab Apple			
2313		Crab Apple			
2314		Crab Apple			
2315		Crab Apple			
2316		Crab Apple			
2318		Elm		Yes	
2319	26	Box Elder			2x trunk 16, 10
2320	38	Cottonwood	X		
2321	16	Cottonwood	X		
2322	45	Cottonwood			3x trunk 18, 15, 12
2323	64	Cottonwood		Yes	4x trunk 16, 16, 16, 16
2324	19	Cottonwood	X		
2325	12	Ash			
2326	14	Ash			
2327		Cottonwood	Х		
2328		Cottonwood	X		
2329		Cottonwood	X		
2330		Cottonwood	X		
2331		Cottonwood	X		
2332	17	Cottonwood		Yes	
					1
2334	38	Cottonwood		Yes	
2334 2335	38 19	Cottonwood		Yes	
2334 2335 2336	38 19 23	Cottonwood Cottonwood		Yes Yes	
2334 2335 2336 2337	38 19 23 18	Cottonwood Cottonwood Cottonwood		Yes Yes Yes	
2334 2335 2336 2337 2338	38 19 23 18 17	Cottonwood Cottonwood Cottonwood Ash		Yes Yes Yes Yes	
2334 2335 2336 2337 2338 2339	38 19 23 18 17 18	Cottonwood Cottonwood Cottonwood Ash Maple		Yes Yes Yes Yes Yes Yes	
2334 2335 2336 2337 2338 2339 2340	38 19 23 18 17 18 96	Cottonwood Cottonwood Ash Maple Cottonwood		Yes Yes Yes Yes Yes Yes Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341	38 19 23 18 17 18 96	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry		Yes Yes Yes Yes Yes Yes Yes Yes Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342	38 19 23 18 17 18 96 14	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343	38 19 23 18 17 18 96 14 19	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344	38 19 23 18 17 18 96 14 19 16 23	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345	38 19 23 18 17 18 96 14 19 16 23 23	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood Cottonwood Cottonwood		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2399	38 19 23 18 17 18 96 14 19 16 23 23 16	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood Cottonwood Cottonwood		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2399 2400	38 19 23 18 17 18 96 14 19 16 23 23 16 40	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood Cottonwood Cottonwood Cottonwood Cottonwood		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2399 2400 2572	38 19 23 18 17 18 96 14 19 16 23 23 16 40 4	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood Cottonwood Cottonwood Cottonwood Cottonwood Elm		Yes	3x trunk 39, 29, 28
2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2399 2400	38 19 23 18 17 18 96 14 19 16 23 23 16 40 4	Cottonwood Cottonwood Ash Maple Cottonwood Hackberry Maple Hackberry Cottonwood Cottonwood Cottonwood Cottonwood Cottonwood		Yes	3x trunk 39, 29, 28



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

N SQUARE APARTMENTS, MN
ULEVARD E. AND 34TH AVE SOUTH
AN BOULEVARD EAST
P / PERMIT SET

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

TREE INVENTORY

04-21-21 Date

License No.

QUALITY ASSURANCE/CONTROL

DATE ISSUE

01-29-20 CITY SUBMITTAL

03-27-20 PROGRESS PLOT

05-06-20 REVISED CITY SUB

05-06-20 REVISED CITY SUBMITTAL

06-17-20 ADDENDUM #1

07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS

01-29-21 100% GMP PERMIT SET

04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA
DESIGNED:
DRAWN:

PROJECT NO:

C-2.1

KDB/DMS

190123



- ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THESE PLANS AND SPECIFICATIONS AND THE REQUIREMENTS AND STANDARDS OF THE LOCAL GOVERNING AUTHORITY. THE GEOTECHNICAL AND EVALUATION REPORTS AND RECOMMENDATIONS SET FORTH THEREIN ARE A PART OF THE REQUIRED CONSTRUCTION DOCUMENTS AND IN CASE OF CONFLICT SHALL TAKE PRECEDENCE UNLESS SPECIFICALLY NOTED OTHERWISE ON THE PLANS. THE CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER OF ANY DISCREPANCY BETWEEN GEOTECHNICAL AND EVALUATION REPORTS & PLANS, ETC.
- VERIFY THE LOCATION OF ALL EXISTING UTILITIES, CONTACT GOPHER STATE ONE CALL (1-800-252-1166) FOR UTILITY LOCATION PRIOR TO DEMOLITION AND CONSTRUCTION.
- PRIOR TO STARTING CONSTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE TO MAKE SURE THAT ALL REQUIRED PERMITS AND APPROVALS HAVE BEEN OBTAINED. NO CONSTRUCTION OR FABRICATION SHALL BEGIN UNTIL THE CONTRACTOR HAS RECEIVED AND THOROUGHLY REVIEWED ALL PLANS AND OTHER DOCUMENTS APPROVED BY ALL OF THE PERMITTING AUTHORITIES. DEMOLITION CONTRACTOR SHALL ALSO FILE FOR ALL NECESSARY PERMITS FOR DEMOLITION WITH THE CITY OF BLOOMINGTON.
- 5. DEMOLITION CONTRACTOR SHALL PROVIDE AIR QUALITY CONTROL MEASURES AT THE REQUEST OF COUNTY/CITY HEALTH INSPECTOR/INSPECTIONS OFFICER. DEMOLITION
- NEEDED TO PROTECT PEDESTRIANS AND VEHICULAR TRAFFIC FROM HAZARDS RESULTING FROM DIRECTLY OR INDIRECTLY FROM CONSTRUCTION.
- APPROVED BY THE STATE.
- 8. CONTRACTOR IS RESPONSIBLE FOR DEMOLITION & REMOVAL OF ALL EXISTING STRUCTURES WHICH INTERFERE WITH NEW WORK AS SHOWN IN PROPOSED
- 9. CONTRACTOR SHALL PROTECT ADJOINING PROPERTIES & STRUCTURES FROM HAZARDS ASSOCIATED WITH HIS CONSTRUCTION ACTIVITIES & SHALL BE RESPONSIBLE FOR ALL DAMAGES TO PROPERTIES & STRUCTURES THAT OCCUR AS A RESULT OF THESE
- 10. CONTRACTOR SHALL NOT IMPEDE EXISTING TRAFFIC CIRCULATION TO ADJACENT BUSINESSES.
- EDITION OF THE MINNESOTA TEMPORARY TRAFFIC CONTROL ZONE LAYOUTS FIELD
- REPORTS INCLUDING THE PHASE I REPORT AND FOLLOW REPORT RECOMMENDATIONS.

REMOVE TREE REMOVE EXISTING UTILITY **-**CLEARING LIMITS



- NOTIFY GOPHER ONE 48 HOURS PRIOR TO ANY SITE DEMOLITION. CONTRACTOR SHALL
- 4. CONTRACTOR TO COORDINATE THE REMOVAL OF THE EXISTING UTILITIES WITH THE RESPECTIVE UTILITY COMPANIES.
- CONTRACTOR SHALL TAKE ALL NECESSARY MEASURES TO KEEP DUST LEVELS TO A
- 6. CONTRACTOR SHALL FURNISH ALL NECESSARY FENCING BARRICADES AND SIGNING
- 7. ALL ITEMS CALLED FOR REMOVAL SHALL BE DISPOSED OF OFF-SITE IN A LOCATION
- CONSTRUCTION DRAWINGS.
- 11. PROVIDE TEMPORARY TRAFFIC CONTROL IN COMPLIANCE WITH THE MOST CURRENT
- 12. DEMOLITION CONTRACTOR SHALL FAMILIARIZE THEMSELVES WITH THE ENVIRONMENTAL

LEGEND

PROPERTY LINE EASEMENTS

REMOVE CURB AND GUTTER

REMOVE BITUMINOUS PAVEMENT/PATH

DEMOLITION

SOUTH

ALLIANT

ENGINEERING

733 Marquette Avenue

Suite 700

Minneapolis, MN 55402

612.758.3080

www.alliant-inc.com

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE

04-21-21 Date

QUALITY ASSURANCE/CONTROL

DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL 06-17-20 ADDENDUM #1 07-23-20 REVIEW SET 07-30-20 CONSTRUCTION DOCUMENTS


01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA DESIGNED: DRAWN: KDB/DMS

PROJECT NO:

C-3.0

190123

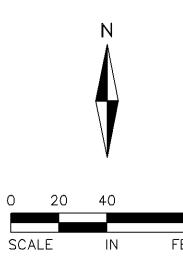

NOTES

- DIMENSIONS ARE TO TOP FACE OF CURB, EDGE OF SIDEWALK OR EXTERIOR OF BUILDING UNLESS OTHERWISE NOTED. REFER TO ARCHITECTURAL DRAWINGS FOR BUILDING DIMENSIONS AND SPECIFICATION FOR LOCATION OF EXITS, RAMPS, CONCRETE APRONS AND STOOPS.
- ALL CONCRETE CURB AND GUTTER ADJACENT TO CONCRETE WALK TO BE SEPARATED BY A 1/2 INCH EXPANSION JOINT.

STANDARDS AND SPECIFICATIONS, LATEST EDITION.

- 3. ALL STRIPING SHALL BE 4 INCH WHITE PAVEMENT STRIPING, PER GOVERNING
- AGENCY STANDARDS.


 4. ALL WORK SHALL COMPLY WITH THE CITY OF BLOOMINGTON ENGINEERING DESIGN
- 5. ALL CURB AND GUTTER TO BE CONCRETE B612 CURB UNLESS NOTED OTHERWISE, PER CITY STANDARDS.
- 6. CONTINUOUS CONCRETE CURB & GUTTER WHICH CHANGES TYPE SHALL HAVE A FIVE FOOT TRANSITION.
- 7. BITUMINOUS PAVEMENT SECTION DESIGN TO BE IN ACCORDANCE WITH LOCAL CONSTRUCTION STANDARDS. REFER TO GEOTECHNICAL REPORT AND DETAIL SHEET.
- 8. CONTRACTOR SHALL FIELD VERIFY THE LOCATIONS AND ELEVATIONS OF EXISTING UTILITIES AND TOPOGRAPHIC FEATURES, SUCH AS EXISTING GUTTER GRADES AT THE PROPOSED DRIVEWAYS, PRIOR TO THE START OF SITE GRADING. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER OF ANY DISCREPANCIES OF VARIATIONS FROM THE PLANS.
- 9. ACCESSIBLE ROUTE SHALL BE PROVIDED FROM ACCESSIBLE STALLS TO BUILDING ENTRANCE. (SEE MN ACCESSIBILITY CODE). POLE MOUNT APPROVED SIGNS, ONE VAN ACCESSIBLE, CENTER ON STALL, LOCATION PER GENERAL CONTRACTOR. PAINT INTERNATIONAL SYMBOL OF ACCESSIBILITY WHITE ON BLUE BACKGROUND. G.C. TO ENSURE SLOPE OF PAVEMENT AT ACCESSIBLE PARKING STALLS & ACCESS AISLE DOES NOT EXCEED 2% IN ALL DIRECTIONS.
- 10. REFER TO PHOTOMETRIC PLAN FOR LIGHT LOCATIONS, FOOTCANDLE PRINT OUT AND SPECIFICATIONS. FOUNDATION BY CONTRACTOR. CONTRACTOR TO FIELD VERIFY LOCATION OF PROPOSED LIGHT POLE WITH OWNER & G.C. AND THAT THERE ARE NO CONFLICTS WITH EXISTING & PROPOSED UTILITIES.
- 11. CONTRACTOR SHALL BE RESPONSIBLE TO PROVIDE AND INSTALL TRENCHING AND PVC SLEEVING UNDER ANY PAVEMENT AS REQUIRED FOR IRRIGATION, LIGHTING, SIGNS ETC. AS NEEDED PRIOR TO PAVING.

GENERAL NOTES:

- 1. PRIOR TO STARTING CONSTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE TO MAKE SURE THAT ALL REQUIRED PERMITS AND APPROVALS HAVE BEEN OBTAINED. NO CONSTRUCTION OR FABRICATION SHALL BEGIN UNTIL THE CONTRACTOR HAS RECEIVED AND THOROUGHLY REVIEWED ALL PLANS AND OTHER DOCUMENTS APPROVED BY ALL OF THE PERMITTING AUTHORITIES.
- 2. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THESE PLANS AND CITY OF BLOOMINGTON SPECIFICATIONS, LATEST EDITION.
- CONTRACTOR IS RESPONSIBLE FOR DEMOLITION AND REMOVAL OF ALL EXISTING STRUCTURES WHICH INTERFERE WITH NEW WORK AS SHOWN.
- 4. ALL DIMENSIONS, GRADES, EXISTING AND PROPOSED INFORMATION SHOWN ON THE PLANS SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. CONTRACTOR SHALL NOTIFY THE CONSTRUCTION MANAGER IF ANY DISCREPANCIES EXIST PRIOR TO PROCEEDING WITH CONSTRUCTION FOR NECESSARY PLAN OR GRADE CHANGES. NO EXTRA COMPENSATION SHALL BE PAID TO THE CONTRACTOR FOR WORK HAVING TO BE REDONE DUE TO INFORMATION SHOWN INCORRECTLY ON THESE PLANS IF SUCH NOTIFICATION HAS NOT BEEN GIVEN.
- 5. CONTRACTOR SHALL PROTECT ADJOINING PROPERTIES AND STRUCTURES FROM HAZARDS ASSOCIATED WITH HIS CONSTRUCTION ACTIVITIES & SHALL BE RESPONSIBLE FOR ALL DAMAGES TO PROPERTIES AND STRUCTURES THAT OCCUR AS A RESULT OF THESE ACTIVITIES.
- CONTRACTOR SHALL NOT IMPEDE EXISTING TRAFFIC CIRCULATION TO ADJACENT PROPERTIES.
- 7. CONTRACTOR SHALL PERFORM SWEEPING ON PRIVATE PARKING AREAS AND PUBLIC STREETS AT LEAST ONCE A WEEK, IF NEEDED. AND IN ADVANCE OF ALL RAIN EVENTS.
- 8. CONTRACTOR SHALL BE HELD FULLY RESPONSIBLE TO PREVENT AND ELIMINATE ANY DUST NUISANCE OCCASIONED BY AND DURING CONSTRUCTION, UNTIL THE PROJECT HAS BEEN COMPLETED.
- 9. CONTRACTOR SHALL PROVIDE TEMPORARY STREET SIGNS, LIGHTING, AND ADDRESSES DURING CONSTRUCTION PERIOD.
- 10. ALL PUBLIC SIDEWALKS SHALL NOT BE OBSTRUCTED DURING CONSTRUCTION UNLESS APPROVED BY CITY ENGINEER.
- 11. STORAGE OF MATERIALS OR EQUIPMENT SHALL NOT BE ALLOWED ON PUBLIC STREETS OR WITHIN PUBLIC RIGHT OF WAY.
- 12. CONTRACTOR TO PROVIDE TEMPORARY TRAFFIC CONTROL IN COMPLIANCE WITH MnDOT "TEMPORARY TRAFFIC CONTROL ZONE LAYOUT-FIELD MANUAL, LATEST EDITION, FOR ANY CONSTRUCTION IN PUBLIC ROW.
- 13. ALL WORK TO BE COMPLETED PER THE GEOTECH REPORT.

PARKING NOTES:

1. SEE ARCHITECTURAL PLANS FOR PARKING REQUIREMENTS





ALLIANT ENGINEERING

733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

UARE APARTMENTS

RD E. AND 34TH AVE SOUTH

MERICAN BOULEVARD E.

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE 04-21-21

Date License No.

QUALITY ASSURANCE/CONTROL

DATE

DATE

DATE

DATE

DATE

DATE

DISSUE

01-29-20 CITY SUBMITTAL

03-27-20 PROGRESS PLOT

05-06-20 REVISED CITY SUBMITTAL

06-17-20 ADDENDUM #1

07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS
01-29-21 100% GMP PERMIT SET
04-21-21 100% GMP / PERMIT SET


PROJECT TEAM DATA

DESIGNED: DMS/DJN

DRAWN: KDB/DMS

PROJECT NO: 190123

C-4.0

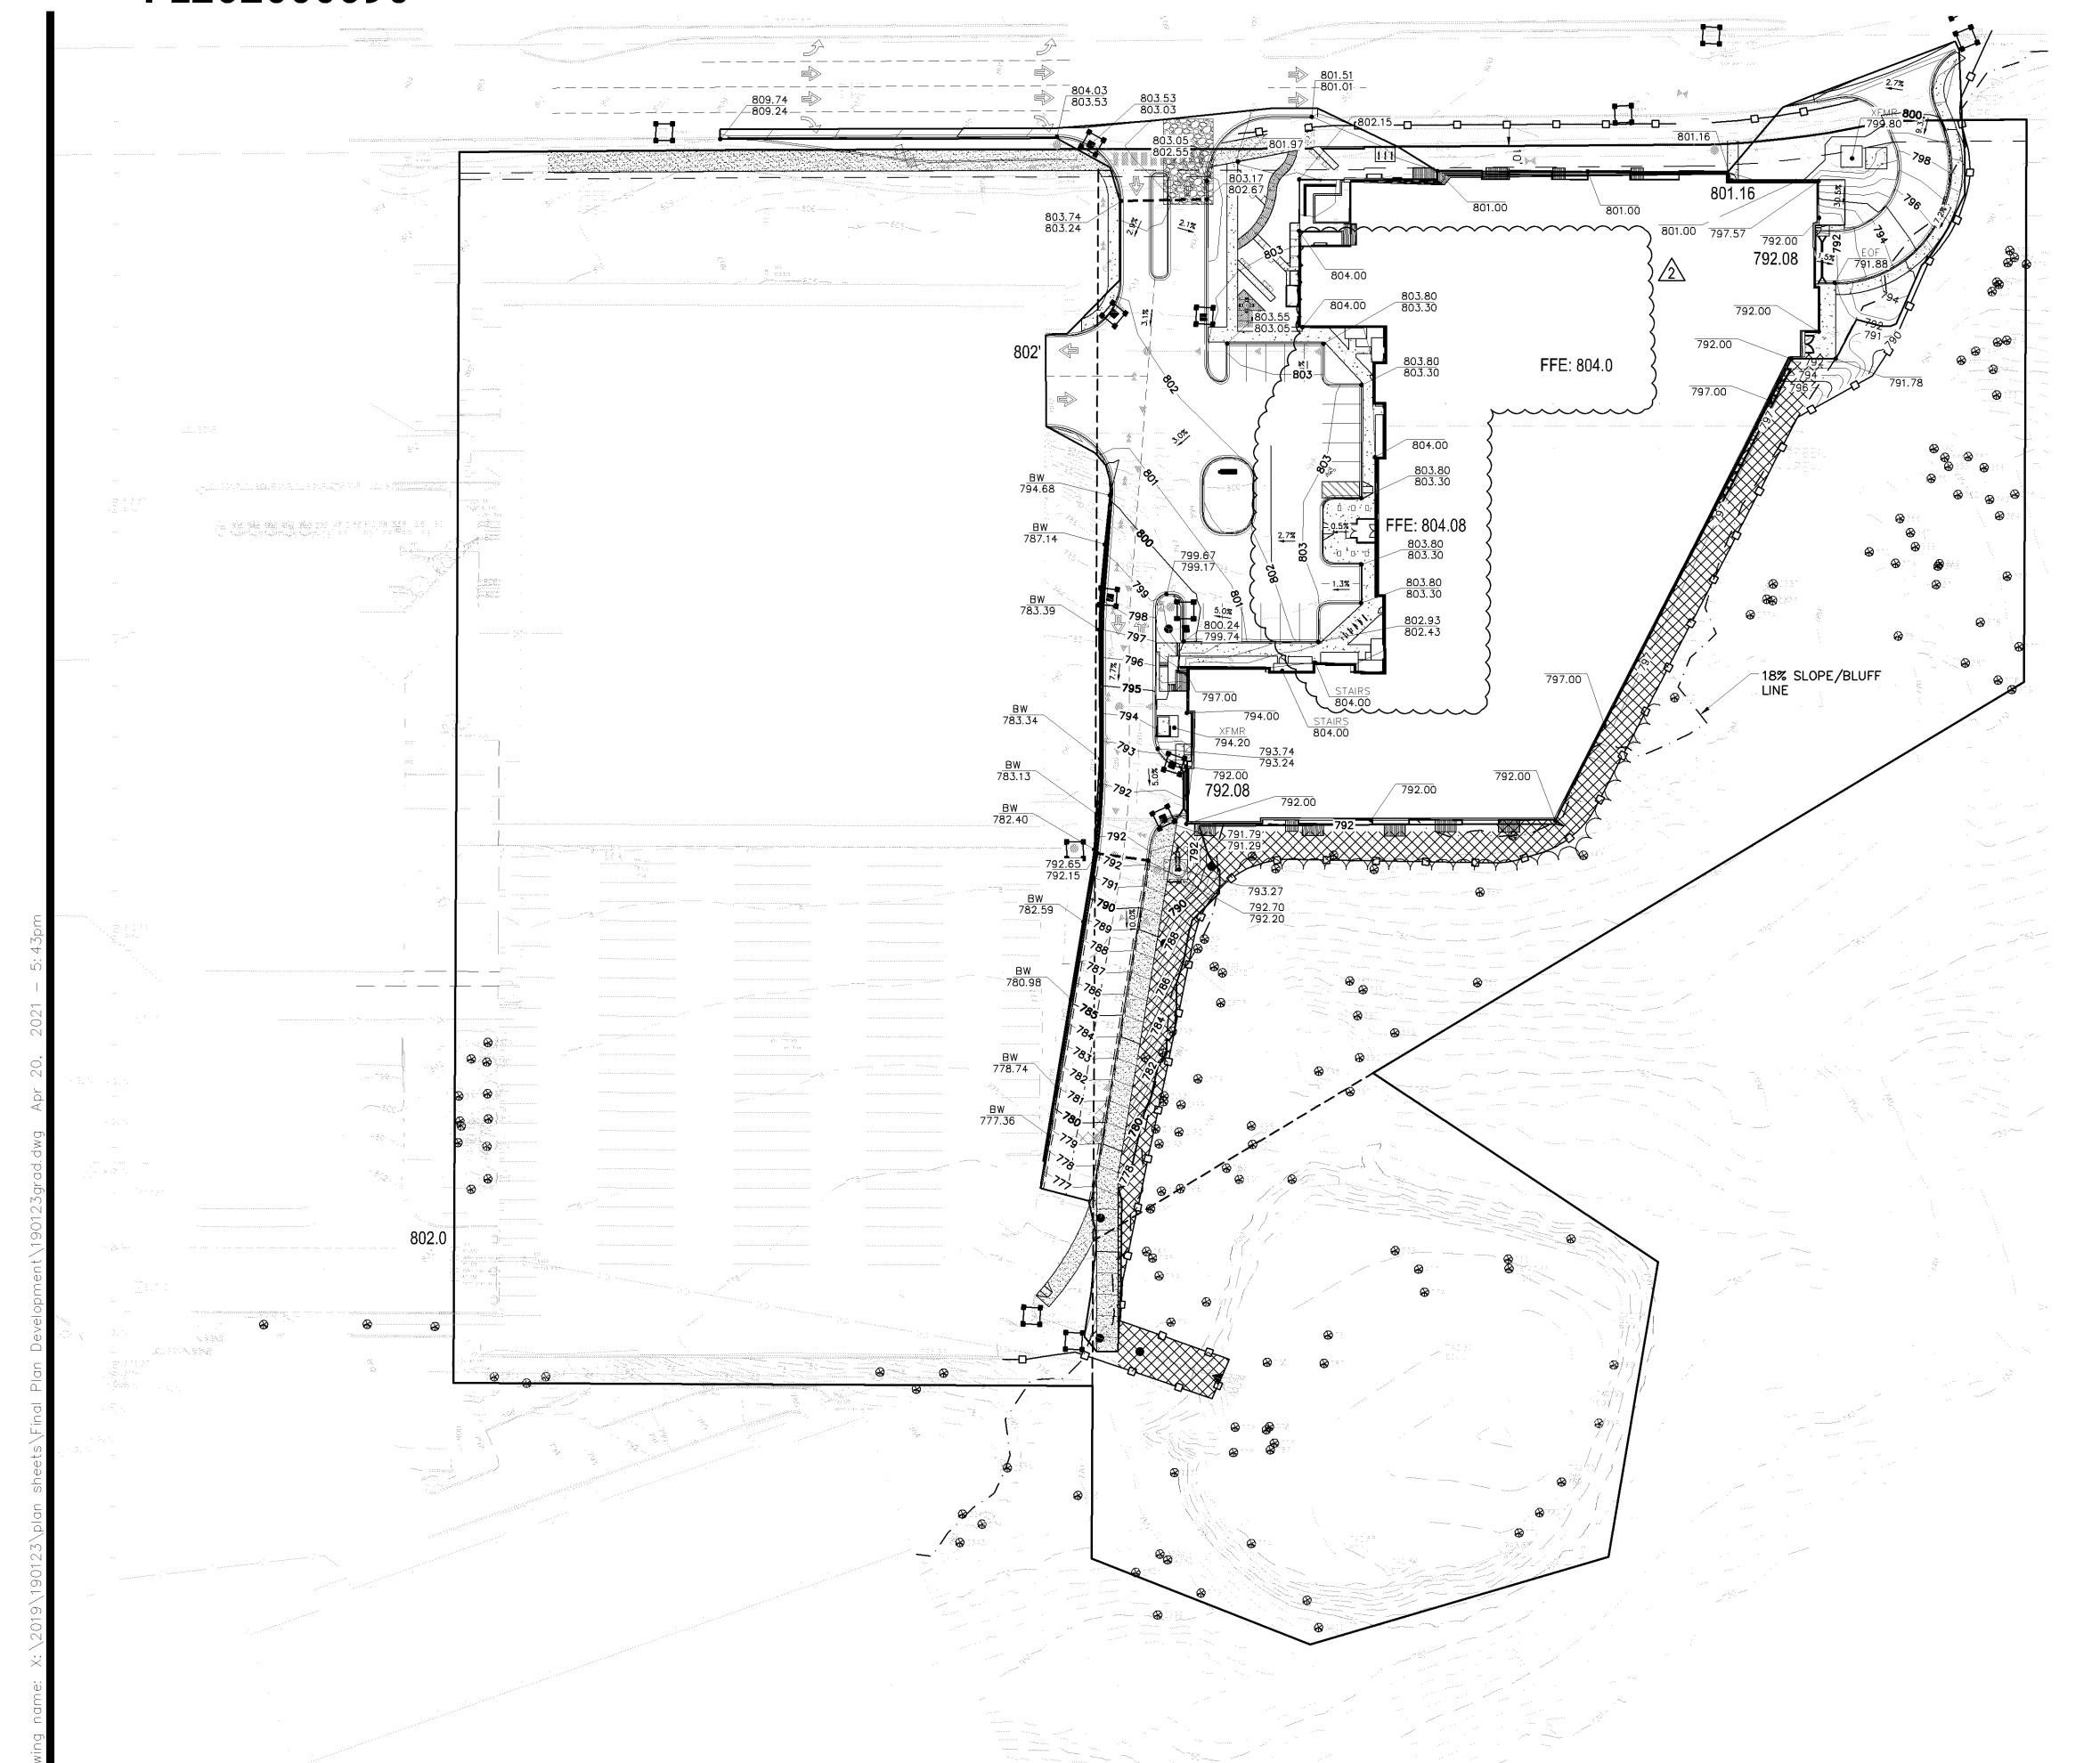

GRADING NOTES

- 1. ALL FINISHED GRADES SHALL SLOPE AWAY FROM PROPOSED BUILDINGS.
- THE CONTRACTOR SHALL KEEP THE ADJACENT ROADWAYS FREE OF DEBRIS AND PREVENT THE OFF—SITE TRACKING OF SOIL IN ACCORDANCE WITH THE REQUIREMENTS OF COUNTY, CITY AND WATERSHED.
- NOTIFY GOPHER STATE ONE CALL, AT (800)252-1166, 48 HOURS PRIOR TO START OF CONSTRUCTION.
- 4. ALL IMPROVEMENTS TO CONFORM WITH CITY OF BLOOMINGTON CONSTRUCTION STANDARDS SPECIFICATION, LATEST EDITION.
- 5. ROCK CONSTRUCTION ENTRANCES SHALL BE PROVIDED AT ALL CONSTRUCTION ACCESS POINTS.
- 6. REFER TO GEOTECHNICAL REPORT AND PROJECT MANUAL FOR SOIL CORRECTION REQUIREMENTS AND FREQUENT TESTING REQUIREMENTS. ALL WORK TO BE COMPLETED PER THE GEOTECH REPORT.
- 7. STRIP TOPSOIL PRIOR TO ANY CONSTRUCTION. REUSE STOCKPILE ON SITE. STOCKPILE PERIMETERS MUST BE PROTECTED WITH SILT FENCE.
- 8. PRIOR TO STARTING CONSTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE TO MAKE SURE THAT ALL REQUIRED PERMITS AND APPROVALS HAVE BEEN OBTAINED. NO CONSTRUCTION OR FABRICATION SHALL BEGIN UNTIL THE CONTRACTOR HAS RECEIVED AND THOROUGHLY REVIEWED ALL PLANS AND OTHER DOCUMENTS APPROVED BY ALL OF THE PERMITTING AUTHORITIES.
- 9. IMMEDIATELY FOLLOWING GRADING OF (3:1 OR GREATER) SIDE SLOPES AND DRAINAGE SWALES, WOOD FIBER BLANKET OR OTHER APPROVED SOIL STABILIZING METHOD (APPROVED BY ENGINEER) SHALL BE APPLIED OVER APPROVED SEED MIXTURE AND A MINIMUM OF 4" TOPSOIL.
- 10. THE GENERAL CONTRACTOR MUST DISCUSS DEWATERING PLANS WITH ALL SUBCONTRACTORS TO VERIFY NPDES REQUIREMENTS. IF DEWATERING IS REQUIRED DURING CONSTRUCTION, CONTRACTOR SHOULD CONSULT WITH EROSION CONTROL INSPECTOR AND ENGINEER TO DETERMINE APPROPRIATE METHOD
- 11. REFER TO STORMWATER POLLUTION PREVENTION PLAN (SWPPP) FOR ALL EROSION AND SEDIMENT CONTROL DEVICE LOCATION, DESCRIPTIONS, NOTES AND DETAILS INCLUDING CONCRETE WASHOUT STATION INSTRUCTIONS.
- 12. BUILDING PERMITS ARE REQUIRED FOR ALL RETAINING WALLS 4 FEET IN HEIGHT OR GREATER AND THE WALLS SHALL BE DESIGNED BY A STRUCTURAL ENGINEER WITH DESIGN REVIEWED AND APPROVED BY THE CITY PRIOR TO INSTALLATION.
- 13. A 4 FOOT SAFETY RAILING IS REQUIRED ATOP ALL WALLS 30" IN HEIGHT OR GREATER.

LEGEND:

964.5	PROPOSED CONTOUR PROPOSED SPOT ELEVATION
TW 964.5 BW 961.5	TOP OF WALL ELEVATION BOTTOM OF WALL ELEVATION
<u> 2.00</u> %	DIRECTION OF DRAINAGE
<u>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</u>	EMERGENCY OVERFLOW ROUTING RETAINING WALL PROPOSED LUMINARIES
****	EXISTING CATCH BASINS EXISTING STORM SEWER PROPOSED CATCH BASINS
>	PROPOSED STORM SEWER
	PROPOSED LIMITS OF CONSTRUCTION
	PROPOSED EASEMENT PROPERTY LINE
_ <u>DD</u> _	DRAINAGE DIVIDE
—	HEAVY DUTY SILT FENCE
	INLET PROTECTION
	ROCK CONSTRUCTION EXIT
	EROSION CONTROL BLANKET

+++++++ OUTFALL GUTTER



ALLIANT

733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

GRADING AND EROSION CONTROL F

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE

Date License No.

QUALITY ASSURANCE/CONTROL

DATE ISSUE

01-29-20 CITY SUBMITTAL

03-27-20 PROGRESS PLOT

05-06-20 REVISED CITY SUBMITTAL

06-17-20 ADDENDUM #1

07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA


DESIGNED: DMS/DJN

DRAWN: KDB/DMS

PROJECT NO: 190123

C-5.0



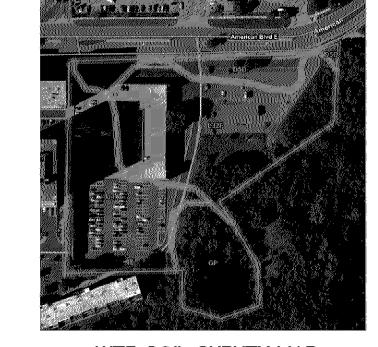

WEB SOIL SURVEY MAP

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
D5D	Dorset-Two Inlets complex, 12 to 18 percent slopes	0.9	10.3%
GP	Pits, gravel-Udipsamments complex.	1.3	15.4%
L32F	Hawick loamy sand, 20 to 40 percent slopes	3.8	44.1%
U4A	Urban land-Udipsamments (cut and fill land) complex, 0 to 2 percent slopes	2.6	30.2%
Totals for Area of Interest		8.7	100.0%

WEB SOIL SURVEY LEGEND

<u>EROSION CONTROL GENERAL NOTES:</u>

- NO LAND DISTURBING ACTIVITY SHALL OCCUR UNTIL A GRADING PERMIT HAS BEEN ISSUED FROM THE
- 2. BEST MANAGEMENT PRACTICES (BMP'S) REFER TO EROSION AND SEDIMENT CONTROL PRACTICES DEFINED BY THE MPCA PROTECTING WATER QUALITY IN URBAN AREAS AND THE MINNESOTA CONSTRUCTION SITE EROSION AND SEDIMENT CONTROL PLANNING HANDBOOK.
- ALL BMP'S SELECTED SHALL BE APPROPRIATE FOR THE TIME OF YEAR, SITE CONDITIONS, AND ESTIMATED DURATION OF USE.

ALL WORK AND MATERIALS SHALL BE CONSTRUCTED ACCORDING TO THE APPROVED PLANS. AN

- DEVIATION FROM THE APPROVED PLANS SHALL REQUIRE WRITTEN APPROVAL FROM THE ENGINEER OF
- 5. A COPY OF THESE PLANS MUST BE ON THE JOB SITE WHENEVER CONSTRUCTION IS IN PROGRESS. 6. THE BOUNDARIES OF THE LAND DISTURBANCE LIMITS SHOWN ON THE PLANS SHALL BE CLEARLY FLAGGED IN THE FIELD PRIOR TO CONSTRUCTION. NO DISTURBANCE ALLOWED BEYOND THE DISTURBED
- WHEREVER POSSIBLE, PRESERVE THE EXISTING TREES, GRASS, AND OTHER VEGETATIVE COVER TO HELP FILTER RUNOFF. 8. ESTABLISH A PERMANENT VEGETATIVE COVER ON ALL EXPOSED SOILS WHERE LAND IS COMING OUT OF AGRICULTURAL PRODUCTION. PLANT AS SOON AS POSSIBLE TO ESTABLISH DENSE GRASS FILTER
- 9. ALL TREES NOT LISTED FOR REMOVAL SHALL BE PROTECTED. DO NOT OPERATE EQUIPMENT WITHIN

PRIOR TO CONSTRUCTION AND TO MINIMIZE WEED GROWTH.

- THE DRIPLINE, ROOT ZONES OR WITHIN TREE PROTECTION FENCE AREAS. 10. ALL EROSION AND SEDIMENT CONTROL FACILITIES (BMP'S) SHALL BE INSTALLED AND IN OPERATION PRIOR TO LAND DISTURBANCE ACTIVITIES AND THEY SHALL BE SATISFACTORILY MAINTAINED UNTIL
- CONSTRUCTION IS COMPLETED AND THE POTENTIAL FOR EROSION HAS PASSED 11. SILT FENCE IS REQUIRED AT DOWN GRADIENT PERIMETER OF DISTURBED AREAS AND STOCKPILES.
- PROTECT ADJACENT WATERBODIES AND ADJACENT PROPERTIES FROM SEDIMENTATION AND STORM
- 12. THE BMP'S SHOWN ON THE PLANS ARE THE MINIMUM REQUIREMENTS FOR THE ANTICIPATED CONDITIONS. AS CONSTRUCTION PROGRESSES AND UNEXPECTED OR SEASONAL CONDITIONS DICTATE THE PERMITTEE/CONTRACTOR SHALL ANTICIPATE THAT MORE BMP'S WILL BE NECESSARY TO ENSURE EROSION AND SEDIMENT CONTROL ON THE SITE. DURING THE COURSE OF CONSTRUCTION, IT IS THE RESPONSIBILITY OF THE PERMITTEE/CONTRACTOR TO ADDRESS ANY NEW CONDITIONS THAT MAY BE CREATED BY CONSTRUCTION ACTIVITIES AND/OR CLIMATIC EVENTS AND TO PROVIDE ADDITIONAL BMP'S OVER AND ABOVE THE MINIMUM REQUIREMENTS SHOWN ON THE PLANS, AS MAY BE NEEDED TO PROVIDE EFFECTIVE PROTECTION OF WATER AND SOIL RESQUIRCES.
- 13. THE BMP'S SHALL BE INSPECTED DAILY BY THE PERMITTEE/CONTRACTOR AND MAINTAINED AS NECESSARY TO ENSURE THEIR CONTINUED FUNCTIONING. SILT FENCES SHALL BE CLEANED OR REPLACED AT SEDIMENT BUILDUP OF 1/3 OF THE FENCE HEIGHT.
- 14. LAND DISTURBING ACTIVITIES SHALL OCCUR IN INCREMENTS OF WORKABLE SIZE SUCH THAT ADEQUATE
- 15. OPERATE TRACK EQUIPMENT (DOZER) UP AND DOWN EXPOSED SOIL SLOPES ON FINAL PASS, LEAVIN TRACK GROOVES PERPENDICULAR TO THE SLOPE. DO NOT BACK-BLADE. LEAVE A SURFACE ROUGH TO
- 16. ALL AREAS DISTURBED BY CONSTRUCTION SHALL BE STABILIZED FROM EROSION WITHIN 7 DAYS OF SUBSTANTIAL COMPLETION OF GRADING IN THAT AREA. TEMPORARY SEED AND MULCH SHALL COVER ALL EXPOSED SOILS IF GRADING COMPLETION IS DELAYED LONGER THAN 7 DAYS. PERMANENT SEED AND MULCH OR SOD IS REQUIRED WITHIN 3 DAYS OF COMPLETION OF FINAL GRADING.
- 17. GENERAL TEMPORARY SEED SHALL BE MN STATE SEED MIX 22-112 @ 40 LBS. PER ACRE OR APPROVED EQUAL. PERMANENT SEED SHALL BE MN STATE SEED MIX 25-151 @ 120 LBS. PER ACRE OR APPROVED EQUAL. (PLANTING DATES PER MNDOT SEED MIX MANUAL) MULCH SHALL BE MNDOT TYPE 1 (CLEAN OAT STRAW) @ 2 TONS PER ACRE AND DISK ANCHORED IN PLACE OR APPROVED EQUAL. FERTILIZER SHALL BE 10-10-10 NPK PER ACRE (UNLESS P RESTRICTIONS APPLY) AND INCORPORATED INTO THE SEED BED.
- 18. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE PROPERLY DISPOSED OF WITHIN THIRTY (30) DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY
- 19. ALL CONSTRUCTION SITE WASTE SUCH AS DISCARDED BUILDING MATERIALS, CONCRETE TRUCK WASHOUT, CHEMICALS, LITTER, AND SANITARY WASTE MUST BE PROPERLY MANAGED AND COMPLY WITH THE MPCA AND THE CITY OF BLOOMINGTON RULES AND REQUIREMENTS.

- 1. IF UTILITY INSTALLATION WORK ENCOUNTERS GROUNDWATER, THE CONTRACTOR SHALL PROVIDE A PLAN TO THE CITY AND PROJECT ENGINEER FOR REVIEW. THE PLAN MUST BE SUBMITTED TO THE CITY FOR APPROVAL AT LEAST 10 DAYS PRIOR TO DISCHARGING INTO RECEIVING WATERS. THE PLAN AT MINIMUM SHALL INCLUDING A DEWATERING SYSTEM, WATER ROUTING, STORAGE, AND DISCHARGE LOCATION. THE DEWATERING PLAN MUST ENSURE THAT DISCHARGE WATER IS FREE OF SEDIMENT AND TURBID WATER IN ACCORDANCE WITH STATE AND LOCAL PERMIT REQUIREMENTS.
- IF ANY TEMPORARY DEWATERING IS REQUIRED ONSITE THE CONTRACTOR SHALL DISPOSE OF STORMWATER OR GROUND WATER BY USE OF PUMPS AND HOSES TO ACCEPTABLE DISCHARGE POINTS APPROVED BY THE CITY AND PROJECT ENGINEER.
- 3. ANY ACCUMULATED SEDIMENT ALONG EXISTING CURB AND GUTTER THAT HAS COLLECTED AS A RESULT OF DISCHARGING DEWATERING HOSES SHALL BE IMMEDIATELY REMOVED AND PROPERLY DISPOSED OF AFTER EACH DISCHARGING EVENT.

FILTRATION BMP NOTES:

- INSTALLATION OF INFILTRATION/FILTRATION PRACTICES SHALL BE DONE DURING PERIODS OF DRY WEATHER AND COMPLETED BEFORE A RAINFALL EVENT. PLACEMENT OF ENGINEERED SOILS SHALL BE ON DRY
- 2. EXCAVATION OF INFILTRATION AREAS SHALL BE COMPLETED USING A BACKHOE WITH A TOOTHED BUCKET.
- 3. THE BOTTOM EXCAVATION SURFACE OF INFILTRATION AREAS SHALL BE LEVEL WITHOUT DIPS OR SWALES.
- 4. DURING CONSTRUCTION, STORM WATER MUST BE ROUTED AROUND INFILTRATION AREAS UNTIL ALL
- 5. ENGINEERED SOIL SHALL REMAIN UNCONTAMINATED (NOT MIXED WITH OTHER SOIL) BEFORE AND DURING INSTALLATION.

EROSION CONTROL SCHEDULE:

- 1. PRIOR TO ANY CONSTRUCTION OR DEMOLITION, SILT FENCE AND FILTERS SHALL BE INSTALLED AS
- 2. CONTRACTOR SHALL INSTALL EROSION CONTROL DEVICES AS INDICATED ON THIS EROSION CONTROL PLAN AND ANY ADDITIONAL REQUIRED BASED ON MEANS, METHODS AND SEQUENCES OF CONSTRUCTION ALL EROSION CONTROL INSTALLATIONS SHALL REMAIN IN PLACE AND BE MAINTAINED IN GOOD CONDITION THE CONTRACTOR UNTIL THE SITE HAS BEEN RE-VEGETATED. CONTRACTOR MAY REMOVE NECESSARY SILT FENCING/FILTERS TO CONSTRUCT ROADWAYS, WHILE MAINTAINING ADEQUATE EROSION CONTROL IN
- 4. SUFFICIENT TOPSOIL SHALL BE STOCKPILED TO ALLOW FOR THE REPLACEMENT OF 6" OF TOPSOIL FOR DISTURBED AREAS TO BE RE-VEGETATED.
- 5. SOIL COMPACTION SHALL BE MINIMIZED IN PROPOSED PERVIOUS AREAS ONSITE AND AVOID ALTOGETHER IN PROPOSED INFILTRATION BASINS. SOIL SURFACES IN PROPOSED PERVIOUS AREAS COMPACTED DURING CONSTRUCTION SHALL BE DECOMPACTED THROUGH SOIL AMENDMENT OR DEEP RIPPING TO AN 18" DEPTH S. THE CONTRACTOR SHALL SCHEDULE SITE GRADING, UTILITY INSTALLATION AND PAVEMENT CONSTRUCTION SO THAT THE GENERAL SITE CAN BE MULCHED AND RE-SEEDED SOON AFTER DISTURBANCE. AREAS THAT WILL NOT BE SUBJECT TO CONSTRUCTION TRAFFIC SHALL BE SEEDED (MN STATE SEED MIX 22-112 @ 40 LBS/AC AND MULCHED OR SODDED WITHIN SEVEN (7) DAYS OF BEING DISTURBED.

SEDIMENT CONTROL PRACTICES

REQUIRED IN PART III.B 1.-3.

STILL DRAIN TO THE SURFACE WATER.

- 1. THE CONTRACTOR MUST EMPLOY SEDIMENT CONTROL PRACTICES AS NECESSARY TO MINIMIZE SEDIMENT FROM ENTERING SURFACE WATERS, INCLUDING CURB AND GUTTER SYSTEMS AND STORM SEWER INLETS. a. TEMPORARY OR PERMANENT DRAINAGE DITCHES AND SEDIMENT BASINS THAT ARE DESIGNED AS PART OF A SEDIMENT CONTAINMENT SYSTEM (E.G., DITCHES
- WITH ROCK-CHECK DAMS) REQUIRE SEDIMENT CONTROL PRACTICES ONLY AS APPROPRIATE FOR SITE CONDITIONS. b. IF THE DOWN GRADIENT SEDIMENT CONTROLS ARE OVERLOADED (BASED ON FREQUENT FAILURE OR EXCESSIVE MAINTENANCE REQUIREMENT), THE CONTRACTOR MUST INSTALL ADDITIONAL UPGRADIENT SEDIMENT CONTROL PRACTICES OR REDUNDANT BMPS TO ELIMINATE THE OVERLOADING, AND THE

SWPPP MUST BE AMENDED TO IDENTIFY THESE ADDITIONAL PRACTICES AS

INSTALLATION OF RIP RAP ALONG THE SHORELINE) IN THAT AREA IS COMPLETE. AN

UPLAND PERIMETER CONTROL PRACTICE MUST BE INSTALLED IF EXPOSED SOILS

- SEDIMENT CONTROL PRACTICES MUST BE ESTABLISHED ON ALL DOWN GRADIENT PERIMETERS AND BE LOCATED UPGRADIENT OF ANY BUFFER ZONES. THE PERIMETER SEDIMENT CONTROL PRACTICE MUST BE IN PLACE BEFORE ANY UPGRADIENT LAND-DISTURBING ACTIVITIES BEGIN. THESE PRACTICES SHALL REMAIN IN PLACE UNTIL FINAL STABILIZATION HAS BEEN ESTABLISHED IN ACCORDANCE WITH PART IV.G. A FLOATING SILT CURTAIN PLACED IN THE WATER IS NOT A SEDIMENT CONTROL BMP TO SATISFY PERIMETER CONTROL REQUIREMENTS IN THIS PART EXCEPT WHEN WORKING ON A SHORELINE AND BELOW THE WATERLINE. IN THOSE CASES, A FLOATING SILT CURTAIN CAN BE USED AS A PERIMETER CONTROL PRACTICE IF THE FLOATING SILT CURTAIN IS INSTALLED AS CLOSE TO SHORE AS POSSIBLE. IMMEDIATELY AFTER THE SHORT TERM CONSTRUCTION ACTIVITY (E.G.
- 3. THE CONTRACTOR SHALL RE-INSTALL ALL SEDIMENT CONTROL PRACTICES THAT HAVE BEEN ADJUSTED OR REMOVED TO ACCOMMODATE SHORT-TERM ACTIVITIES SUCH AS CLEARING OR GRUBBING, OR PASSAGE OF VEHICLES, IMMEDIATELY AFTER THE SHORT-TERM ACTIVITY HAS BEEN COMPLETED. THE CONTRACTOR SHALL COMPLETE ANY SHORT-TERM ACTIVITY THAT REQUIRES REMOVAL OF SEDIMENT CONTROL PRACTICES AS QUICKLY AS POSSIBLE. THE CONTRACTOR MUST REINSTALL SEDIMENT CONTROL PRACTICES BEFORE THE NEXT PRECIPITATION EVENT EVEN IF THE SHORT-TERM ACTIVITY IS NOT COMPLETE.
- . STORM DRAIN INLETS MUST BE PROTECTED BY APPROPRIATE BMPS DURI CONSTRUCTION UNTIL ALL SOURCES WITH POTENTIAL FOR DISCHARGING TO THE INLET HAVE BEEN STABILIZED. INLET PROTECTION MAY BE REMOVED FOR A PARTICULAR INLET IE A SPECIFIC SAFETY CONCERN (STREET FLOODING/FREEZING) HAS BEEN IDENTIFIED BY THE CONTRACTOR OR THE JURISDICTIONAL AUTHORITY (E.G., CITY/COUNTY/TOWNSHIP/MNDOT ENGINEER). THE CONTRACTOR MUST DOCUMENT THE NEED FOR REMOVAL IN THE SWPPP.
- TEMPORARY SOIL STOCKPILES MUST HAVE SILT FENCE OR OTHER FEFECTIVE SEDIMENT CONTROLS, AND CANNOT BE PLACED IN ANY NATURAL BUFFERS OF SURFACE WATERS, INCLUDING STORMWATER CONVEYANCES SUCH AS CURB AND BUTTER SYSTEMS, OR CONDUITS AND DITCHES UNLESS THERE IS A BYPASS IN PLACE FOR THE STORMWATER
- 6. WHERE VEHICLE TRAFFIC LEAVES ANY PART OF THE SITE (OR ONTO PAVED ROADS
- a. THE CONTRACTOR MUST INSTALL A VEHICLE TRACKING BMP TO MINIMIZE THE TRACK OUT OF SEDIMENT FROM THE CONSTRUCTION SITE. EXAMPLES OF VEHICLE TRACKING BMPS INCLUDE (BUT ARE NOT LIMITED TO) ROCK PADS, MUD MATS, SLASH MULCH, CONCRETE OR STEEL WASH RACKS, OR EQUIVALENT
- b. THE CONTRACTOR MUST USE STREET SWEEPING IF SUCH VEHICLE TRACKING BMPS ARE NOT ADEQUATE TO PREVENT SEDIMENT FROM BEING TRACKED ONTO THE STREET (SEE PART IV.E.5.D.).
- 7. THE CONTRACTOR MUST INSTALL TEMPORARY SEDIMENTATION BASINS AS REQUIRED
- 8. THE CONTRACTOR MUST MINIMIZE SOIL COMPACTION AND, UNLESS INFEASIBLE, PRESERVE TOPSOIL. MINIMIZING SOIL COMPACTION IS NOT REQUIRED WHERE THE FUNCTION OF A SPECIFIC AREA OF THE SITE DICTATES THAT IT BE COMPACTED.
- THE CONTRACTOR MUST PRESERVE A 50 FOOT NATURAL BUFFER OR (IF A BUFFER IS INFEASIBLE ON THE SITE) PROVIDE REDUNDANT SEDIMENT CONTROLS WHEN A SURFACE WATER IS LOCATED WITHIN 50 FFFT OF THE PROJECT'S FARTH DISTURBANCES AND STORMWATER FLOWS TO THE SURFACE WATER, NATURAL BUFFERS ARE NOT REQUIRED ADJACENT TO ROAD DITCHES, JUDICIAL DITCHES, COUNTY DITCHES, STORMWATER CONVEYANCE CHANNELS, STORM DRAIN INLETS, AND SEDIMENT BASINS. THE CONTRACTOR IS/ARE NOT REQUIRED TO ENHANCE THE QUALITY OF THE VEGETATION THAT ALREADY EXISTS IN THE BUFFER OR PROMDE VEGETATION IF NONE EXIST. HOWEVER, CONTRACTOR CAN IMPROVE THE NATURAL BUFFER WITH VEGETATION
- 10. IF THE CONTRACTOR INTEND TO USE POLYMERS, FLOCCULANTS, OR OTHER SEDIMENTATION TREATMENT CHEMICALS ON THE PROJECT SITE, THE CONTRACTOR MUST COMPLY WITH THE FOLLOWING MINIMUM REQUIREMENTS:
- a. THE CONTRACTOR MUST USE CONVENTIONAL EROSION AND SEDIMENT CONTROLS PRIOR TO CHEMICAL ADDITION TO ENSURE EFFECTIVE TREATMENT. CHEMICALS MAY ONLY BE APPLIED WHERE TREATED STORMWATER IS DIRECTED TO A EDIMENT CONTROL SYSTEM WHICH ALLOWS FOR FILTRATION OR SETTLEMENT OF THE FLOC PRIOR TO DISCHARGE.
- b. CHEMICALS MUST BE SELECTED THAT ARE APPROPRIATELY SUITED TO THE TYPES OF SOILS LIKELY TO BE EXPOSED DURING CONSTRUCTION, AND TO THE EXPECTED TURBIDITY, PH. AND FLOW RATE OF STORMWATER FLOWING INTO THE
- CHEMICALS MUST BE USED IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICES, AND WITH DOSING SPECIFICATIONS AND SEDIMENT REMOVAL DESIGN SPECIFICATIONS PROVIDED BY THE MANUFACTURER OR PROVIDER/SUPPLIER OF THE APPLICABLE CHEMICALS.

WINTER STABLIZATION:

- GRADING CONTRACTOR REQUIREMENTS IN THE CASE WHERE THE ONSET OF WINTER DOES YOT ALLOW FOR COMPLETION OF MASS GRADING AND FINAL SOIL STABLIZATION IN THE FALL: . MASS GRADING ACTIVITIES SHALL BE PLANNED AND PHASED IN A MANNER TO AVOID ANY
- 2. ALL FINAL GRADED AREAS SHALL BE STABILIZED PERMANENTLY BY GRADING CONTRACTOR WITH SEEDING, MULCHING, BLANKET, ETC. IN ACCORDANCE WITH PLANS PRIOR TO CONTRACTOR LEAVING THE SITE AT WINTER SHUT DOWN.
- THE GRADING CONTRACTOR IS RESPONSIBLE TO ENSURE THAT ALL TEMPORARY OR INCOMPLETE GRADING AREAS INCLUDING ALL STOCKPILES ARE STABILIZED WITH TEMPORARY SEEDING (MN STATE SEED MIX 22-112 @ 40/AC, MULCH (MNDOT TYPE 1)
- 4. ALL SIGNIFICANT DRAINAGE SWALES (TEMPORARY OR PERMANENT) SHALL BE STABILIZED WITH MNDOT CATEGORY 3 EROSION CONTROL BLANKET BY GRADING CONTRACTOR PRIOR TO LEAVING THE SITE AT WINTER SHUT DOWN.

INSPECTIONS AND MAINTENANCE

- 1. THE CONTRACTOR MUST ENSURE THAT A TRAINED PERSON (AS IDENTIFIED IN ITEM 2221.2.b) WILL ROUTINELY INSPECT THE ENTIRE CONSTRUCTION SITE AT LEAST ONCE EVERY SEVEN (7) DAYS DURING ACTIVE CONSTRUCTION AND WITHIN 24 HOURS AFTER A RAINFALL EVENT GREATER THAN 0.5 INCHES IN 24 HOURS. FOLLOWING AN INSPECTION THAT OCCURS WITHIN 24 HOURS AFTER A RAINFALL EVENT, THE NEXT INSPECTION MUST BE CONDUCTED WITHIN SEVEN (7) DAYS AFTER THE RAINFALL EVENT.
- 2. ALL INSPECTIONS AND MAINTENANCE CONDUCTED DURING CONSTRUCTION MUST BE RECORDED WITHIN 24 HOURS IN WRITING AND THESE RECORDS MUST BE RETAINED WITH THE SWPPP IN ACCORDANCE WITH PART III.E. RECORDS OF EACH INSPECTION AND MAINTENANCE ACTIVITY SHALL INCLUDE:
- a.DATE AND TIME OF INSPECTIONS
- b. NAME OF PERSON(S) CONDUCTING INSPECTIONS c. FINDINGS OF INSPECTIONS, INCLUDING THE SPECIFIC LOCATION WHERE
- CORRECTIVE ACTIONS ARE NEEDED d. CORRECTIVE ACTIONS TAKEN (INCLUDING DATES, TIMES, AND PARTY
- COMPLETING MAINTENANCE ACTIVITIES) e. DATE AND AMOUNT OF ALL RAINFALL EVENTS GREATER THAN 1/2 INCH (0.5 INCHES) IN 24 HOURS. RAINFALL AMOUNTS MUST BE OBTAINED BY A PROPERLY MAINTAINED RAIN GAUGE INSTALLED ONSITE, A WEATHER STATION THAT IS WITHIN 1 MILE OF YOUR LOCATION OR A WEATHER REPORTING SYSTEM THAT PROVIDES SITE SPECIFIC RAINFALL DATA FROM RADAR
- f. IF ANY DISCHARGE IS OBSERVED TO BE OCCURRING DURING THE INSPECTION. A RECORD OF ALL POINTS OF THE PROPERTY FROM WHICH THERE IS A DISCHARGE MUST BE MADE, AND THE DISCHARGE SHOULD BE DESCRIBED (I.E., COLOR, ODOR, FLOATING, SETTLED, OR SUSPENDED SOLIDS, FOAM, OIL SHEEN, AND OTHER OBVIOUS INDICATORS OF POLLUTANTS) AND PHOTOGRAPHED.
- g. ANY AMENDMENTS TO THE SWPPP PROPOSED AS A RESULT OF THE INSPECTION MUST BE DOCUMENTED WITHIN SEVEN (7) CALENDAR DAYS.
- 3.INSPECTION FREQUENCY ADJUSTMENT
- a. WHERE PARTS OF THE PROJECT SITE HAVE PERMANENT COVER, BUT WORK REMAINS ON OTHER PARTS OF THE SITE, THE CONTRACTOR MAY REDUCE INSPECTIONS OF THE AREAS WITH PERMANENT COVER TO IN WHERE CONSTRUCTION SITES HAVE PERMANENT COVER ON ALL EXPOSED
- SOIL AREAS AND NO CONSTRUCTION ACTIVITY IS OCCURRING ANYWHERE ON THE SITE. THE SITE MILIST BE INSPECTED DURING NON-FROZEN GROUND. CONDITIONS AT LEAST ONCE PER MONTH FOR A PERIOD OF TWELVE (12) MONTHS. FOLLOWING THE TWELFTH MONTH OF PERMANENT COVER AND CONSTRUCTION ACTIVITY, INSPECTIONS MAY BE TERMINATED UNTIL CONSTRUCTION ACTIVITY IS ONCE AGAIN INITIATED UNLESS THE CONTRACTOR S/ARE NOTIFIED IN WRITING BY THE MPCA THAT EROSION ISSUES HAVE BEEN DETECTED AT THE SITE AND INSPECTIONS NEED TO RESUME. & WHERE WORK HAS BEEN SUSPENDED DUE TO FROZEN GROUND CONDITIONS.
- MAINTENANCE SCHEDULE MUST BEGIN WITHIN 24 HOURS AFTER RUNOFF OCCURS AT THE SITE OR 24 HOURS PRIOR TO RESUMING CONSTRUCTION, WHICHEVER COMES FIRST.
- 4. THE CONTRACTOR IS/ARE RESPONSIBLE FOR THE INSPECTION AND MAINTENANCE OF TEMPORARY AND PERMANENT WATER QUALITY MANAGEMENT BMPS, AS WELL AS ALL EROSION PREVENTION AND SEDIMENT CONTROL BMPS, UNTIL ANOTHER PERMITTEE HAS OBTAINED COVERAGE UNDER THIS PERMIT OR IE PROJECT HAS UNDERGONE FINAL STABILIZATION, AND HAS NOT BEEN SUBMITTED TO THE MPCA.
- 5. THE CONTRACTOR MUST INSPECT ALL EROSION PREVENTION AND SEDIMENT CONTROL BMPS AND POLLUTION PREVENTION MANAGEMENT MEASURES TO ENSURE INTEGRITY AND EFFECTIVENESS DURING ALL ROUTINE AND POST-RAINFALL EVENT INSPECTIONS. ALL NONFUNCTIONAL BMPS MUST BE REPAIRED, REPLACED, OR SUPPLEMENTED WITH FUNCTIONAL BMPS BY TI END OF THE NEXT BUSINESS DAY AFTER DISCOVERY, OR AS SOON AS FIELD CONDITIONS ALLOW ACCESS UNLESS ANOTHER TIME FRAME IS SPECIFIED BELOW. THE CONTRACTOR MUST INVESTIGATE AND COMPLY WITH THE FOLLOWING INSPECTION AND MAINTENANCE REQUIREMENTS:
- a. ALL PERIMETER CONTROL DEVICES MUST BE REPAIRED, REPLACED, OR SUPPLEMENTED WHEN THEY BECOME NONFUNCTIONAL OR THE SEDIMENT REACHES ONE-HALF (1/2) OF THE HEIGHT OF THE DEVICE. THESE REPAIRS MUST BE MADE BY THE END OF THE NEXT BUSINESS DAY AFTER DISCOVERY, OR THEREAFTER AS SOON AS FIELD CONDITIONS ALLOW ACCESS.
- b. TEMPORARY AND PERMANENT SEDIMENTATION BASINS MUST BE DRAINED. AND THE SEDIMENT REMOVED WHEN THE DEPTH OF SEDIMENT COLLECTED IN THE BASIN REACHES ONE-HALF (1/2) THE STORAGE VOLUME. DRAINAGE AND REMOVAL MUST BE COMPLETED WITHIN 72 HOURS OF DISCOVERY, OR AS SOON AS FIELD CONDITIONS ALLOW ACCESS (SEE PART IV.D.).
- c. SURFACE WATERS, INCLUDING DRAINAGE DITCHES AND CONVEYANCE SYSTEMS, MUST BE INSPECTED FOR EVIDENCE OF EROSION AND SEDIMENT DEPOSITION DURING EACH INSPECTION. THE CONTRACTOR MUST REMOVE ALL DELTAS AND SEDIMENT DEPOSITED IN SURFACE WATERS, INCLUDING DRAINAGE WAYS, CATCH BASINS, AND OTHER DRAINAGE SYSTEMS, AND RESTABILIZE THE AREAS WHERE SEDIMENT REMOVAL RESULTS IN EXPOSED SOIL. THE REMOVAL AND STABILIZATION MUST TAKE PLACE WITHIN SEVEN (7) DAYS OF DISCOVERY UNLESS PRECLUDED BY LEGAL, REGULATORY, OR PHYSICAL ACCESS CONSTRAINTS. THE CONTRACTOR SHALL USE ALL REASONABLE EFFORTS TO OBTAIN ACCESS. IF PRECLUDED, REMOVAL AND STABILIZATION MUST TAKE PLACE WITHIN SEVEN (7) CALENDAR DAYS OF OBTAINING ACCESS. THE CONTRACTOR IS/ARE RESPONSIBLE FOR CONTACTING ALL LOCAL, REGIONAL, STATE AND FEDERAL AUTHORITIES AND RECEIVING ANY APPLICABLE PERMITS, PRIOR TO CONDUCTING ANY WORK IN SURFACE WATERS.
- CONSTRUCTION SITE VEHICLE EXIT LOCATIONS MUST BE INSPECTED FOR EVIDENCE OF OFF-SITE SEDIMENT TRACKING ONTO PAVED SURFACES. TRACKED SEDIMENT MUST BE REMOVED FROM ALL PAVED SURFACES BOTH ON AND OF SITE WITHIN 24 HOURS OF DISCOVERY, OR, IF APPLICABLE, WITHIN A SHORTER TIME TO AVOID A SAFETY HAZARD TO USERS OF PUBLIC STREETS. d.STREETS AND OTHER AREAS ADJACENT TO THE PROJECT MUST BE INSPECTED FOR EVIDENCE OF OFF-SITE ACCUMULATIONS OF SEDIMENT, IF SEDIMENT IS PRESENT, IT MUST BE REMOVED IN A MANNER AND AT A FREQUENCY SUFFICIENT TO MINIMIZE OFF-SITE IMPACTS (E.G., FUGITIVE SEDIMENT IN STREETS COULD BE WASHED INTO STORM SEWERS BY THE NEXT RAIN AND/OR POSE A SAFETY HAZARD TO USERS OF PUBLIC
- 6. ALL INFILTRATION AREAS MUST BE INSPECTED TO ENSURE THAT NO SEDIMENT FROM ONGOING CONSTRUCTION ACTIVITY IS REACHING THE INFILTRATION AREA ALL INFILTRATION AREAS MUST BE INSPECTED TO ENSURE THAT EQUIPMENT IS NOT BEING DRIVEN ACROSS THE INFILTRATION AREA.

SPECIAL REQUIREMENT

IMPAIRED WATER

- A RIVER IS CLASSIFIED AS AN IMPAIRED THE FOLLOWING REQUIREMENTS APPLY FOR PERMITTES MUST IMMEDIATELY INITIATE STABILIZATION OF EXPOSED SOIL AREAS, AS DESCRIBED IN ITEM 8.4, AND E STABILIZATION WITHIN SEVEN (7) CALENDAF HE CONSTRUCTION ACTIVITY IN THAT PORTION TEMPORARILY OR PERMANENTLY CEASES.
- LOCATIONS THAT SERVE AN AREA WITH FIVE (5) OR MORE ACRES DISTURBED AT ONE TIME. ALSO, A MANDATORY STORMWATER POLLUTION PREVENTION ALSO, A MANDATORY STORMWATER POLLUTION PREVENTION PLAN (SWPPP) REVIEW IS REQUIRED BY THE MPCA IF THE PROJECT WILL DISTURB OVER 50 ACRES AND HAS A DISCHARGE POINT ON THE PROJECT WITHIN 1 MILE (AERIAL RADIUS MEASUREMENT) OF, AND FLOWS TO THE IMPAIRED WATER. OWNERS MUST SUBMIT THE APPLICATION FOR COVERAGE AND THE SWPPP AT LEAST 30—DAYS BEFORE THE CONSTRUCTION START DATE. THE SWPPP CAN BE ATTACHED ELECTRONICALLY WHEN USING THE ONLINE APPLICATION.

POLLUTION PREVENTION MANAGEMENT MEASURES

- THE CONTRACTOR SHALL IMPLEMENT THE FOLLOWING POLLUTION PREVENTION MANAGEMENT MEASURES ON THE SITE:
- 1 STORAGE, HANDLING, AND DISPOSAL OF CONSTRUCTION PRODUCTS, MATERIALS, AND WASTES: THE CONTRACTOR SHALL COMPLY WITH THE FOLLOWING TO MINIMIZE THE EXPOSURE TO STORMWATER OF ANY OF THE PRODUCTS, MATERIALS, OR WASTES. PRODUCTS OR WASTES WHICH ARE EITHER NOT A SOURCE OF CONTAMINATION TO STORMWATER OR ARE DESIGNED TO BE EXPOSED TO STORMWATER ARE NOT HELD TO THIS REQUIREMENT:
- A RUILDING PRODUCTS THAT HAVE THE POTENTIAL TO LEACH POLLUTANTS MUST BE UNDER COVER (E.G., PLASTIC SHEETING OR TEMPORARY ROOFS) TO PREVENT THE DISCHARGE OF POLLUTANTS OR PROTECTED BY A SIMILARLY EFFECTIVE MEANS DESIGNED TO MINIMIZE CONTACT WITH STORMWATER.
- LANDSCAPE MATERIALS MUST BE UNDER COVER (E.G., PLASTIC SHEETING OR TEMPORARY ROOFS) TO PREVENT THE DISCHARGE OF POLLUTANTS OR PROTECTED BY SIMILARLY EFFECTIVE MEANS DESIGNED TO MINIMIZE CONTACT WITH STORMWATER. c.HAZARDOUS MATERIALS. TOXIC WASTE. (INCLUDING OIL. DIESEL FUEL. GASOLINE. HYDRAULIC

b. PESTICIDES, HERBICIDES, INSECTICIDES, FERTILIZERS, TREATMENT CHEMICALS, AND

- FLUIDS, PAINT SOLVENTS, PETROLEUM-BASED PRODUCTS, WOOD PRESERVATIVES, ADDITIVES, CURING COMPOUNDS, AND ACIDS) MUST BE PROPERLY STORED IN SEALED CONTAINERS TO PREVENT SPILLS, LEAKS OR OTHER DISCHARGE. RESTRICTED ACCESS STORAGE AREAS MUST BE PROVIDED TO PREVENT VANDALISM, STORAGE AND DISPOSAL OF HAZARDOUS VASTE OR HAZARDOUS MATERIALS MUST BE IN COMPLIANCE WITH MINN. R. CH. 7045 INCLUDING SECONDARY CONTAINMENT AS APPLICABLE.
- d. SOLID WASTE MUST BE STORED, COLLECTED AND DISPOSED OF PROPERLY IN COMPLIANCE
- e. PORTABLE TOILETS MUST BE POSITIONED SO THAT THEY ARE SECURE AND WILL NOT BE TIPPED OR KNOCKED OVER. SANITARY WASTE MUST BE DISPOSED OF PROPERLY IN ACCORDANCE WITH MINN, R. CH. 7041.
- 2 FLIFLING AND MAINTENANCE OF EQUIPMENT OR VEHICLES: SPILL PREVENTION AND RESPONSE HE CONTRACTOR SHALL TAKE REASONABLE STEPS TO PREVENT THE DISCHARGE OF SPILLED OR LEAKED CHEMICALS, INCLUDING FUEL, FROM ANY AREA WHERE CHEMICALS OR FUEL WILL BE LOADED OR UNLOADED INCLUDING THE USE OF DRIP PANS OR ABSORBENTS UNLESS INFEASIBLE, THE CONTRACTOR MUST CONDUCT FUELING IN A CONTAINED AREA UNLESS NFEASIBLE. THE CONTRACTOR MUST ENSURE ADEQUATE SUPPLIES ARE AVAILABLE AT ALL TIMES TO CLEAN UP DISCHARGED MATERIALS AND THAT AN APPROPRIATE DISPOSAL METHOD. IS AVAILABLE FOR RECOVERED SPILLED MATERIALS. THE CONTRACTOR MUST REPORT AND CLEAN UP SPILLS IMMEDIATELY AS REQUIRED BY MINN. STAT. § 115.061, USING DRY CLEAN UP MEASURES WHERE POSSIBLE.
- 3. VEHICLE AND EQUIPMENT WASHING: IF THE CONTRACTOR WASH THE EXTERIOR OF VEHICLES OR EQUIPMENT ON THE PROJECT SITE, WASHING MUST BE LIMITED TO A DEFINED AREA OF THE SITE. RUNOFF FROM THE WASHING AREA MUST BE CONTAINED IN A SEDIMENT BASIN OF SIMILARLY EFFECTIVE CONTROLS AND WASTE FROM THE WASHING ACTIVITY MUST BE PROPERLY DISPOSED OF. THE CONTRACTOR MUST PROPERLY USE AND STORE SOAPS, DETERGENTS, OR SOLVENTS. NO ENGINE DEGREASING IS ALLOWED ON SITE.
- 4. CONCRETE AND OTHER WASHOUTS WASTE: THE CONTRACTOR MUST PROVIDE EFFECTIVE CONTAINMENT FOR ALL LIQUID AND SOLID WASTES GENERATED BY WASHOUT OPERATIONS (CONCRETE, STUCCO, PAINT, FORM RELEASE OILS, CURING COMPOUNDS AND OTHER CONSTRUCTION MATERIALS) RELATED TO THE CONSTRUCTION ACTIVITY. THE LIQUID AND SOLID WASHOUT WASTES MUST NOT CONTACT THE GROUND. AND THE CONTAINMENT MUST BE DESIGNED SO THAT IT DOES NOT RESULT IN RUNOFF FROM THE WASHOUT OPERATIONS OR AREAS. LIQUID AND SOLID WASTES MUST BE DISPOSED OF PROPERLY AND IN COMPLIANCE WITH MPCA RULES. A SIGN MUST BE INSTALLED ADJACENT TO EACH WASHOUT FACILIT THAT REQUIRES SITE PERSONNEL TO UTILIZE THE PROPER FACILITIES FOR DISPOSAL OF CONCRETE AND OTHER WASHOUT WASTES.

FINAL STABLIZATION

- THE CONTRACTOR MUST ENSURE FINAL STABILIZATION OF THE SITE. FINAL STABILIZATION IS NOT COMPLETE UNTIL ALL REQUIREMENTS OF ITEMS 13.2-13.7 BELOW:
- 13.2 PERMITTEES MUST COMPLETE ALL CONSTRUCTION ACTIVITY AND MUST INSTALL PERMANENT COVER OVER ALL AREAS PRIOR TO SUBMITTING THE NOT. VEGETATIVE COVER MUST CONSIST OF A UNIFORM PERENNIAL VEGETATION WITH A DENSITY OF 70 PERCENT OF ITS EXPECTED FINAL GROWTH. VEGETATION IS NOT REQUIRED WHERE THE FUNCTION OF A SPECIFIC AREA DICTATES NO VEGETATION, SUCH AS IMPERVIOUS SURFACES OR THE BASE OF A SAND FILTER.
- 13.3 PERMITTEES MUST CLEAN THE PERMANENT STORMWATER TREATMENT SYSTEM OF ANY ACCUMULATED SEDIMENT AND MUST ENSURE THE SYSTEM MEETS ALL APPLICABLE REQUIREMENTS IN SECTION 15 THROUGH 19 AND IS OPERATING AS DESIGNED. 13.4 PERMITTEES MUST REMOVE ALL SEDIMENT FROM CONVEYANCE SYSTEMS PRIOR TO
- SUBMITTING THE NOTICE OF TERMINATION (NOT). 13.5 PERMITTEES MUST REMOVE ALL TEMPORARY SYNTHETIC EROSION PREVENTION AND SEDIMENT CONTROL BMPS PRIOR TO SUBMITTING THE NOT. PERMITTEES MAY LEAVE BMPS DESIGNED TO DECOMPOSE ON-SITE IN
- 13.6 FOR RESIDENTIAL CONSTRUCTION ONLY, PERMIT COVERAGE TERMINATES ON INDIVIDUAL LOTS IF THE STRUCTURES ARE FINISHED AND TEMPORARY EROSION PREVENTION AND DOWNGRADIENT PERIMETER CONTROL IS COMPLETE. THE RESIDENCE SELLS TO THE HOMEOWNER, AND THE PERMITTEE DISTRIBUTES THE MPCA'S "HOMEOWNER FACT SHEET" TO
- 13.7 FOR CONSTRUCTION PROJECTS ON AGRICULTURAL LAND (E.G., PIPELINES ACROSS CROPLAND). PERMITTEES MUST RETURN THE DISTURBED LAND TO ITS PRECONSTRUCTION AGRICULTURAL USE PRIOR TO SUBMITTING THE NOT.

ACTIVE SWPPP LEGEND CONSTRUCTION SEQUENCE JUL AUG SEP OCT NOV DEC JAN MULCH BERM FIBER ROLLS / MULCH SOCKS SILT FENCE TEMPORARY MULCH COVER TEMPORARY HYDROMULCH FROSION CONTROL BLANKET ROCK DRIVEWAY / ROCK PADS INLET PROTECTION DEVICES PAVEMENT (DRIVEWAY/ROADS) SOD STOCKPILES NOTE: CONTRACTOR, GENERAL CONTRACTOR OR SWPPP INSPECTOR TO COMPLETE TABLE AS GRADING PROGRESSES

SEDIMENT BARRIERS SILT FENCE (MnDOT 3886) . CURB LOG

ROCK WEEPER

- 4. SEDIMENT LOGS INLET PROTECTION DEVICES WIMCO (MnDOT TYPE A & C)
- 2. INFRASAFE STORM DRAIN/CULVERT ANTI-TRACKING CONTROL I. 2" CRUSHED CLEAR ROCK (LAND DEVELOPMENT)
- TEMPORARY SEED MIX I. MN STATE SEED MIX 21-112 (WINTER WHEAT COVER CROP) 2. MN STATE SEED MIX 22-III
- (OATS COVER CROP) PERMANENT SEED MIX/STABILIZATION I. MN STATE SEED MIX 25-151 (RESIDENTIAL TURF)
- STABILIZATION BMP'S
 I. EROSION CONTROL BLANKET MnDOT CATEGORY
 - CONCRETE WASHOUT IS DONE TRUCK BY TRUCK WITH A MOBILE WASHOUT SYSTEM PROVIDED AND COMPLETED BY THE CONCRETE CONTRACTOR.

PERTINENT PERMITS:

1. CITY OF BLOOMINGTON GRADING PERMIT NPDES

CONSTRUCTION SEQUENCE

- THE INTENDED SEQUENCING OF MAJOR SITE CONSTRUCTION ACTIVITIES IS AS FOLLOWS:
- INSTALL STABILZED ROCK CONSTRUCTION ENTRANCE.
- . INSTALL SILT FENCE AROUND SITE, AS SHOWN ON PLAN. INSTALL ORANGE CONSTRUCTION FENCE AROUND EXISTING TREES TO BE PROTECTED.

17. WHEN ALL CONSTRUCTION ACTIVITY IS COMPLETE AND THE SITE IS STABILIZED BY EITHER SEED OR SOD AND LANDSCAPING, REMOVE SILT FENCE AND RESEED ANY

- 4. CLEAR AND GRUB SITE. STRIP AND STOCKPILE TOPSOIL.
- 5. ROUGH GRADING OF SITE. STABILIZE DENUDED AREAS AND STOCKPILES.
- 3. INSTALL SANITARY SEWER, WATER MAIN, STORM SEWER AND SERVICES. 9. INSTALL SILT FENCE/INLET PROTECTION AROUND CATCH BASINS.
- 10. INSTALL STREET SECTION.
- 11. INSTALL CURB AND GUTTER. 12. BITUMINOUS ON STREETS.
- 13. INSTALL SMALL UTILITIES (GAS, ELECTRIC, PHONE, CABLE, ETC.)
- 14. FINE GRADE BOULEVARD, LANDSCAPE AREAS, SEED AND MULCH. 15. REMOVE ACCUMULATED SEDIMENT. 16. FINAL GRADE.

AREAS DISTURBED BY THE REMOVAL.

SWPPP BMP QUANTITIES (PER PLAN):

271 LF SILT FENCE INLET PROTECTION 23 EA ROCK CONSTRUCTION ENTRANCE 1 EA SEED/SOD POST GRADING AREA 0.52 AC

EROSION CONTROL RESPONSIBLE PARTIES:

SWPPP INSPECTION:

CONTRACTOR:

OWNER/DEVELOPER:

KAEDING & RON CLARK

ENGINEER: DAVE NASH LISCENSE NO. 40922 ALLIANT ENGINEERING, INC 233 PARK AVE S. STE 300

MINNEAPOLIS, MN 55415

DNASH@ALLIANT-INC.COM

ALLIANT ENGINEERING

733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

> NOT Z CTIO $\mathbf{\omega}$ Q N

Ш

NO

SWP

0

0

0

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under

DAVID NASH, PE

MINNESOTA

License No. QUALITY ASSURANCE/CONTROL

the laws of the State of

DATE DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL 06-17-20 ADDENDUM #1 07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS

04-21-21 100% GMP / PERMIT SET

01-29-21 100% GMP PERMIT SET

PROJECT TEAM DATA

DESIGNED: DRAWN: PROJECT NO:

DMS/DJN

KDB/DMS

190123

PL202000090 **NOTES** - CONNECT TO EXISTING STRUCTURE 1. EXISTING UTILITIES, SERVICE LOCATIONS AND ELEVATIONS SHALL BE VERIFIED IN FIELD SAWCUT, REMOVE AND RIM=798.99 PRIOR TO CONSTRUCTION. REPLACE WITH MATCHING CORE CUT 15" INV S=794.05 EXISTING 12" WATERMAIN BITUMINOUS SECTION EX 12" INV W=793.8 REPLACE 8" G.V. 2. MAINTAIN A MIN. 18" VERTICAL SEPARATION AT ALL PIPE CROSSINGS. LOWER WATERMAIN 6" BENDS TO MAINTAIN 10' EX 18" INV N=793.8 CONNECT TO EXISTING 8" G.V. $\sqrt{2}$ AS NECESSARY W/ BENDS AND FITTINGS. WATER AND SANITARY SEWER LINES TO MAINTAIN SEPARATION FROM SANITARY FM 48 LF - 15" EX 24" INV E=793.3 10' HORIZONTAL SEPARATION. LOCATION WITH 8" TEE, 8"x6" PROVIDE VERTICAL BENDS TO RCP @ 0.4% REDUCER TO HYDRANT. MAINTAIN MINIMUM 4' 3. CONTRACTOR IS RESPONSIBLE FOR ALL PERMITS PRIOR TO THE START OF CONSTRUCTION. -NEW HYDRANT WITH CONNECT TO EXISTING 12" MAIN SEPARATION FROM INVERT OF WITH 10" WET TAP AND 10" G.V. CB 200 4. PROVIDE POLYSTYRENE INSULATION FOR ALL STORM SEWER AND WATERMAIN CROSSINGS CB 200 AND 6" WATER MAIN-WHERE VERTICAL OR HORIZONTAL SEPARATION IS LESS THAN 3'. EXISTING HYDRANT -15 LF 8" WM -263 LF 10" WM NEW HYDRANT WITH TO BE SALVAGED -10" TEE 5. ALL UTILITY WORK SHALL COMPLY WITH THE CITY OF BLOOMINGTON ENGINEERING -8" TEE AND GV 6" G.V.-AND PROVIDED TO WITH G.V. SPECIFICATIONS, LATEST EDITION. W/ 10"x8" REDUCER THE CITY 6. NOTIFY GOPHER STATE ONE CALL 48 HOURS IN ADVANCE OF ANY UTILITY WORK. REMOVE EXISTING INSTALL 2" OF 8"X8"X6" TEE INSULATION: 7. PROVIDE TEMPORARY TRAFFIC CONTROL IN COMPLIANCE WITH MNDOT "TEMPORARY TRAFFIC 2 CONTROL ZONE LAYOUTS-FIELD MANUAL" LATEST REVISION, FOR ANY CONSTRUCTION 801.16 - 35 LF 8" WMWITHIN PUBLIC R.O.W. FIELD VERIFY EXISTING 8" 10" BENDS 7 LF 10" COMBINED STUB LOCATION AND INVERT-RD 1 CONNECTION FIRE AND DOMESTIC < EXISTING HYDRANT 8. ALL STORM SEWER CASTINGS SHALL BE NEENAH OR APPROVED EQUAL. WATER SERVICE. (MAX 50' 15" INV=794.24 TO BE SALVAGED SAN MH 6-ENSURE WATER 9. ALL SANITARY SEWER MANHOLES PER CITY OF BLOOMINGTON STANDARDS FROM HYD.)-AND PROVIDED TO METERS ARE INSTALLED WITHIN 10. WATERMAIN, SERVICES, AND VALVES SHALL BE INSTALLED WITH MINIMUM 8.0' AND A TRENCH DRAIN TO BE MAXIMUM OF 10.0' OF COVER. 10.0' OF THIS POINT ADS YARD DRAIN **CBMH 111** PUMPED INTO ROOF DRAIN _____ RIM=803.0 SYSTEM AND CHECK VALVE, 8" SAN SERVICE 1 11. ALL WATERMAIN SHALL BE DIP WITH POLYWRAP PER CITY OF BLOOMINGTON STANDARDS. 6" PVC INV=798.0 REFER TO PLUMBING 12. ALL SANITARY BUILDING SERVICES SHALL BE PVC SDR 26, SDR 35 ALLOWED ON MAINS CB 112 WHERE DEPTH PERMITS. ALL SANITARY FORCEMAIN TO BE C-900 PVC. SIZE TO BE FFE = 804.0'(4FT BUILD) DETERMINED BY OTHERS. 8" SAN STUB 13. CONTRACTOR TO VERIFY ALL BUILDING CONNECTION POINTS WITH ARCHITECTURAL PLANS. SAN MH 5 14. ALL ROOF DRAINS (RD) SHALL HAVE AN AT GRADE DOWNSPOUT OVERFLOW. ele anderdal — pelacion — placas [] elea C-900 PVC 15. ALL ROOF WATER SHALL BE ROUTED TO THE SOUTH FILTRATION BASIN PER THE SANITARY APPROVED STORMWATER MANAGEMENT PLAN. FORCEMAIN -205 LF 8" WM 16. MAINTAIN AND VERIFY 10' HORIZONTAL SEPARATION IS PROVIDED BETWEEN ALL WATERMAIN AND CATCHBASIN/MANHOLES. –8" TEE WITH (2) 🛁 17. CONTRACTOR TO COORDINATE ALL REQURIED WATER MAIN SHUT-OFF WITH CITY OF ≤8"x6" REDUCERS BLOOMINGTON AND CONTACT PROPERTY OWNERS CB 109 (4FT BUILD) -18. CONTRACTOR TO ORDER AND PAY CITY FOR ALL WET TAPS ON SITE. -HYDRANT AND G.V., TYP. WITH 6" LEAD 19. INSTALL INTERIOR CHIMNEY SEALS ON ALL SANITARY SEWER MANHOLES. CBMH 110 20. UTILITY AND MECHANICAL CONTRACTORS MUST COORDINATE THE INSTALLATION OF ALL WATER AND SEWER SERVICE PIPES INTO THE BUILDING TO ACCOMMODATE CITY INSPECTION CONSTRUCT CBMH 300 ON 21. COMBINATION FIRE AND DOMESTIC SERVICES MUST TERMINATE WITH A THREAD ON FLANGE SAN MH 4 EXISTING 18" RAMP OUTLET PIPE OR AN MJ TO FLANGE ADAPTER. _155 LF 8" WM RIM = 778.40-1/2 SAN SERVICE 1 22. ALL COMPONENTS OF THE WATER SYSTEM, UP TO THE WATER METER OR FIRE SERVICE (FIELD VERIFY) 18" INV=771.54 -EQUIPMENT MUST UTILIZE PROTECTIVE INTERNAL COATINGS MEETING CURRENT ANSI/AWWA STANDARDS FOR CEMENT MORTAR LINING OR SPECIAL COATINGS. THE USE OF UNLINED OR UNCOATED PIPE IS NOT ALLOWED. - CBMH 107 23. ALL WORK TO BE COMPLETED PER THE GEOTECH REPORT. TRENCH DRAIN SANITARY SEWER SCHEDULE: MII PIPE PIPE SLOPE PIPE INVERT INVERT RIM FLEY GRADE STRUCTURE MANHOLE BUILD OR COVER [FT] - CBMH 106 (- CBMH 105 SAN MH 3-801.30 801.20 805.75 SDR-35 PVC SAN MH6 EX SAN MH 0.004 N/A -LIFT STATION, TO BE 796.00 790.31 N/A SAN MII5 SAN MH 2-8" SAN SERV 1 DESIGNED BY OTHERS 8" SAN STUB -HYDRANT, WM 8FT DEEP SAN MII5 SDR-35 PVC PROPOSED SANITARY/STORM SDR-35 PVC 10" SAN SERV 1 SAN MH4 18FT AND 20FT DEEP ABANDON IN PLACE EXISTING SDR-35 PVC SAN MH3 **CBMH 104** 18" RAMP 0" SAN SERV 2 OUTLET DRAIN SDR-35 PVC SAN MHI -INSTALL 1" OF INSULATION STORM SEWER SCHEDULE: 10" SAN SERVICE 2 . DIA. |P. SLOPE|P. TYPE| | FROM | PIPE TO RIM | STR. | TO [IN] LENGTH [FT] INVERT INVERT | ELEV | TYPE | FROM S [%] Know what's below. EX MH 15 0.004RCP 48.1 794.2 Call before you dig. ABANDON IN PLACE EXISTING 18" RAMP OUTLET DRAIN-RD 3 **Dial 811** CB 112 | CBMH 11 797.7 | 795.9 | 801.7 | 2x3 | R-3067-V | 4.0 12 0.040 **HDPE** 45.0 CBMH 111 | CBMH 1 0.040 **HDPE** 795.9 790.4 802.3 | 48 REMOVE EXISTING PIPE AND OUTLET, INSTALL CBMH 110 | CBMH 108 0.040 **HDPE** 16.6 789.7 799.6 48 R-3067-V 9.2 CBMH 103 33LF 15" RCP AND CONNECT TO CBMH 102 CB 109 | CBMH 108 794.2 | 792.8 | 798.2 | 2x3 | R-3067-V | 4.0 0.040HDPE 35.2 798.9 48 R-3067-V 10.9 CBMH 108 CBMH 1 0.050 PROTECT EXISTING LOT DRAINAGE STRUCTURE AND INLET WITH 4' SUMP AND SAFL BAFFLE |CBMH 10 25.0 785.5 0.018 **HDPE** 785.1 CBMH 107 | CBMH 106 0.030 HDPE 34.3 786.0 785.0 791.9 48 **CBMH** 300 0.010 RCP\ 32.0 771.5 771.2 778.4 48 R-4342 6.9 RCP 33.0 771.2 770.7 791.3 48 R-3067-V 20.1 CBMH 106 | CBMH 105 0.01518 789.1 48 | R-3067-V | 18.4 W/ 15CY CBMH 105 | CBMH 10 0.020769.9 RIPRAP 789.0 48 R-1642 23.2 0.060 RCP 131.9 769.9 762.0 RD 3 |CBMH 10 0.049 RCP 785.0 FIELD VERIFY AND PROTECT EXISTING 8" CBMH 103 | CBMH 10 762.0 757.5 776.6 48 R-1642 | 14.6 RESTORE SLOPE 0.080 OUTLET TO EXISTING POND -WITH EROSION 771.2 48 757.5 755.8 R-1642 | 17.8 CBMH 102 | CBMH 10 0.085 RCP CONTROL FABRIC 27 0.022RCP 745.8 760.1 48 R-1642 | 18.3 **LEGEND:** PIPE CROSSING SCHEDUL

PROPOSED HYDRANT

PROPOSED EASEMENT

EXISTING WATERMAIN

EXISTING EASEMENTS

EXISTING STORM SEWER

EXISTING SANITARY SEWER

EXISTING SANITARY MANHOLE

EXISTING STORM MANHOLE/CATCH BASIN

PROPOSED LIMITS OF CONSTRUCTION

20

IN

---- PROPOSED STORM SEWER

PROPOSED WATERMAIN

/MANHOLE

PROPOSED SANITARY GRAVITY SEWER

— PROPOSED SANITARY FORCEMAIN

PROPOSED STORM CATCH BASIN

PROPOSED SANITARY MANHOLE

PROPOSED SUBGRADE DRAINTILE

PROPOSED BUTTERFLY/GATE VALVE

ALLIANT ENGINEERING

733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080

www.alliant-inc.com

SOUT AN ON.

hereby certify that this plan specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE 21836 04-21-21 License No.

QUALITY ASSURANCE/CONTROL

DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL)6-17-20|ADDENDUM #1 07-23-20 REVIEW SET 07-30-20 CONSTRUCTION DOCUMENT 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA DESIGNED: DMS/DJN DRAWN: KDB/DMS PROJECT NO: 190123

PIPE ABOVE PIPE BELOW ELEV. ABOVE ELEV. BELOW DISTANCE BETWEEN

794.3

791.57

789.86

783.15

771.34

778.4

772.87

792.45

2.28

2.00

3.52

2.73

11.89

5.27

10.04

2.81

2.86

796.58

793.57

793.38

785.88

783.23

783.67

782.91

795.26

786.32

STORM

WATER

STORM

WATER

WATER

WATER

WATER

STORM

WATER

WATER

SANITARY

SANITARY

SANITARY

SANITARY

SANITARY

SANITARY

STORM

C-6.0


JOINT -


─ B618 OR B624 C&G


NOTE:

- EACH DRIVEWAY PANEL NOT TO EXCEED 100 SF.

100 - NONRESIDENTIAL DRIVEWAY APPROACH WITH BOULEVARD SIDEWALK NOT TO SCALE 100 - Drwy (Commercial).dwg 5/2015

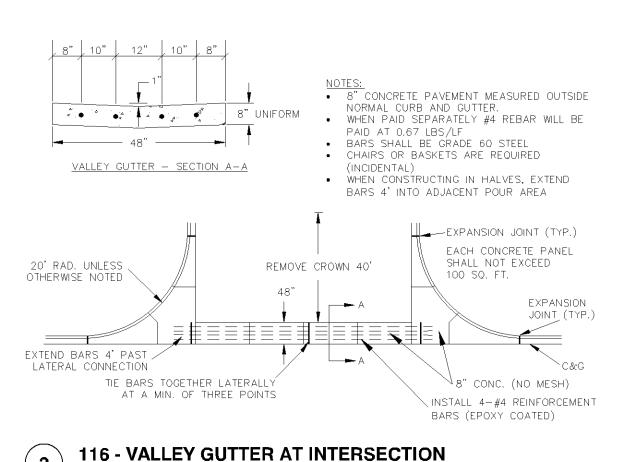


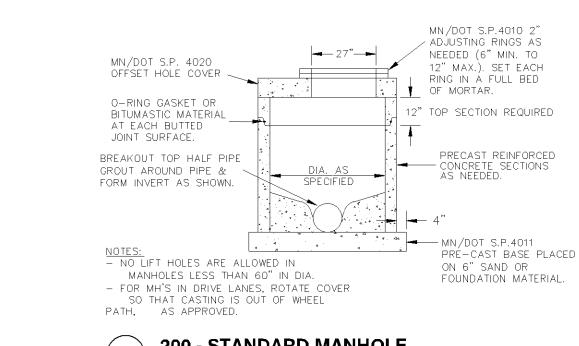

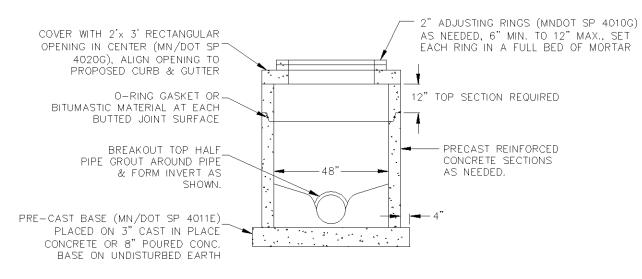






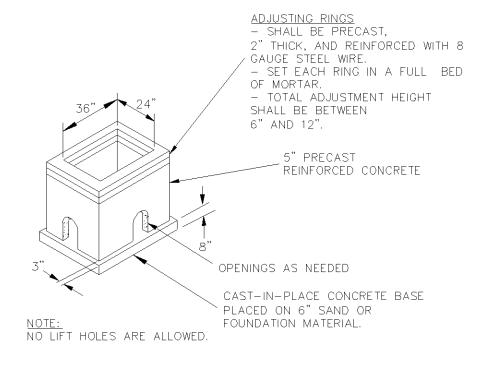




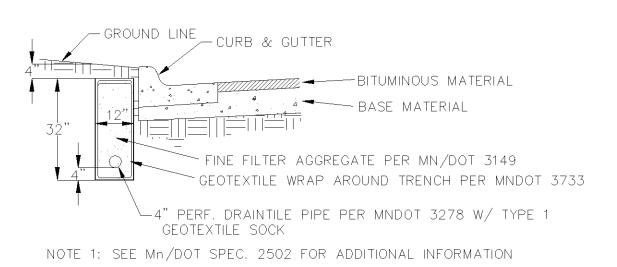


116 - Valley Gutter.dwg 5/2015




NOTE 2: INSTALL 20 LF AT CATCH BASINS AS NOTED ON THE PLANS

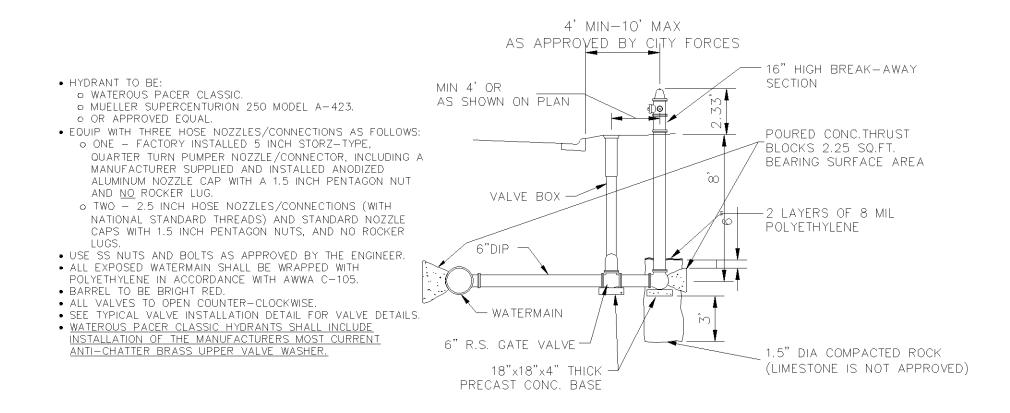




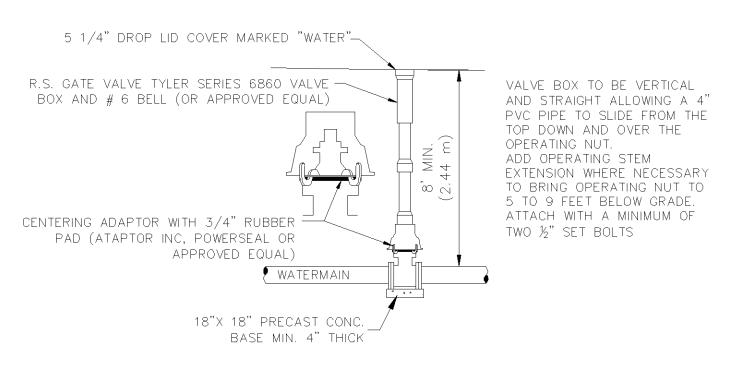



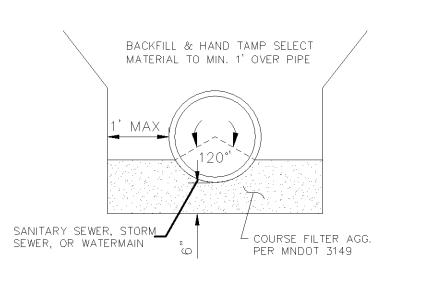




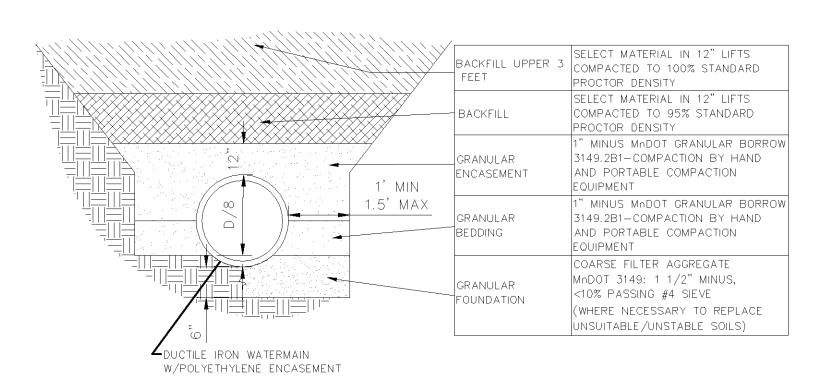

200 - STD_MH.DWG 9/2013







www.alliant-inc.com

SOUTH ENT Σ QUAR

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of


DAVID NASH	ME
04-21-21	
Date	License No.

BY	DATE
DATE	ISSUE
01-29-20	CITY SUBMITTAL
03-27-20	PROGRESS PLOT
05-06-20	REVISED CITY SUBMITTAL
06-17-20	ADDENDUM #1
07-23-20	REVIEW SET
07-30-20	CONSTRUCTION DOCUMENTS
01-29-21	100% GMP PERMIT SET
04-21-21	100% GMP / PERMIT SET

04-21-21 100%	GMP / PERMIT SET
PROJECT TEAM	DATA
PROJECT TEAM DESIGNED:	DATA DMS/DJN

C-7.0

PROJECT NO:

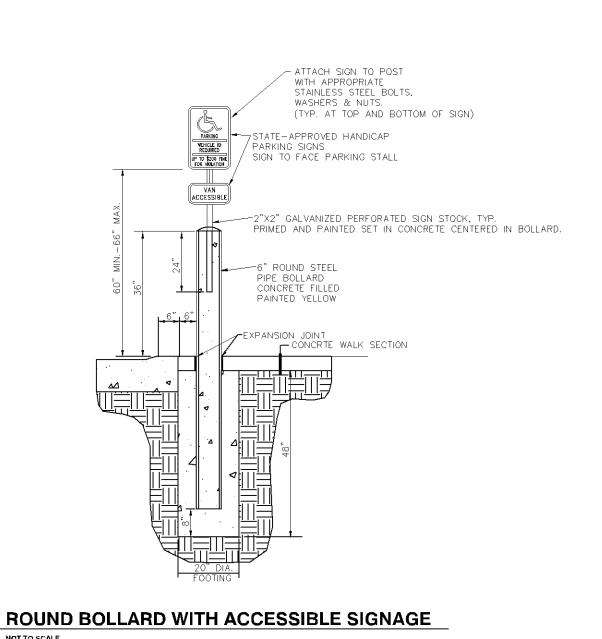


- COMPACTED SUBGRADE

B612 CURB AND GUTTER

(SURFACE VARIES) -

FINISHED GRADE

(SURFACE VARIES) -

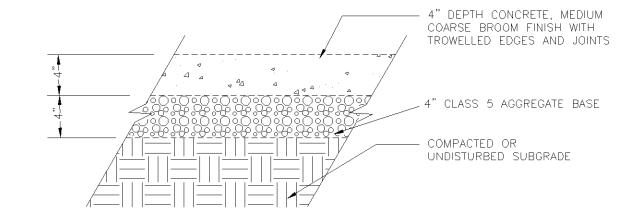

6" DEPTH CONCRETE, MEDIUM COARSE BROOM FINISH WITH TROWELLED EDGES AND JOINTS

, 4" CLASS 5 AGGREGATE BASE

— 6" MNDOT 3A21 OR 3A41

UNDISTURBED SUBGRADE

BEPLACEMENT

ENISTRA; STREBALK


GAM CONCRETE SUCCHALA - POLL DEPYN ON EXISTENS SOUNT CONFIDENTALS

- COMPACTED OR

CONCRETE SIDEWALK


*GEOTECH TO VERIFY FINAL DESIGN

CONCRETE PAVEMENT

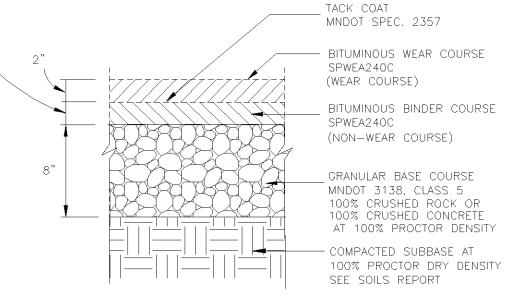

*GEOTECH TO VERIFY FINAL DESIGN



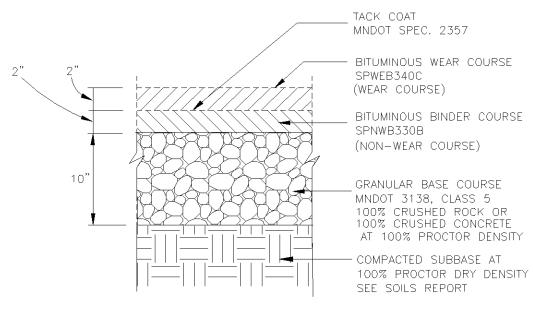

*GEOTECH TO VERIFY FINAL DESIGN

HEAVY-DUTY BITUMINOUS PAVEMENT

- PAVED SURFACE (PAVEMENT TYPE VARIES)

COMPACTED AGGREGATE

BASE SIZE NO. 53 AT 95%

- COMPACTED SUBGRADE

PROCTOR DENSITY

- CONCRETE CURB & GUTTER


- CONCRETE CURB


- PAVED SURFACE (PAVEMENT TYPE VARIES)


COMPACTED AGGREGATE


BASE SIZE NO. 53 AT 95%


B612 CURB AND GUTTER - OUTFALL

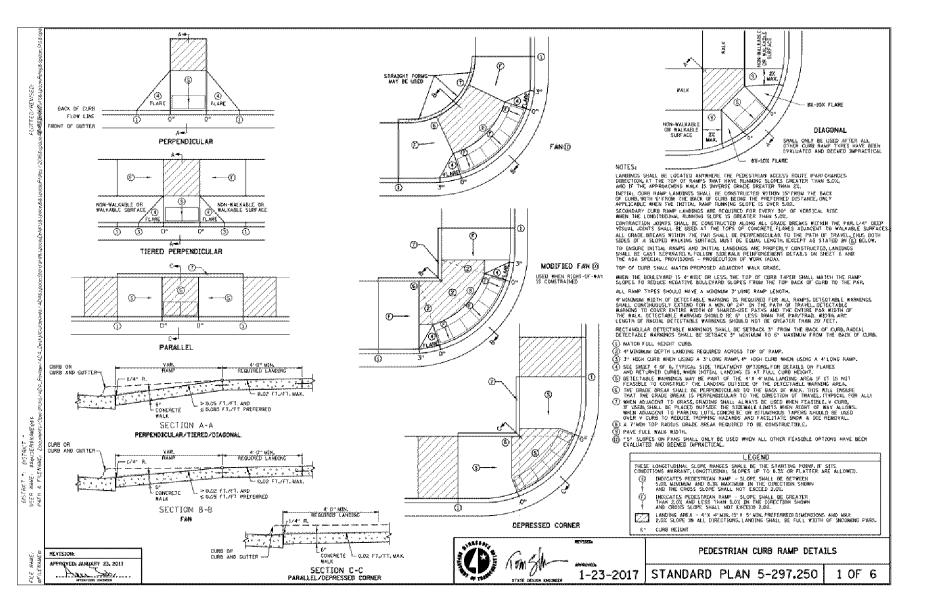

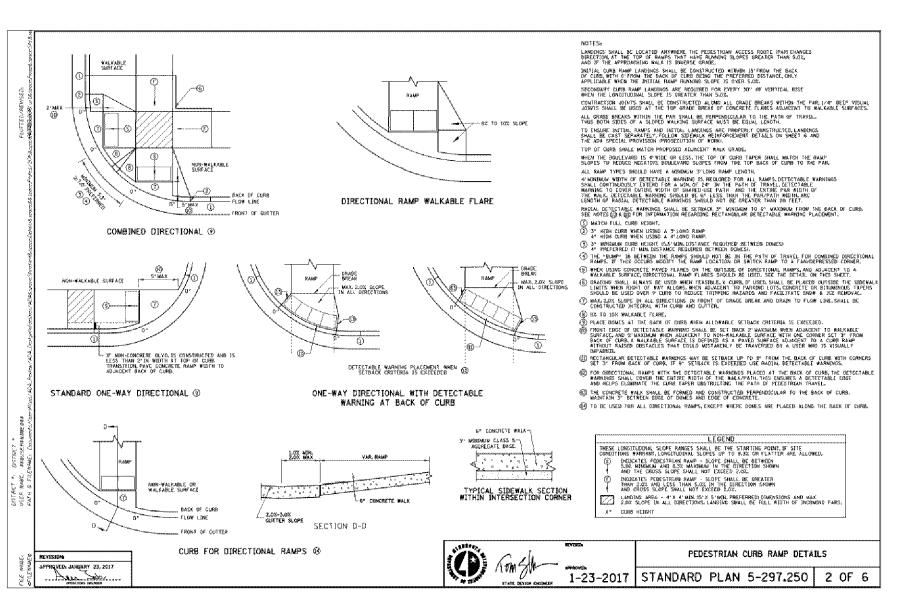

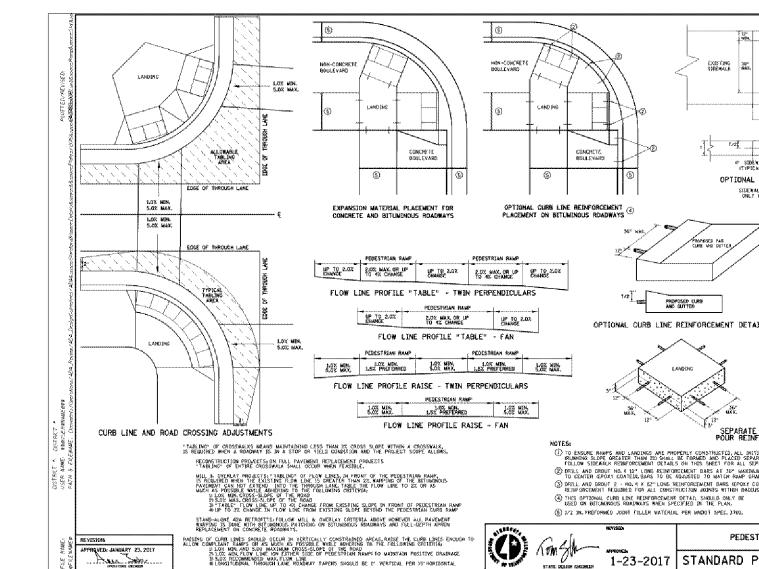

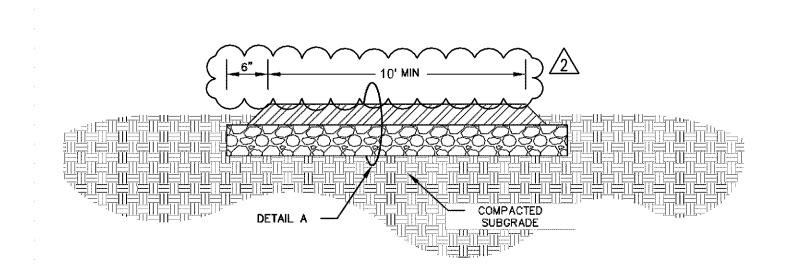


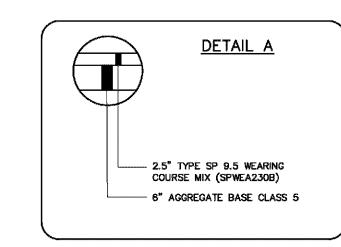


PLACE ALL ASPHALT IN ONE LIFT TO PROVIDE A MINIMUM OF 2.5" COMPACTED DEPTH.

PROVIDE A MINIMUM BASE OF 6" COMPACTED AGGREGATE. IMPORT ADDITIONAL MATERIALS IF MILLING FAILS TO PRODUCE ADEQUATE BASE MATERIAL.

TAMP ALL TRAIL EDGES AT A 45° BEVEL. CONTRACTOR IS RESPONSIBLE FOR ROUGH GRADING EDGES OF TRAIL CORRIDOR WITH ON-SITE MATERIAL. HOLD GRADES 3" LOWER THAN FINISHED TRAIL SURFACE TO ALLOW FOR ADDITIONAL TOPSOIL PLACEMENT AND SEED.



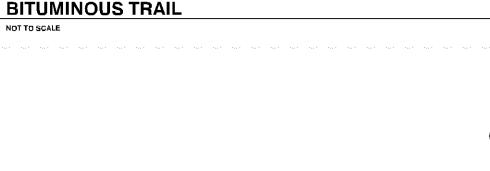

15 30

ALLIANT

ENGINEERING

733 Marquette Avenue

Suite 700

Minneapolis, MN 55402

612.758.3080

www.alliant-inc.com

SOUTH

ENT

Q

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA


DAVID NASH, PE 04-21-21 License No.


QUALITY ASSURANCE/CONTROL


DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL 06-17-20 ADDENDUM #1 07-23-20 REVIEW SET 07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA DESIGNED: DRAWN: KDB/DMS PROJECT NO: 190123

C-7.1

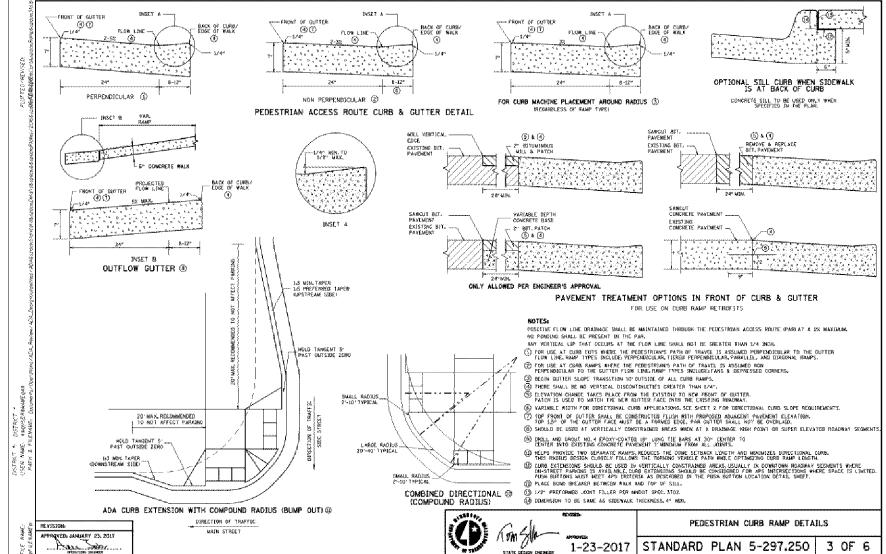

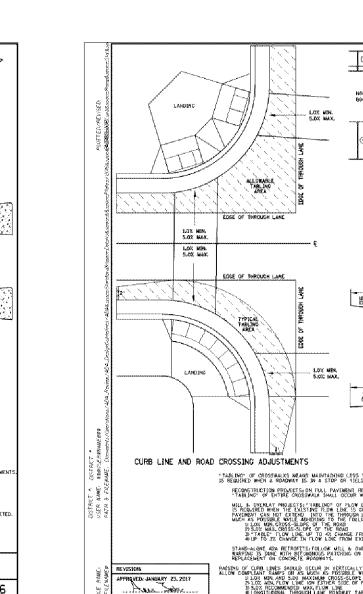

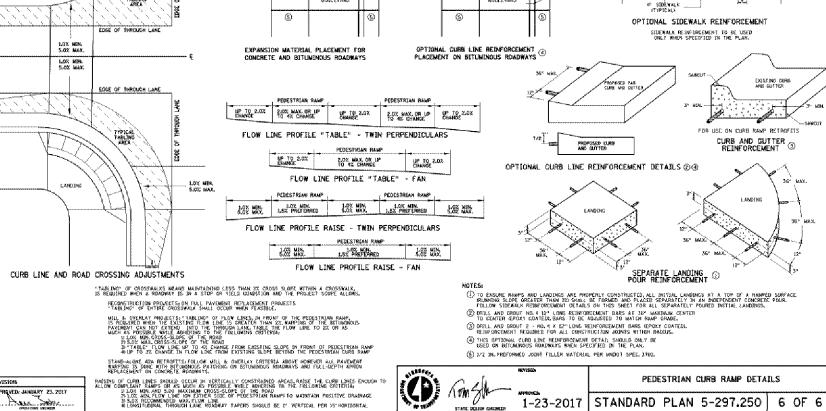

PEDESTRIAN CURB RAMP

1 MN/DOT S.P.4010 2" ADJUSTING RINGS AS NEEDED [6" MIN. TO 12" MAX.]. SET EACH RING IN FULL BED OF MORTAR. 2 MN/DOT S.P.4010 TYPE C ALTERNATE SHORT CONE SECTION.

4 USE ONLY PRECAST SECTIONS, NO BRICK OR BLOCK

5 8" CAST IN-PLACE CONCRETE OR 6" PRECAST REINFORCED CONCRETE (64" MINIMUM OD)

6 CEMENT MORTAR ALL AROUND

7 LEAN CONCRETE TO BEAR AGAINST FIRM UNDISTURBED SOIL

8 PROVIDE WATER TIGHT PIPE CONNECTIONS SEE DETAIL THIS SHEET


9 > O-RING GASKET

10 FOR CONNECTION TO EXISTING MH'S, CORE DRILL OPENING AND PROVIDE TYPE B WATER TIGHT CONNECTOR


VACUUM TEST TO BE WITNESSED BY CITY.

11 6" SAND OR FOUNDATION MATERIAL 12 UNDISTURBED SOIL OR COMPACTED SUBGRADE

400 - STANDARD SANITARY SEWER MANHOLE 400 - Std San MH.dwg 6/2015

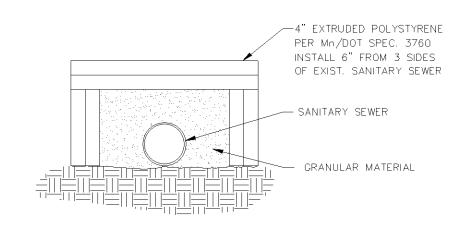


411 - SANITARY SEWER INSULATION DETAIL 411 - Std San MH.dwg 6/2015

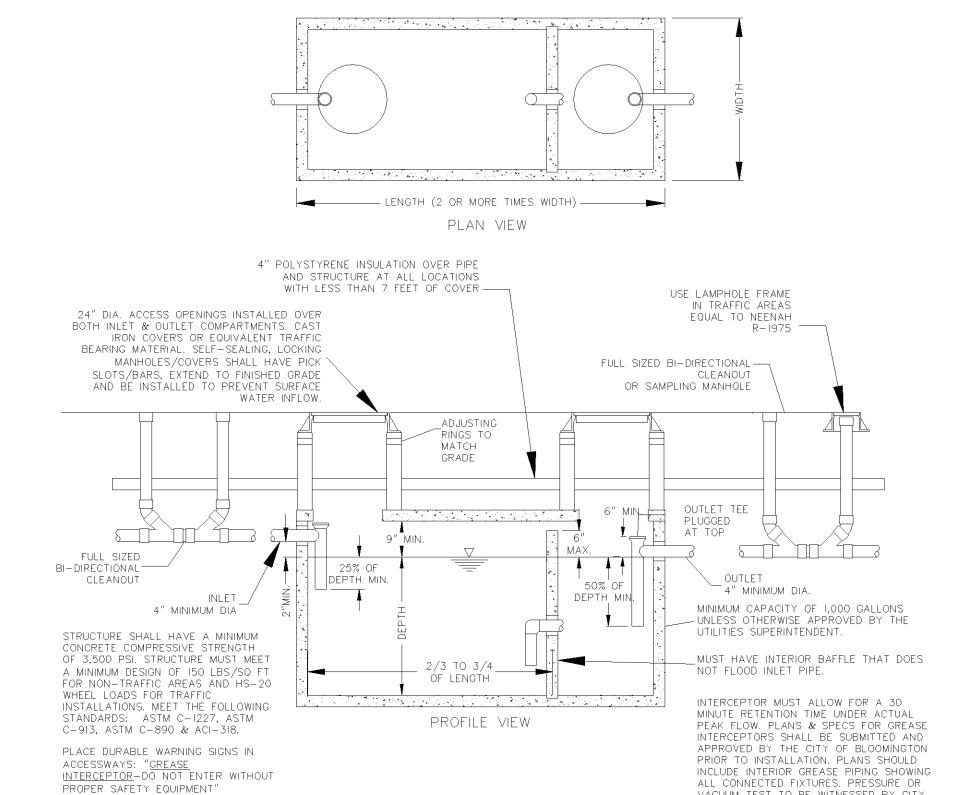


412 - GREASE INTERCEPTOR EXAMPLE

NOT TO SCALE - FOR INFORMATIONAL PURPOSES ONLY 412 - Typical Grease Interceptor.dwg 12/2019

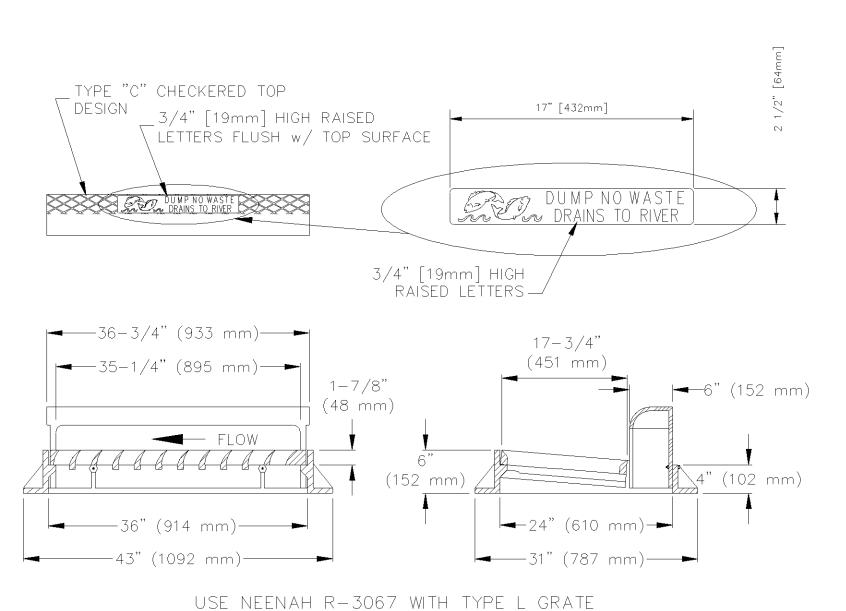




OR APPROVED EQUAL

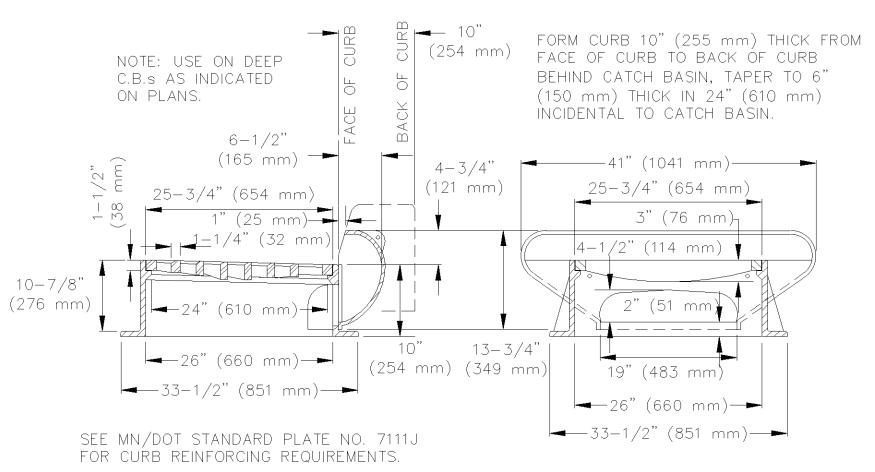


FRAME: MN/DOT STD PLATE 4126F CASTING 801 GRATE: MN/DOT STD PLATE 4149C CASTING 810 CURB BOX WITH 41" OPENING: AS SHOWN ABOVE (USE NEENAH R-3250-1 OR APPROVED EQUAL)

505 - ROUND CATCH BASIN CASTING ASSEMBLY 505 - Round CB.dwg 5/2015

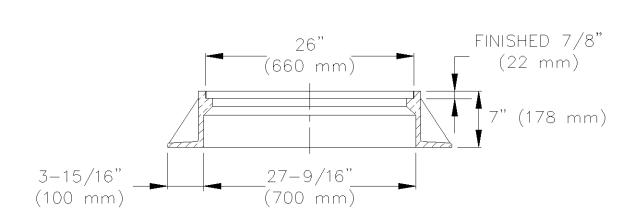


MN/DOT S.P. 4101D CASTING NO. 700-7


503 - RING CASTING FOR MANHOLE 503 - MH Frame.dwg 5/2015

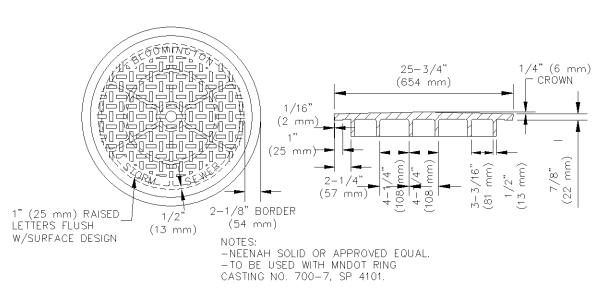

500 - STANDARD STORM SEWER MANHOLE COVER 500 - Storm Cov (Solid).dwg 5/2015

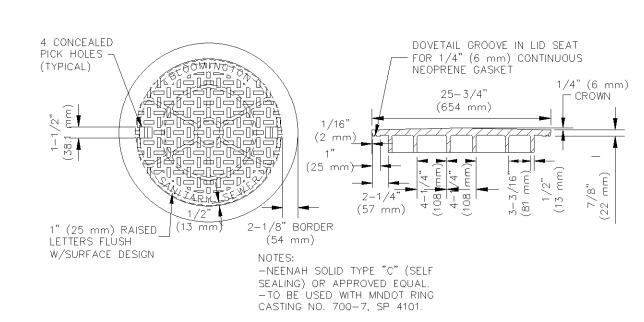

501 - STANDARD SANITARY MANHOLE COVER 501 - Sanitary Cov.dwg 5/2015

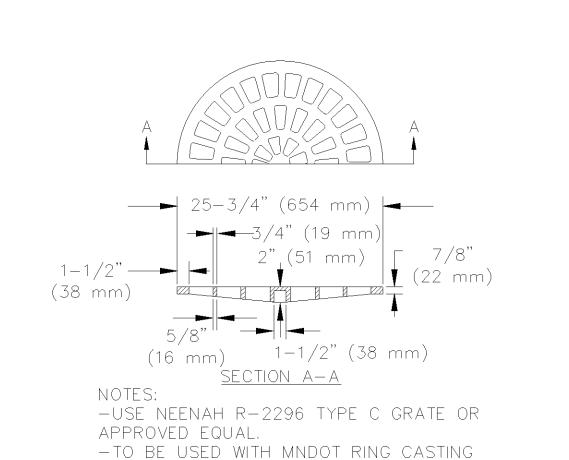

502 - RADIAL GRATE STORM MANHOLE COVER 502 - Radial Grate.dwg 4/2009

NO. 700-7, SP 4101.



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

SOUTH Σ QUARI

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of

DAVID NASH, PE 04-21-21

License No. QUALITY ASSURANCE/CONTROL


DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL 06-17-20 ADDENDUM #1 07-23-20 REVIEW SET 07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA DESIGNED: DRAWN:

KDB/DMS PROJECT NO: 190123


DMS/DJN


C-7.2

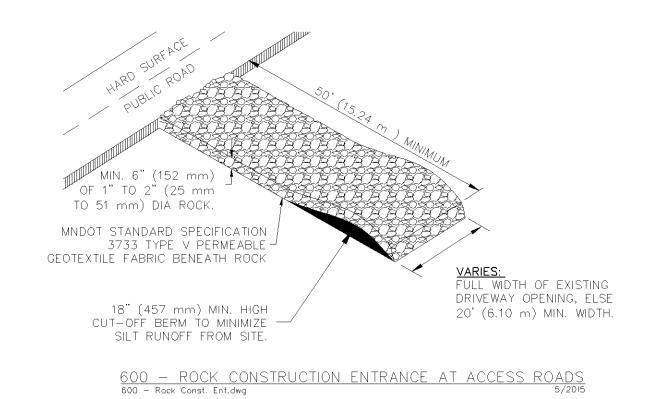

1 600 - ROCK CONSTRUCTION ENTRANCE AT ACCESS ROADS


600 - Rock Const. Ent.dwg 5/2015

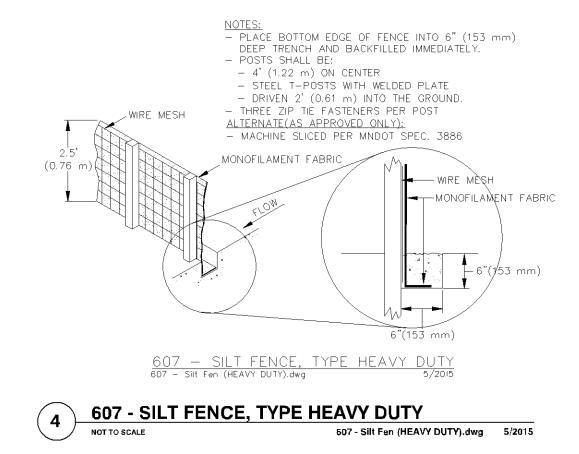

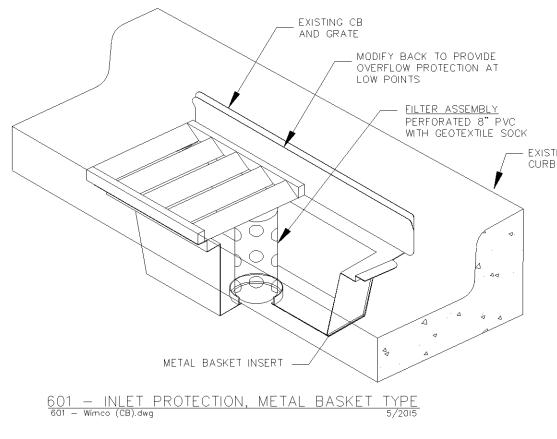


2 601 - INLET PROTECTION, METAL BASKET TYPE

NOT TO SCALE 501 - Wimco (CB).dwg 5/2015

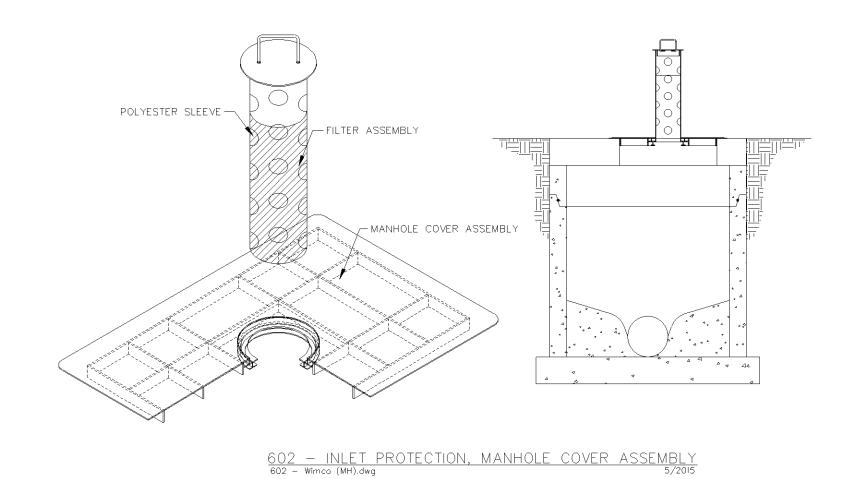

602 - INLET PROTECTION, MANHOLE COVER ASSEMBLY
NOT TO SCALE
6012 - Wimco (MH).dwg 5/2015

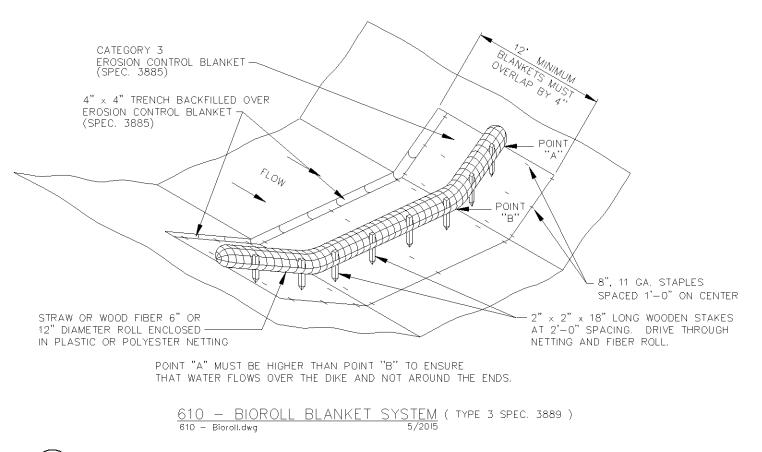

5 610 - BIOROLL BLANKET SYSTEM (TYPE 3 SPEC. 3889)
NOT TO SCALE 610 - Bioroll.dwg 5/2015



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

D E. AND 34TH AVE SOUTH

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed

am a duly Licensed
PROFESSIONAL ENGINEER under
the laws of the State of
MINNESOTA

DAVID NASH, PE

04-21-21
Date License No.

QUALITY ASSURANCE/CONTROL

DATE ISSUE

01-29-20 CITY SUBMITTAL

03-27-20 PROGRESS PLOT

05-06-20 REVISED CITY SUBMITTAL

06-17-20 ADDENDIM #1

05-06-20 REVISED CITY SUBMITTAL
06-17-20 ADDENDUM #1
07-23-20 REVIEW SET
07-30-20 CONSTRUCTION DOCUMENTS
01-29-21 100% GMP PERMIT SET
04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA

DESIGNED: DMS/DJN

DRAWN: KDB/DMS

PROJECT NO: 190123

C-7.3







733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE

04-21-21 Date

QUALITY ASSURANCE/CONTROL


DATE ISSUE 01-29-20 CITY SUBMITTAL 03-27-20 PROGRESS PLOT 05-06-20 REVISED CITY SUBMITTAL 06-17-20 ADDENDUM #1 07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA

DESIGNED: DMS/DJN KDB/DMS DRAWN: PROJECT NO: 190123

L-1.0

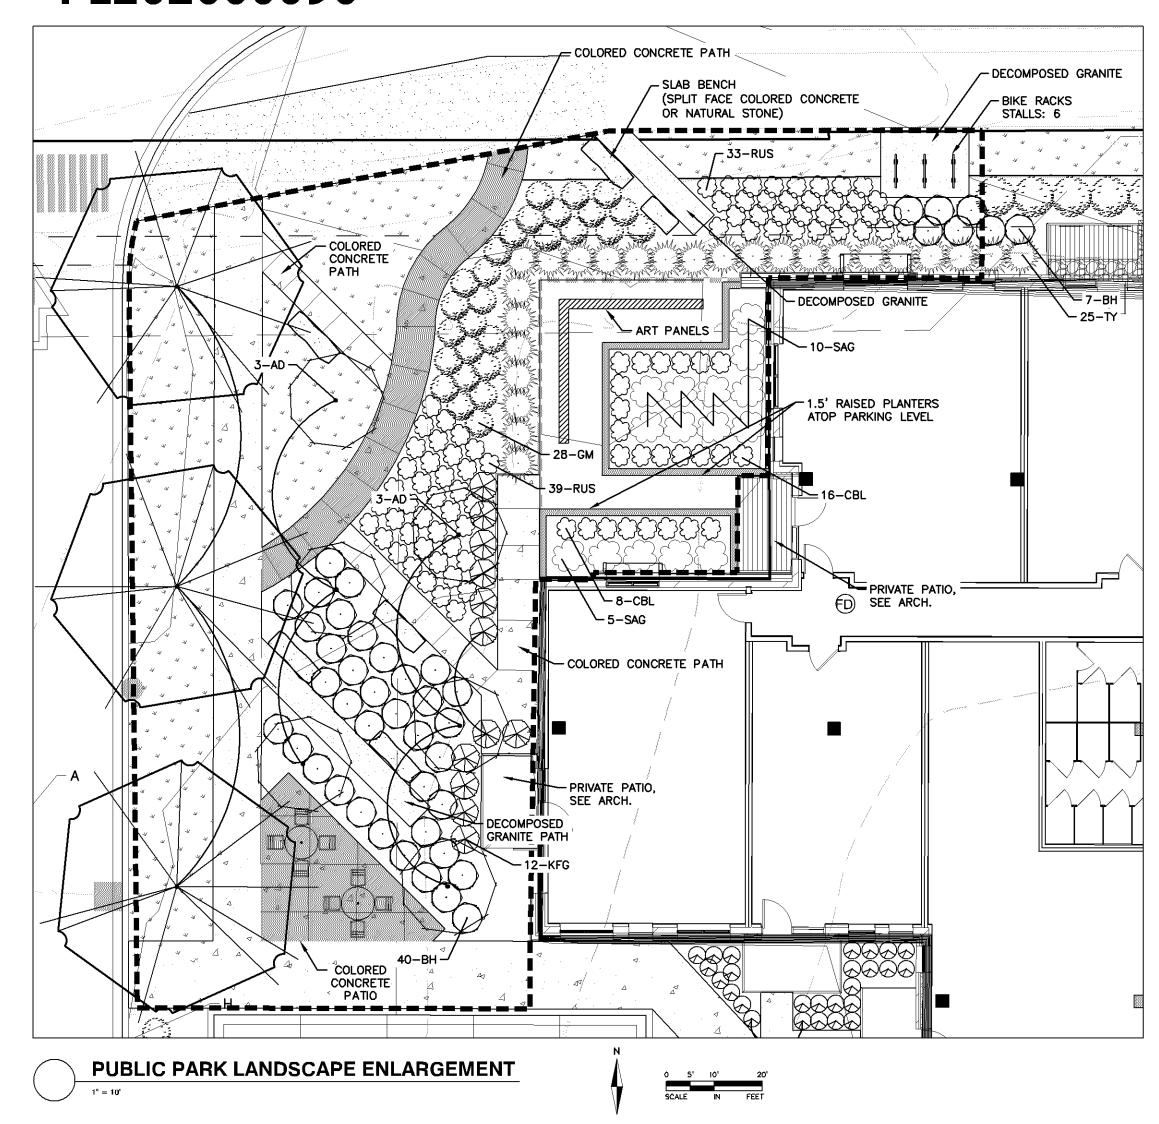


PUBLIC PARK/PLAZA REQUIREMENTS

TOTAL PLAZA AREA REQUIRED: PROVIDED:	5,000 SF 5,000 SF
ABUTTING PUBLIC WAY REQUIRED (350 LF X 25%): PROVIDED (25%):	87.5 LF 88 LF
LANDSCAPE/WATER FEATURE REQUIRED (30%): PROVIDED (60%):	1,500 SF 3,019 SF
SEATING REQUIREMENT REQUIRED (5,000/200 SF): PROVIDED (5,000/200 SF):	25 SEATS 25 SEATS


LANDSCAPE NOTES:


- . CALL GOPHER STATE ONE CALL AT 651-454-0002 FOR LOCATING ALL UNDERGROUND UTILITIES AND TO AVOID DAMAGE TO UTILITIES DURING THE COURSE OF THE WORK.
- 2. INSTALL 4" MIN. TOP SOIL TO ALL SOD AND SHRUB AREAS. FINE GRADE ALL SOD AREAS. INSTALL 12" PLANTING (TOP) SOIL TO ALL ANNUAL/PERENNIAL AREAS.
- 3. STAKE OR MARK ALL PLANT MATERIAL LOCATIONS PRIOR TO INSTALLATION. HAVE OWNERS REPRESENTATIVE APPROVE ALL STAKING PRIOR TO INSTALLATION.
- 4. ALL SHRUB AREAS UNLESS SPECIFIED AS OTHER ON THE PLAN, TO BE BED MULCHED WITH 4" DEPTH OF HARDWOOD MULCH, DARK BROWN COLOR, OVER FILTER FABRIC, POLY-EDGER TO BE VALLEY VIEW BLACK DIAMOND OR APPROVED.
- 5. ALL MULCH AND ROCK (BOULDERS, COBBLESTONE, ETC) TO BE APPROVED BY OWNER AND/OR LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- 6. INSTALL 4-6" DEPTH SHREDDED HARDWOOD MULCH AROUND ROOT SAUCER OF ALL TREES ISOLATED FROM PLANT BEDS. DO NOT PLACE LANDSCAPE FABRIC OR MULCH ONTO TREE TRUNK.
- 7. PLANTING SOIL SHALL BE 1:1:1 CONSISTING OF 33% SELECT LOAMY TOPSOIL, 33% PEAT MOSS, 33% PIT RUN SAND.
- 8. COMPLETELY GUARANTEE ALL WORK FOR A PERIOD OF ONE YEAR BEGINNING AT THE DATE OF ACCEPTANCE. MAKE ALL REPLACEMENTS PROMPTLY (AS PER DIRECTION OF OWNER).
- 9. ALL MATERIAL SHALL COMPLY WITH THE LATEST EDITION OF THE AMERICAN STANDARD FOR NURSERY STOCK, AMERICAN ASSOCIATION OF NURSERYMEN.
- 10. ALL TREE TRUNKS SHALL BE WRAPPED WITH BROWN CREPE TREE WRAP. APPLY WRAP IN NOVEMBER AND REMOVE IN APRIL.
- 11. MAINTAIN ALL PLANT MATERIALS, INCLUDING WATERING, UNTIL THE TIME OF ACCEPTANCE.
- 12. COORDINATE LANDSCAPE INSTALLATION WITH GENERAL CONTRACTOR.
- 13. STAKING AND GUYING OF TREES OPTIONAL: MAINTAIN PLUMBNESS OF TREES FOR DURATION OF WARRANTY PERIOD.
- 14. SWEEP AND WASH ALL PAVED SURFACES AND REMOVE ALL DEBRIS RESULTING FROM LANDSCAPE OPERATIONS DAILY.
- 15. SUPPLY DESIGN AND INSTALLATION FOR NEW IRRIGATION SYSTEM WITH 100% COVERAGE OF SOD AND PLANTING AREAS INCLUDING PLANTINGS ON THE POOL DECK (SEE SHEET L-2.0). USE RAINBIRD OR APPROVED EQUAL. COORDINATE INSTALLATION WITH G.C. SOD AND SHRUB AREAS TO BE ON SEPARATE ZONES. PROVIDE RAIN SENSOR.

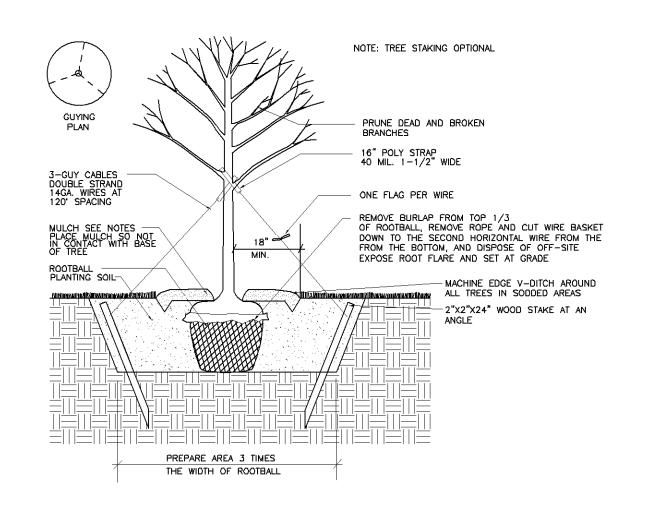

CONTRACTOR IS RESPOSIBLE TO MAINTAIN TREES IN A PLUMB POSITION THROUGHOUT THE MAINTENANCE PERIOD

TREE PLANTING

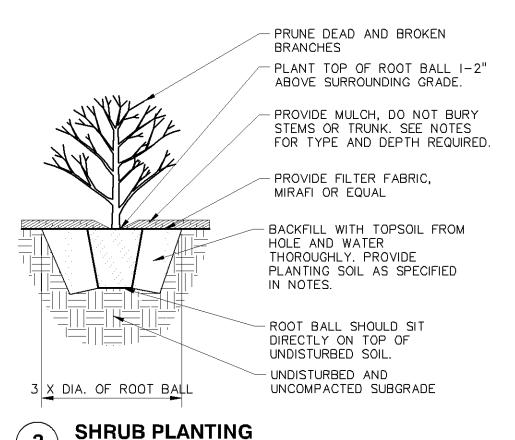

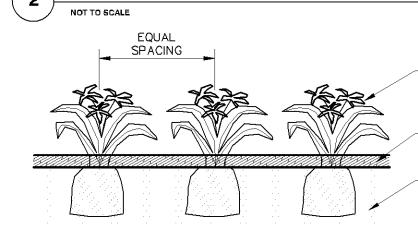

PERENNIALS (TYP.), PLANT
IN STAGGERED ROWS
UNLESS OTHERWISE SHOWN
ON PLAN


4" HARDWOOD MULCH OVER WEED
BARRIER/FILTER FABRIC

SPECIFIED


- 12" PLANTING SOIL AS

- UNDISTURBED AND UNCOMPACTED SUBGRADE

3 PERENNIAL PLANTINGS NOT TO SCALE

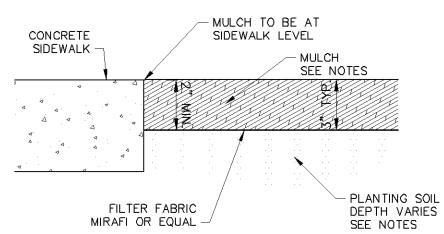

4 MULCH AT SIDEWALK DETAIL NOT TO SCALE

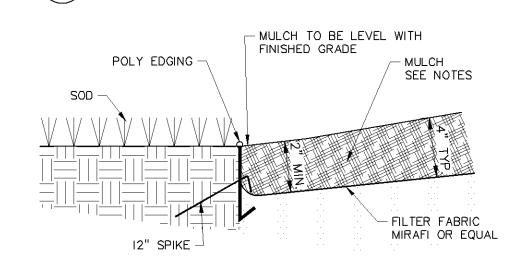



LANDSCAPE SCHEDULE

QUANTITY	KEY	COMMON NAME	SCIENTIFIC NAME	SIZE / ROOT TYPE	NOTES
OVERSTORY TR	EES		<u> </u>		I.
8	HL	Northern Acclaim Honey Locust	Gleditisia Tricanthos var. inermis 'Harve'	2.5" cal. B&B	Straight Trunk, No V-Crotch
9	NH	New Horizon Elm	Ulmus carpinifolia 'New Horizon'	2.5" cal. B&B	Straight Trunk, No V-Crotch
7	SM	Autumn Spire Maple	Acer rubrum 'Autumn Spire'	2.5" cal. B&B	Straight Trunk, No V-Crotch
5	PB	Paper Birch	Betula paperifera	10' ht. B&B	Clump Form
3	RB	River Birch	Betula nigra	12' ht. B&B	Clump Form
EVERGREEN TR	EES				
6	BS	Black Hills Spruce	Picea densata 'Black Hills'	10' ht. B&B	Clump Form
ORNAMENTAL	TREES				
6	AD	Adirondak Flowering Crab	Malus 'Adirondack'	1.5" cal. B&B	Straight Trunk, No V-Crotch
SHRUBS					
86	вн	Dwarf Bush Honeysuckle	Diervilla Ionicera	18" ht. cont.	Min. 5 canes at ht. spec.
43	GM	Goldmound Spirea	Spirea x 'Goldmound'	18" ht. cont.	Min. 5 canes at ht. spec.
9	HA	Holmstrup Arborvitae	Thuja occidentalis 'Holmstrup'	6' ht. B&B	Full Form
60	LH	Lime Light Hydrangea	Hydrangea paniculata 'Limelight'	18" ht. cont.	Min. 5 canes at ht. spec.
7	RD	Red Twig Dogwood	Cornus Alba	36" ht cont.	Min. 5 canes at ht. spec.
8	SJ	Scandia Juniper	Juniperus sabina 'Skandia'	18" ht. cont.	Min. 5 canes at ht. spec.
42	TY	Taunton Yew	Taxus x media 'Taunton'	24" ht. cont.	Full Form
PERENNIALS &	ORNAME	NTAL GRASSES			
86	CBL	Champagne Coral Bells	Heuchera 'Champagne'	1 gal cont.	
8	GRZ	Miscanthus Graziella	Miscanthus sinensis 'Graziella'	3 gal cont.	
42	LBS	Little Bluestem	Schizachyrium scoparium	1 gal cont.	
26	MFG	Miscanthus Flame	Miscanthus sinensis 'Purpurascens'	3 gal cont.	
72	RUS	Little Spire Russian Sage	Perovskia atriplicifolia 'Little Spire'	1 gal cont.	
30	SAG	Sagae Hosta	Hosta 'Sagae'	1 gal cont.	
90	WLC	Walker's Low Catmint	Nepeta x faasenii 'Walker's Low'	1 gal cont.	

LANDSCAPE REQUIREMENTS

DEVELOPABLE AREA:

TOTAL DEVELOPABLE AREA: 108,963 APPLE TREE 4TH ADD. — LOT 1 BLK 1 — OUTLOT A

LANDSCAPE CALCULATIONS: TREES REQUIRED:

SHRUBS PROVIDED:

TREES REQUIRED: 44 TREES (1/2,500 SF DEVELOPABLE)

TREES PROVIDED: 44 TREES

SHRUBS REQUIRED: 109 SHRUBS
(1/1,000 SF DEVELOPABLE)

NOTE: TREES NOT REQUIRED IN PARKING LOTS WITH 50 OR FEWER SPACES.

SEED PLANTING NOTES:

WOODLAND SEED MIX: MN STATE SEED MIX #36-711 WOODLAND EDGE CENTRAL SEEDING RATE TO BE 35.5 LBS/ACRE (PURE LIVE SEED)

APPLY SEED PER THE FOLLOWING: MULCH SEEDED AREAS WITH MODOT TYPE 3 (MCIA CERTIFIED WEED FREE) MULCH AT A RATE OF I TON PER ACRE WITHIN 48 HOURS OF SEEDING. MULCH SHOULD THEN BE DISC ANCHORED TO KEEP IT FROM BLOWING AWAY.

268 SHURBS

SEEDING SHALL BE APPLIED FROM APRIL 15 - JUNE 30 OR NOVEMBER I - FREEZE UP. IF HYDROSEEDING UTILIZE APPROXIMATELY 500 GALLONS OF WATER PER ACRE. REFER TO MN/DOT SPEC 3884 FOR PROPER INSTALLATION OF HYDRO-SEED. ALL NATIVE SEEDS USED ON THIS PROJECT SHALL BE CERTIFIED TO BE OF MINNESOTA ORIGIN BY THE MINNESOTA CROP IMPROVEMENT ASSOCIATION (MCIA). SITE TO BE PREPARED BY LOOSENING TOPSOIL TO A MINIMUM DEPTH OF 3 INCHES. THE SITE TO BE HARROWED OR RAKED FOLLOWING SEEDING, AND THEN PACKED USING A CULTI-PACKER OR EQUIVALENT. SEE MNDOT SEEDING MANUAL FOR REFERENCE.

MAINTAIN SEEDED AREAS BY WATERING, REMULCHING AND REPLANTING AS NECESSARY TO ESTABLISH A UNIFORMLY DENSE STAND OF THE SPECIFIED GRASSES UNTIL ACCEPTED. ANY AREAS FAILING TO ESTABLISH A STAND SHALL BE RESEEDED, REFERTILIZED AND REMULCHED WHENEVER 70% VEGETATIVE COVER IS NOT ACHIEVED. RESEEDING SHALL CONFORM IN ALL RESPECTS TO THESE SPECIFICATIONS. THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO THE WORK AREAS RESULTING FROM EROSION AND/OR EQUIPMENT. THE CONTRACTOR SHALL REPAIR DAMAGE, INCLUDING REGRADING, RESEEDING, ETC. AS NECESSARY, BEFORE SIGNIFICANT DAMAGE OCCURS.

REFER TO MINNESOTA STATE SEED MIX MANUAL.

SOIL PREPARATION:

- I. PRIOR TO THE INSTALLATION OF THE LANDSCAPE AND IRRIGATION SYSTEM, CONTRACTOR TO PREPARE SOIL TO ENSURE A PROPER ENVIRONMENT FOR PLANT ROOT DEVELOPMENT.
- 2. CONTRACTOR TO DE-COMPACT SOILS IN PLANTING AREAS BY ROTO-TILLING, DISKING OR RIPPING TO DEPTH OF 6-8" MINIMUM AND PREFERABLE A DEPTH OF 12-18". DE-COMPACTION OF SMALL PLANTER AREAS, SUCH AS THOSE IN PARKING LOT AREAS, MAY REQUIRE THE REMOVAL OF THE COMPACTED SOIL TO A DEPTH OF 18" OR MORE AND THEN RE-INSTALLED LOOSELY WITH REQUIRED AMENDMENTS. ALWAYS REMOVE DEBRIS OVER 2" IN SIZE FROM THE SOIL.
- 3. WHEN PERFORMING SOIL DE-COMPACTION, MULTIPLE PASSES ACROSS THE AREA WILL BE REQUIRED AND, WHEN POSSIBLE, SHOULD BE AT VARYING ANGLES TO ENSURE ADEQUATE COVERAGE. WHEN USING DISC OR RIPPING EQUIPMENT, IT IS REQUIRED THAT THE FINAL PASSES OVER THE AREA BE MADE WITH A ROTO-TILLER TO BREAK UP ANY LARGE CLUMPS TO MAKE FINAL GRADING EASIER.
- 4. AFTER INITIAL SOIL DE-COMPACTION PROCEDURES ARE PERFORMED, SOIL AMENDMENTS SHOULD BE ADDED. THE ADDITION OF SOIL AMENDMENTS IS DETERMINED FROM SOIL TESTS CONDUCTED PRIOR TO WORK COMMENCING. SOIL AMENDMENT MAY INCLUDE INORGANIC MATERIAL SUCH AS SAND, SILT OR CLAY, WHICH HELP IMPROVE SOIL TEXTURE. ORGANIC MATERIAL SUCH AS COMPOST, MANURE, AND PEAT MOSS MAY ALSO BE USED AND HELP IMPROVE SOIL STRUCTURE. OTHER AMENDMENTS SUCH AS FERTILIZER IMPROVE NUTRIENT CONTENT AND SULFUR ADJUSTS THE SOIL PH LEVEL. SULFUR SHALL BE INCORPORATED AT THE RATE OF ONE POUND OF SULFUR PER 100 SQUARE FEET.
- 5. ALL AMENDMENTS SHOULD BE MIXED THOROUGHLY WITH EXISTING SOIL AND AN ADDITIONAL SOIL TEST WILL BE TAKEN TO ENSURE PROPER SOIL CONDITIONS PRIOR TO PLANTING.



733 Marquette Avenue Suite 700 Minneapolis, MN 55402 612.758.3080 www.alliant-inc.com

AMERICAN SQUARE APARTMEN
BLOOMINGTON, MN

O

NDS(

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA

DAVID NASH, PE

04-21-21

Date License No.

QUALITY ASSURANCE/CONTROL

DATE

DATE

ISSUE

01-29-20 CITY SUBMITTAL

03-27-20 PROGRESS PLOT

05-06-20 REVISED CITY SUBMITTAL

06-17-20 ADDENDUM #1

07-23-20 REVIEW SET

07-30-20 CONSTRUCTION DOCUMENTS 01-29-21 100% GMP PERMIT SET 04-21-21 100% GMP / PERMIT SET

PROJECT TEAM DATA

DESIGNED: DMS/DJN
DRAWN: KDB/DMS
PROJECT NO: 190123

L-2.0