

**4001 West 120nd Street
Bloomington, MN 55437**

**1350 West 106th Street
Bloomington, MN 55431**

**VOLD ARCHITECTS
AND ENGINEERS**
32 Minnesota Street, Suite W2000
Saint Paul, MN 55101

woldae.com | 651.227.7773

ANDERSON - JOHNSON
ASSOCIATES,
INC.

LANDSCAPE ARCHITECTURE • SITE PLANNING • CIVIL ENGINEERING
255 AGONIST STREET • SUITE 100 • MONROVIA, MD 21206
P(410) 344-0333 • F(410) 344-7172

SITE PLAN

REMOVAL NOTES:

1. REFER TO SHEET C-21.2, GRADING, DRAINAGE AND EROSION CONTROL PLAN, FOR GENERAL NOTES.
2. MINIMIZE DISTURBANCE TO SITE AND PROTECT EXISTING VEGETATION AND SITE FEATURES (CURBS, WALKS, PAVEMENTS, OVERHEAD AND UNDERGROUND UTILITIES, SIGNAGE, FENCING, ROADWAYS, ETC.) WHICH ARE TO REMAIN.
3. REPAIR OR REPLACE EXISTING PROPERTY AND SITE FEATURES, INCLUDING GRASS AND VEGETATION, WHICH IS TO REMAIN THAT IS DAMAGED BY THE WORK, TO OWNER'S SATISFACTION AND AT NO ADDITIONAL COST TO THE OWNER.
4. VISIT THE SITE PRIOR TO BIDDING; BE FAMILIAR WITH ACTUAL CONDITIONS IN THE FIELD. EXTRA COMPENSATION WILL NOT BE ALLOWED FOR CONDITIONS WHICH COULD HAVE BEEN ANTICIPATED OR DETERMINED BY EXAMINATION OF THE SITE. THE CONTRACT DRAWS FROM THE INFORMATION AVAILABLE PERTAINING TO EXISTING SOLS, UTILITIES AND OTHER SITE CHARACTERISTICS.
5. THE CONTRACTOR SHALL HIRE THE SERVICES OF A UTILITY LOCATOR COMPANY TO LOCATE ALL PRIVATELY OWNED UTILITIES THAT MAY BE DISTURBED BY CONSTRUCTION OPERATIONS.

SITE PLAN NOTES:

1. REFER TO SHEET C1.21, GRADING, DRAINAGE AND EROSION CONTROL PLAN, FOR GENERAL NOTES.
2. ALL APPLICABLE DIMENSIONS ARE TO EDGE OF PAVEMENT UNLESS OTHERWISE NOTED.
3. CHECK ALL PLAN AND DETAIL DIMENSIONS AND VERIFY SAME BEFORE FIELD LAYOUT.
4. ALL DISTURBED AREAS OUTSIDE THE BUILDING PAD WHICH ARE NOT DESIGNATED TO BE PAVED SHALL RECEIVE AT LEAST 5" OF TPOISL AND SHALL BE SOODED.
5. WHERE NEW SOD MEETS EXISTING TURF, EXISTING TURF EDGE SHALL BE CUT TO ALLOW FOR A CONSISTENT, UNIFORM STRAIGHT EDGE. JAGGED OR UNEVEN EDGES WILL NOT BE ACCEPTABLE. REMOVE TPOISL AT JOINT BETWEEN EXISTING AND NEW AS REQUIRED TO ALLOW NEW SOD SURFACE TO BE FLUSH WITH EXISTING.
6. FAILURE OF TURF DEVELOPMENT: IN THE EVENT THE CONTRACTOR FAILS TO PROVIDE AN ACCEPTABLE TURF, THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE COST OF ANY ADDITIONAL COST TO THE OWNER, TO THE SATISFACTION OF THE ENGINEER.

LEGEND

- REFERENCE KEY TO SITE DETAILS

DETAIL I.D NUMBER (TOP)

DETAIL SHEET NUMBER (BOTTOM)

PROPOSED CONCRETE WALK

PROPOSED SHRUB

PROPOSED SHRUB BED

PROPOSED BUILDING STOOP - REFER TO ARCHITECTURAL PLANS

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed

Professional Engineer

15. **Answer: D** The patient is exhibiting signs of a stroke. The patient is unable to move the right arm and leg, and is unable to speak. The patient is also having a seizure. The patient is also having a seizure. The patient is also having a seizure.

2018


Registration Number 40180 Date 12/20/2017

Revisions		
Description	Date	Num

Comme 172029

Date: 12/20/Drawn JCL

Check: DAR



REMOVALS PLAN AND SITE PLAN

Scale 1" = 20'

Cl.II

MN

RCP GENERAL NOTES


- FOR WALLS THAT PENETRATE CEILINGSS SEE WALL TYPES SHOWN ON THE FLOOR PLAN.
- SPRINKLER HEADS ARE NOT SHOWN. LOCATE ALL SPRINKLER HEADS IN THE CENTER OF CEILING TILES.
- FOR DIFFUSER AND RETURN GRILL SIZES, SEE MECHANICAL PLANS.
- FOR LIGHT FIXTURE TYPES, SEE ELECTRICAL LIGHTING PLANS.
- CEILINGSS HEIGHTS INDICATED ON PLAN (E.G. 9'-0") ARE FROM FINISHED FLOOR OR LEVEL OF PLAN SHOWN OR INDICATED AS 10'-0".
- ACOUSTICAL TILE CEILING GRID IS TO BE CENTERED IN RECTANGULAR ROOM OR CENTERED BETWEEN LONGEST WALLS OF IRREGULARLY SHAPED ROOMS UNLESS OTHERWISE NOTED.
- VERIFY GYP. BD. CONTROL JOINT LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION.

RCP LEGEND


- CANLIGHT
- 1 X 4 LIGHT FIXTURE
- 4' STRIP LIGHT FIXTURE
- 8' STRIP LIGHT FIXTURE
- 2 X 2 LIGHT FIXTURE (IN CEILING GRID)
- 2 X 4 LIGHT FIXTURE (IN CEILING GRID)
- CEILING MOUNTED LIGHT FIXTURE
- SPEAKER
- AIR DIFFUSER (IN CEILING GRID)
- RETURN AIR GRILLE (IN CEILING GRID)
- AIR DIFFUSER
- EXHAUST GRILLE
- ACCESS PANEL
- LINEAR DIFFUSER (IN CEILING GRID)
- PTD GYPSUM BOARD CEILING / SOFFIT
- PENDANT LIGHT FIXTURE

RCP KEY NOTES:


- MODIFY EXISTING GRID TO ACCOMMODATE NEW GYP SOFFIT.
- EXTEND EXISTING GRID INTO NEW ALCOVE.
- PAINTE NEW SOFFIT PT 6E.
- PATCH GRID/ PROVIDE NEW TILE TO MATCH EXISTING AT REMOVED LIGHT FIXTURE.
- GYP BD SOFFIT WALL
- PAINTE SOFFIT PT 6F.

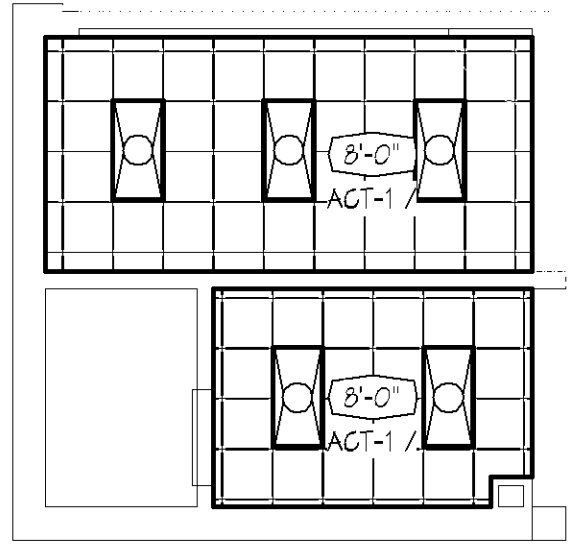


B2 MAIN LEVEL RCP - AREA 'C'
1/8" = 1'-0"

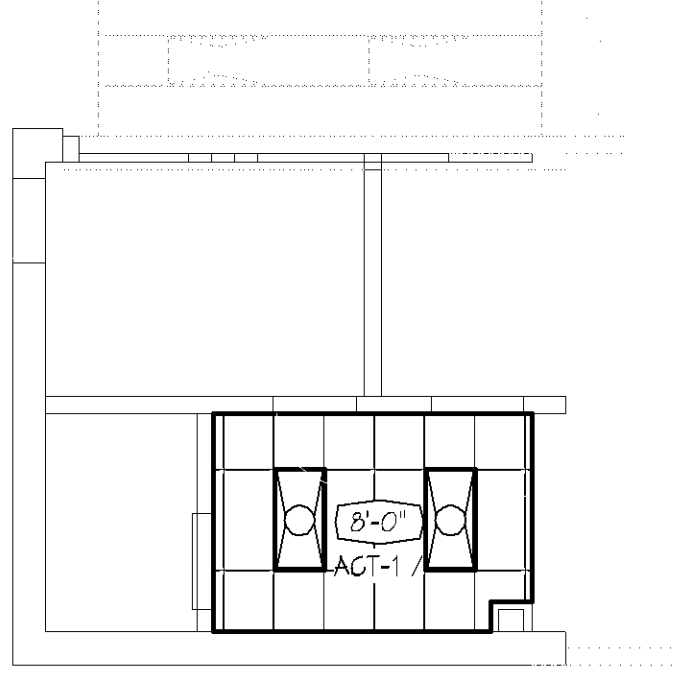


C2 LOWER LEVEL RCP - AREA 'C'
1/8" = 1'-0"

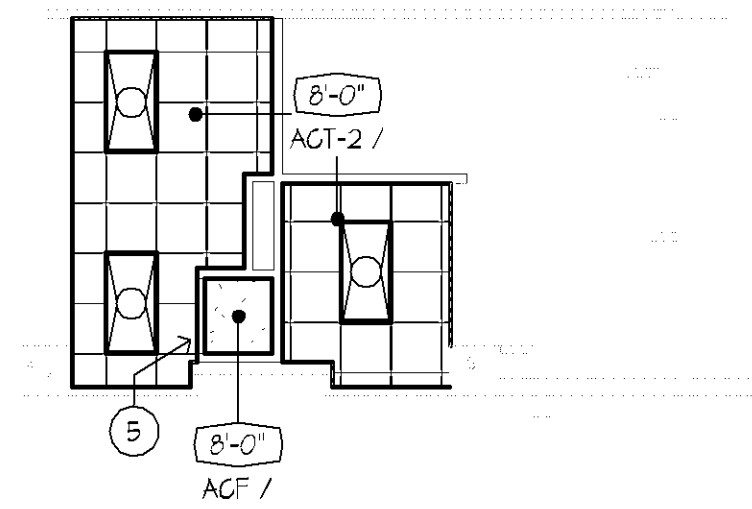


D2 LOWER LEVEL RCP - AREA 'D'
1/8" = 1'-0"

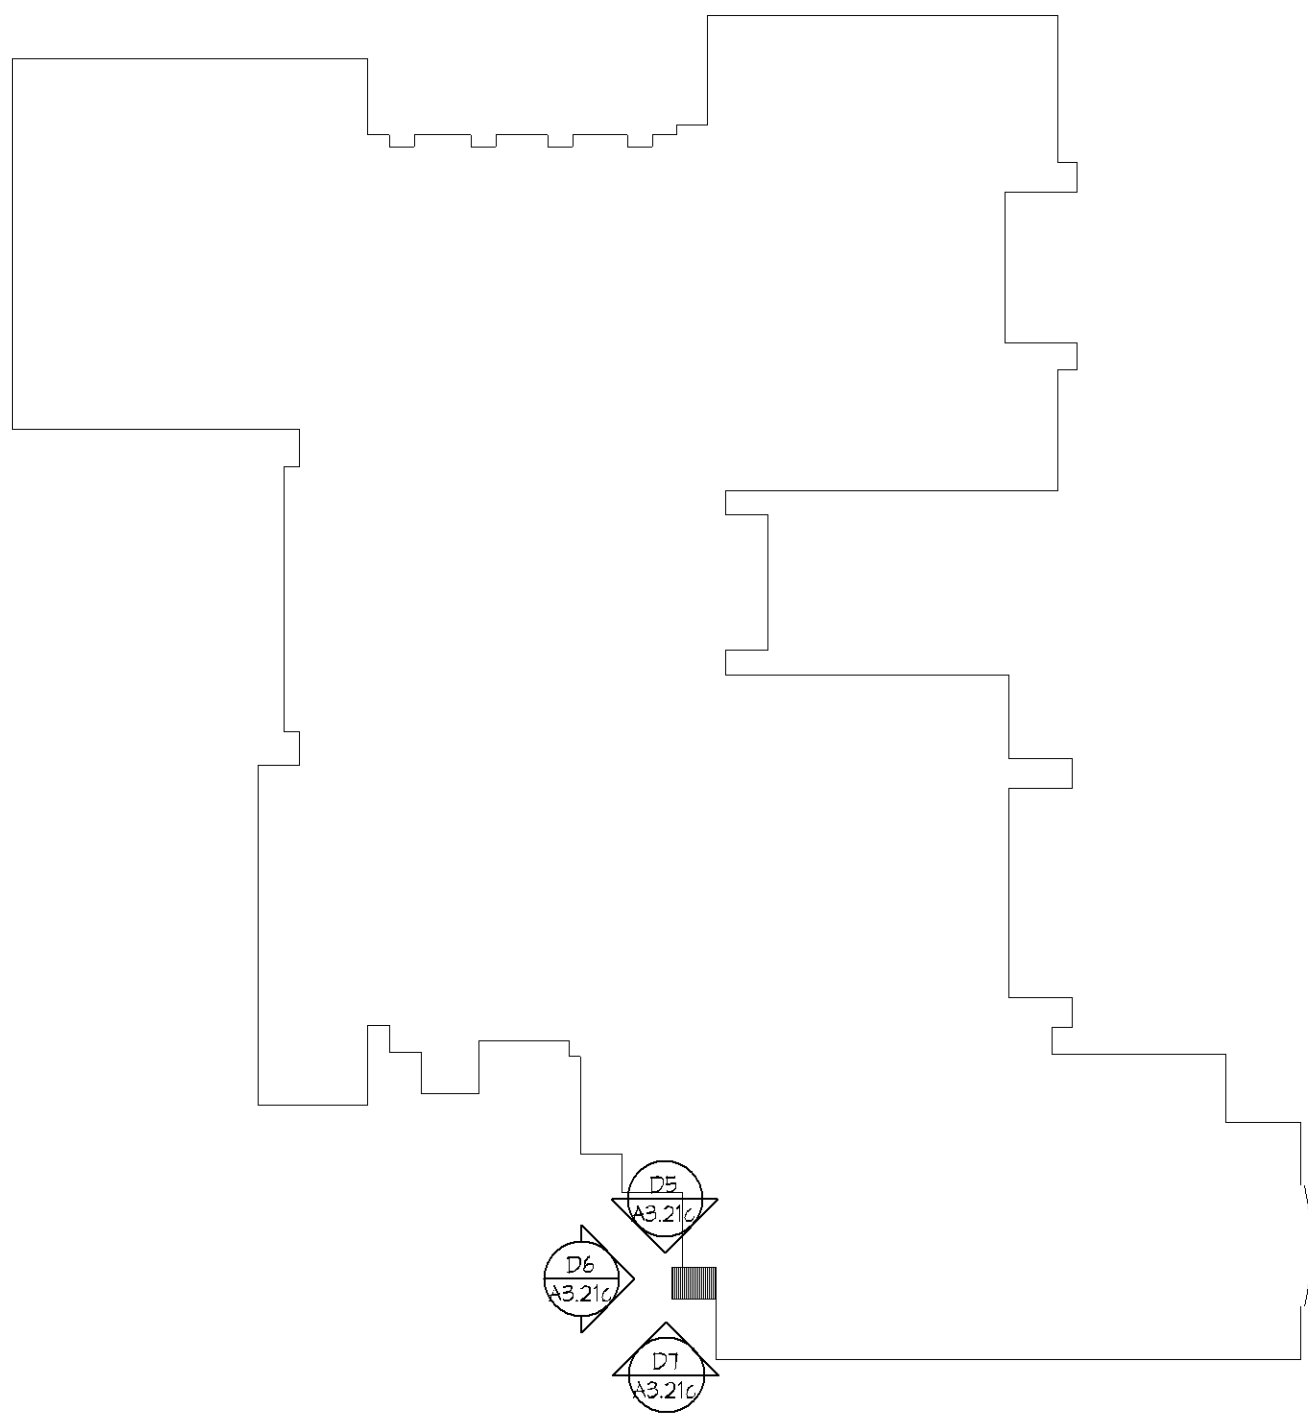


E7 EXT ELEV KEY PLAN
1 1/2" = 1'-0"

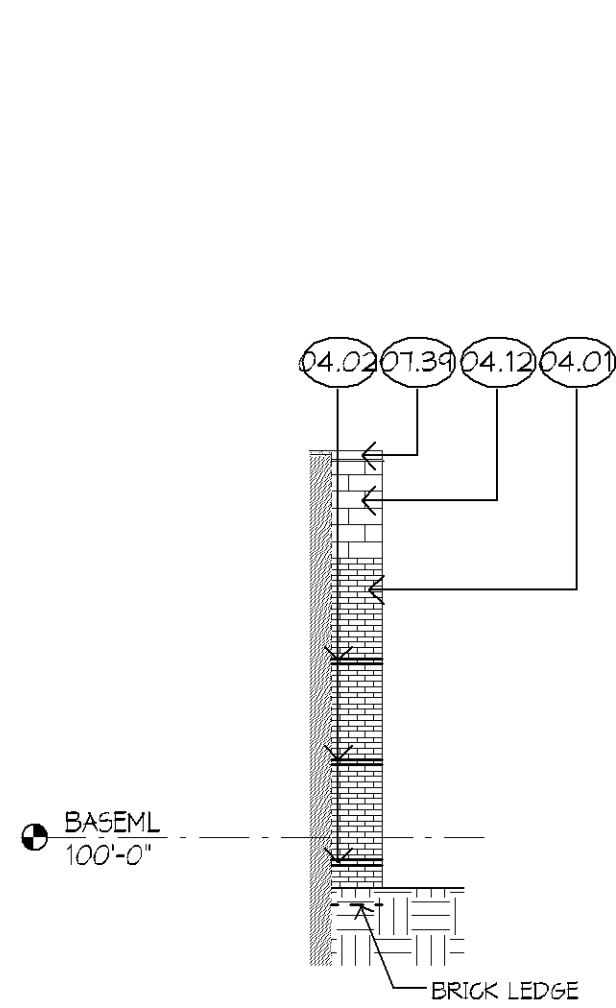

D3 NORTH ELEVATION @ AREA C
1/8" = 1'-0"

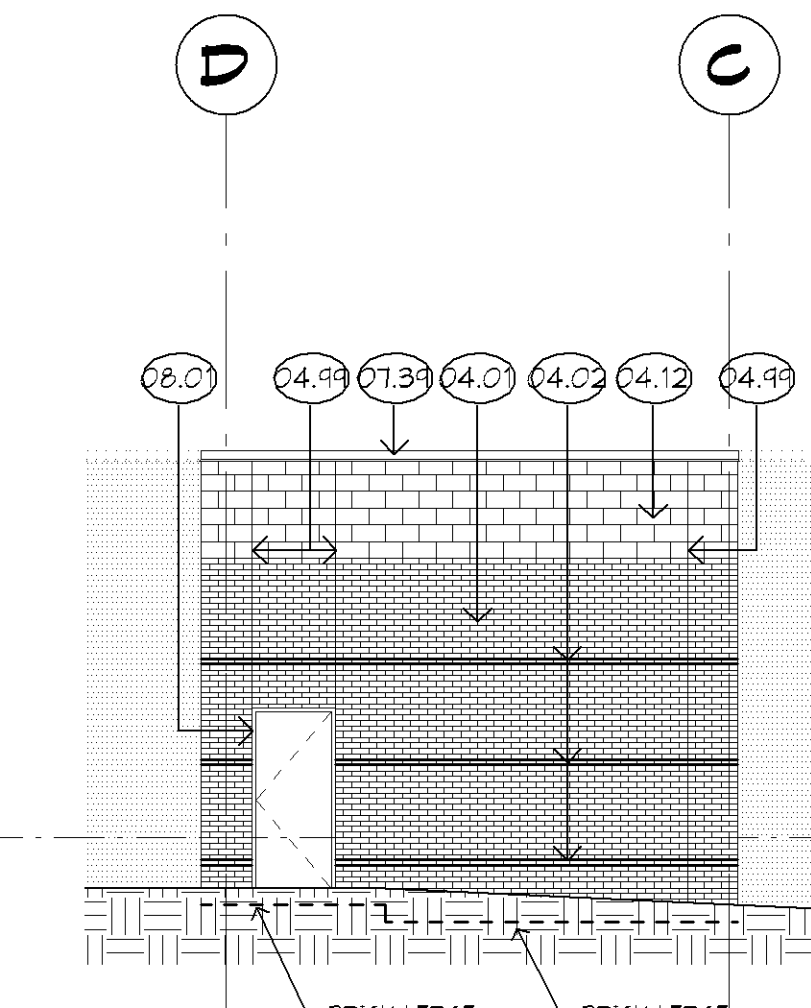

D6 WEST ELEVATION @ AREA C
1/8" = 1'-0"

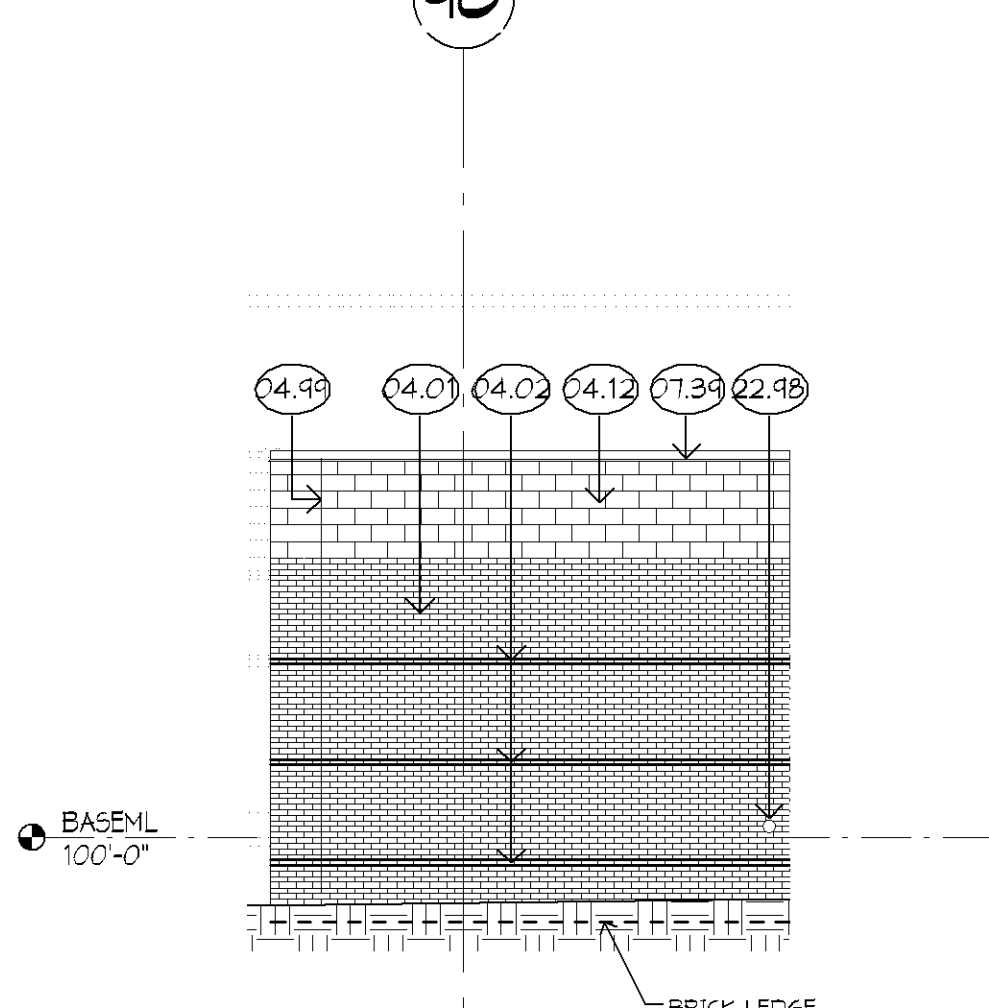

D7 SOUTH ELEVATION @ AREA C
1/8" = 1'-0"

Jefferson High School Renovations

4001 West 120nd Street
Bloomington, MN 55437


Independent School District #271

1350 West 106th Street
Bloomington, MN 55431

Wold


WOLD ARCHITECTS
AND ENGINEERS
332 Minnesota Street, Suite W3000
Saint Paul, MN 55101

woldae.com | 651.227.7773



KRAUS-ANDERSON
Construction Company

MATERIALS KEY	
KEY	MATERIAL
04.01	BRICK 1
04.02	BRICK 2
04.12	SPLIT FACE BLOCK
04.91	BRICK EXPANSION JOINT
07.31	PREFINISHED METAL COPING
08.01	HOLLOW METAL FRAME 4 DOOR
22.45	ROOF DRAIN DOWNSPOUT (SEE MEGJ)

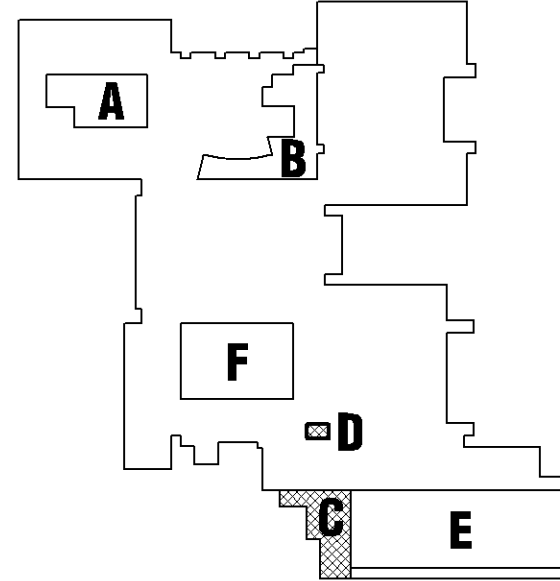

KEY PLAN

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed ARCHITECT

under the laws of the State of Minnesota

Paul Applikowski
License Number: 42737 Date: 12/20/2017


Revisions		
Description	Date	Num

Comm: 172059

Date: 12/20/17

Drawn: PT

Check: EBL





AREAS 'C' AND 'D' REFLECTED CEILING PLANS AND EXTERIOR ELEVATIONS

Scale: As indicated

A3.21c



MN

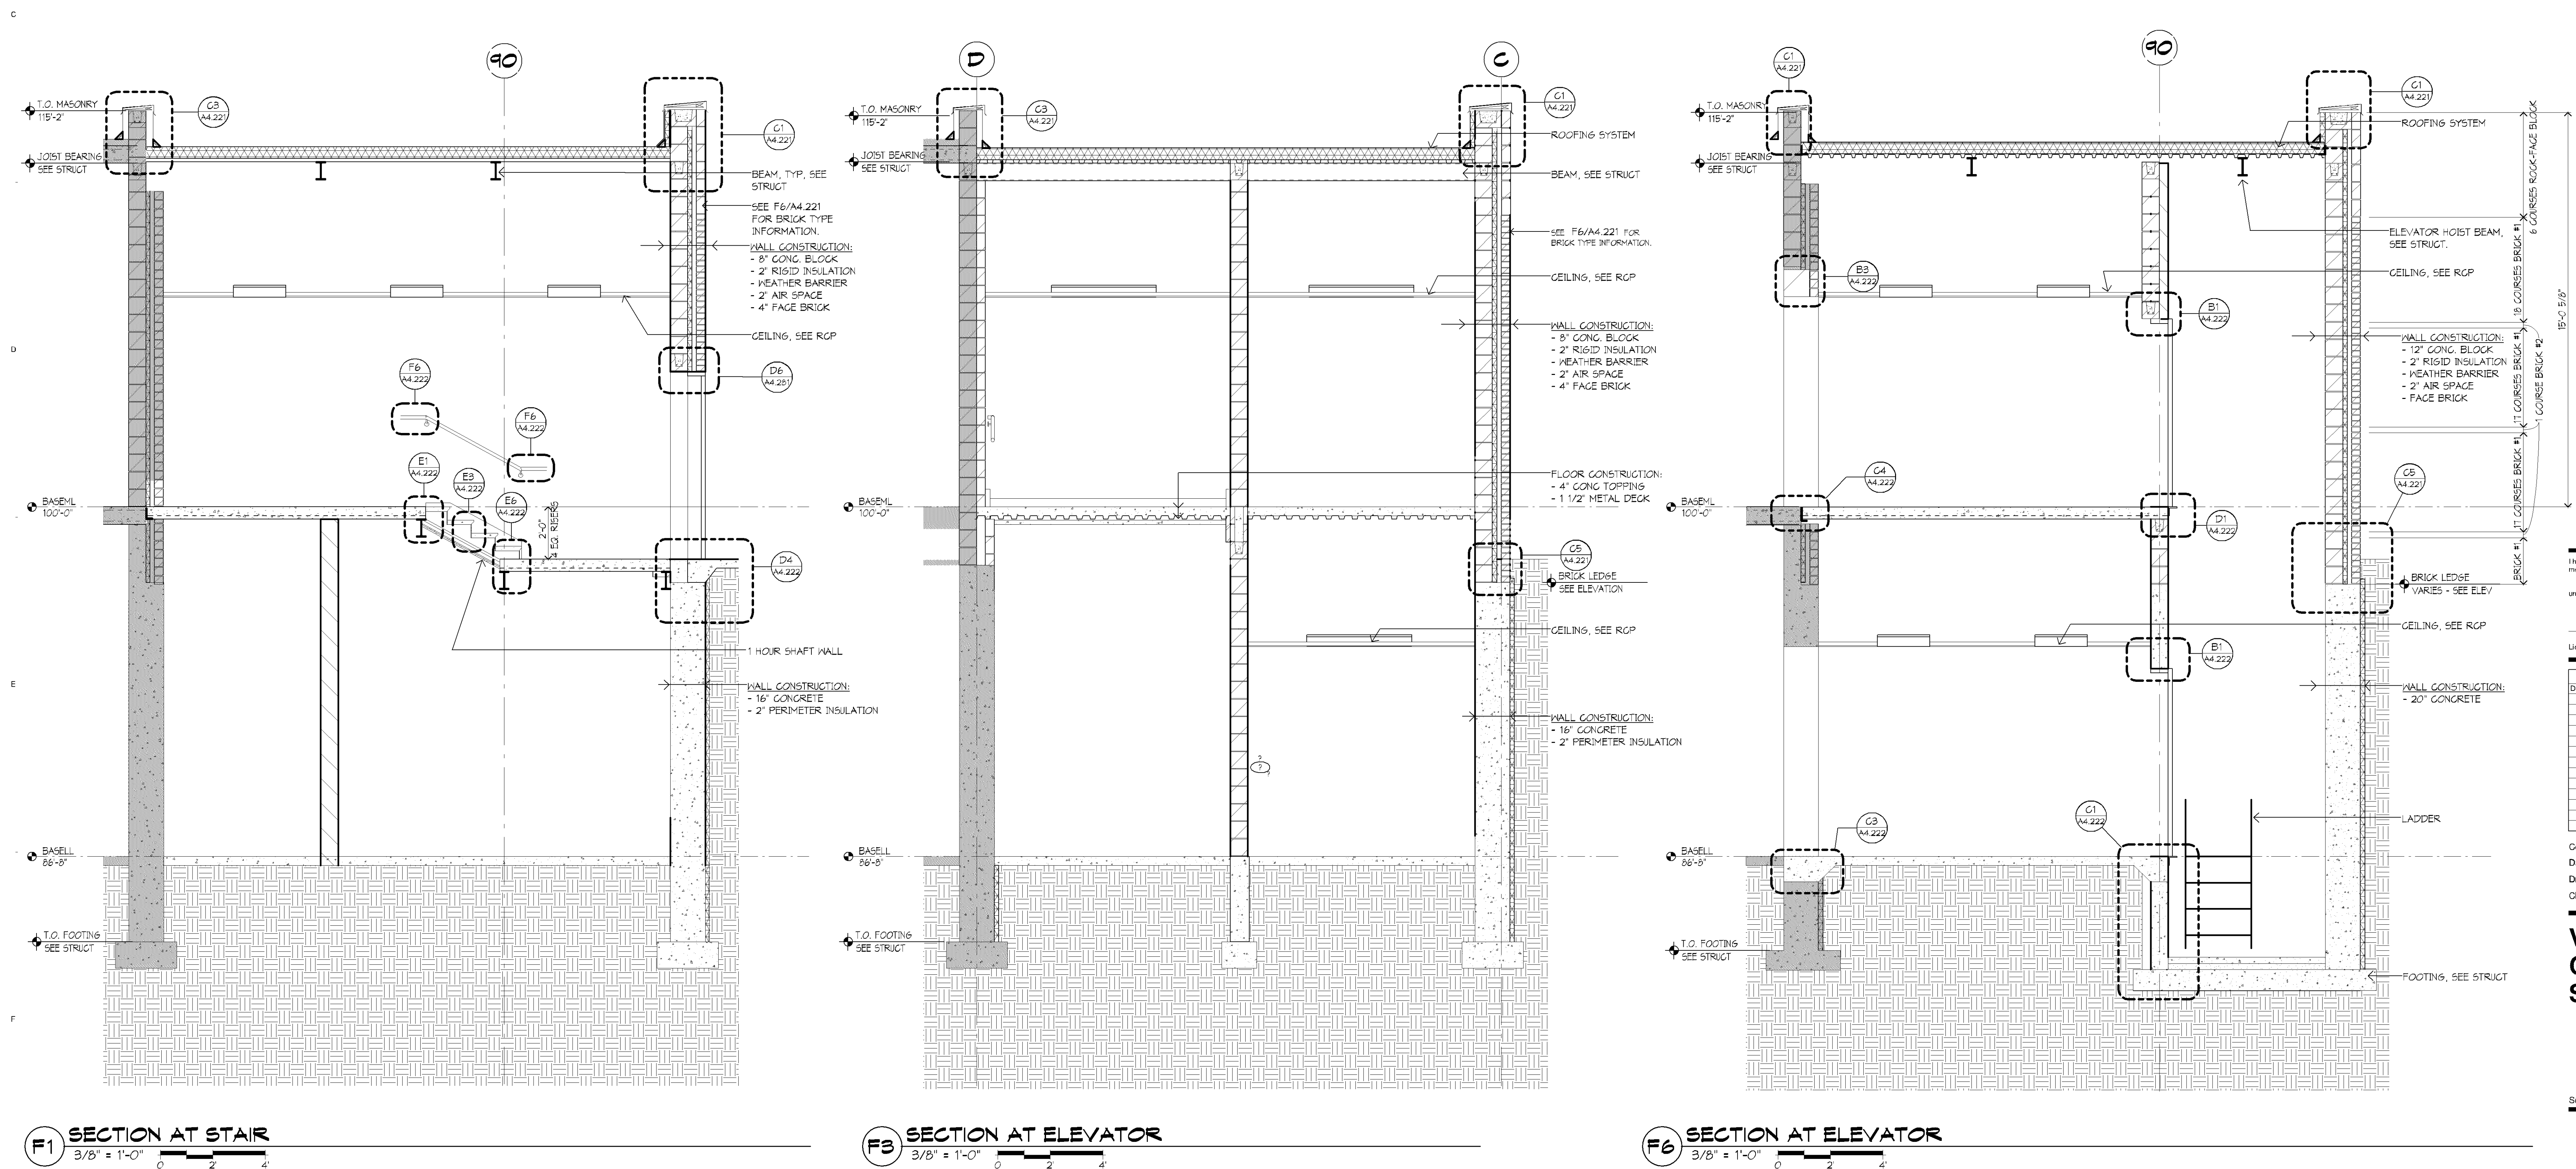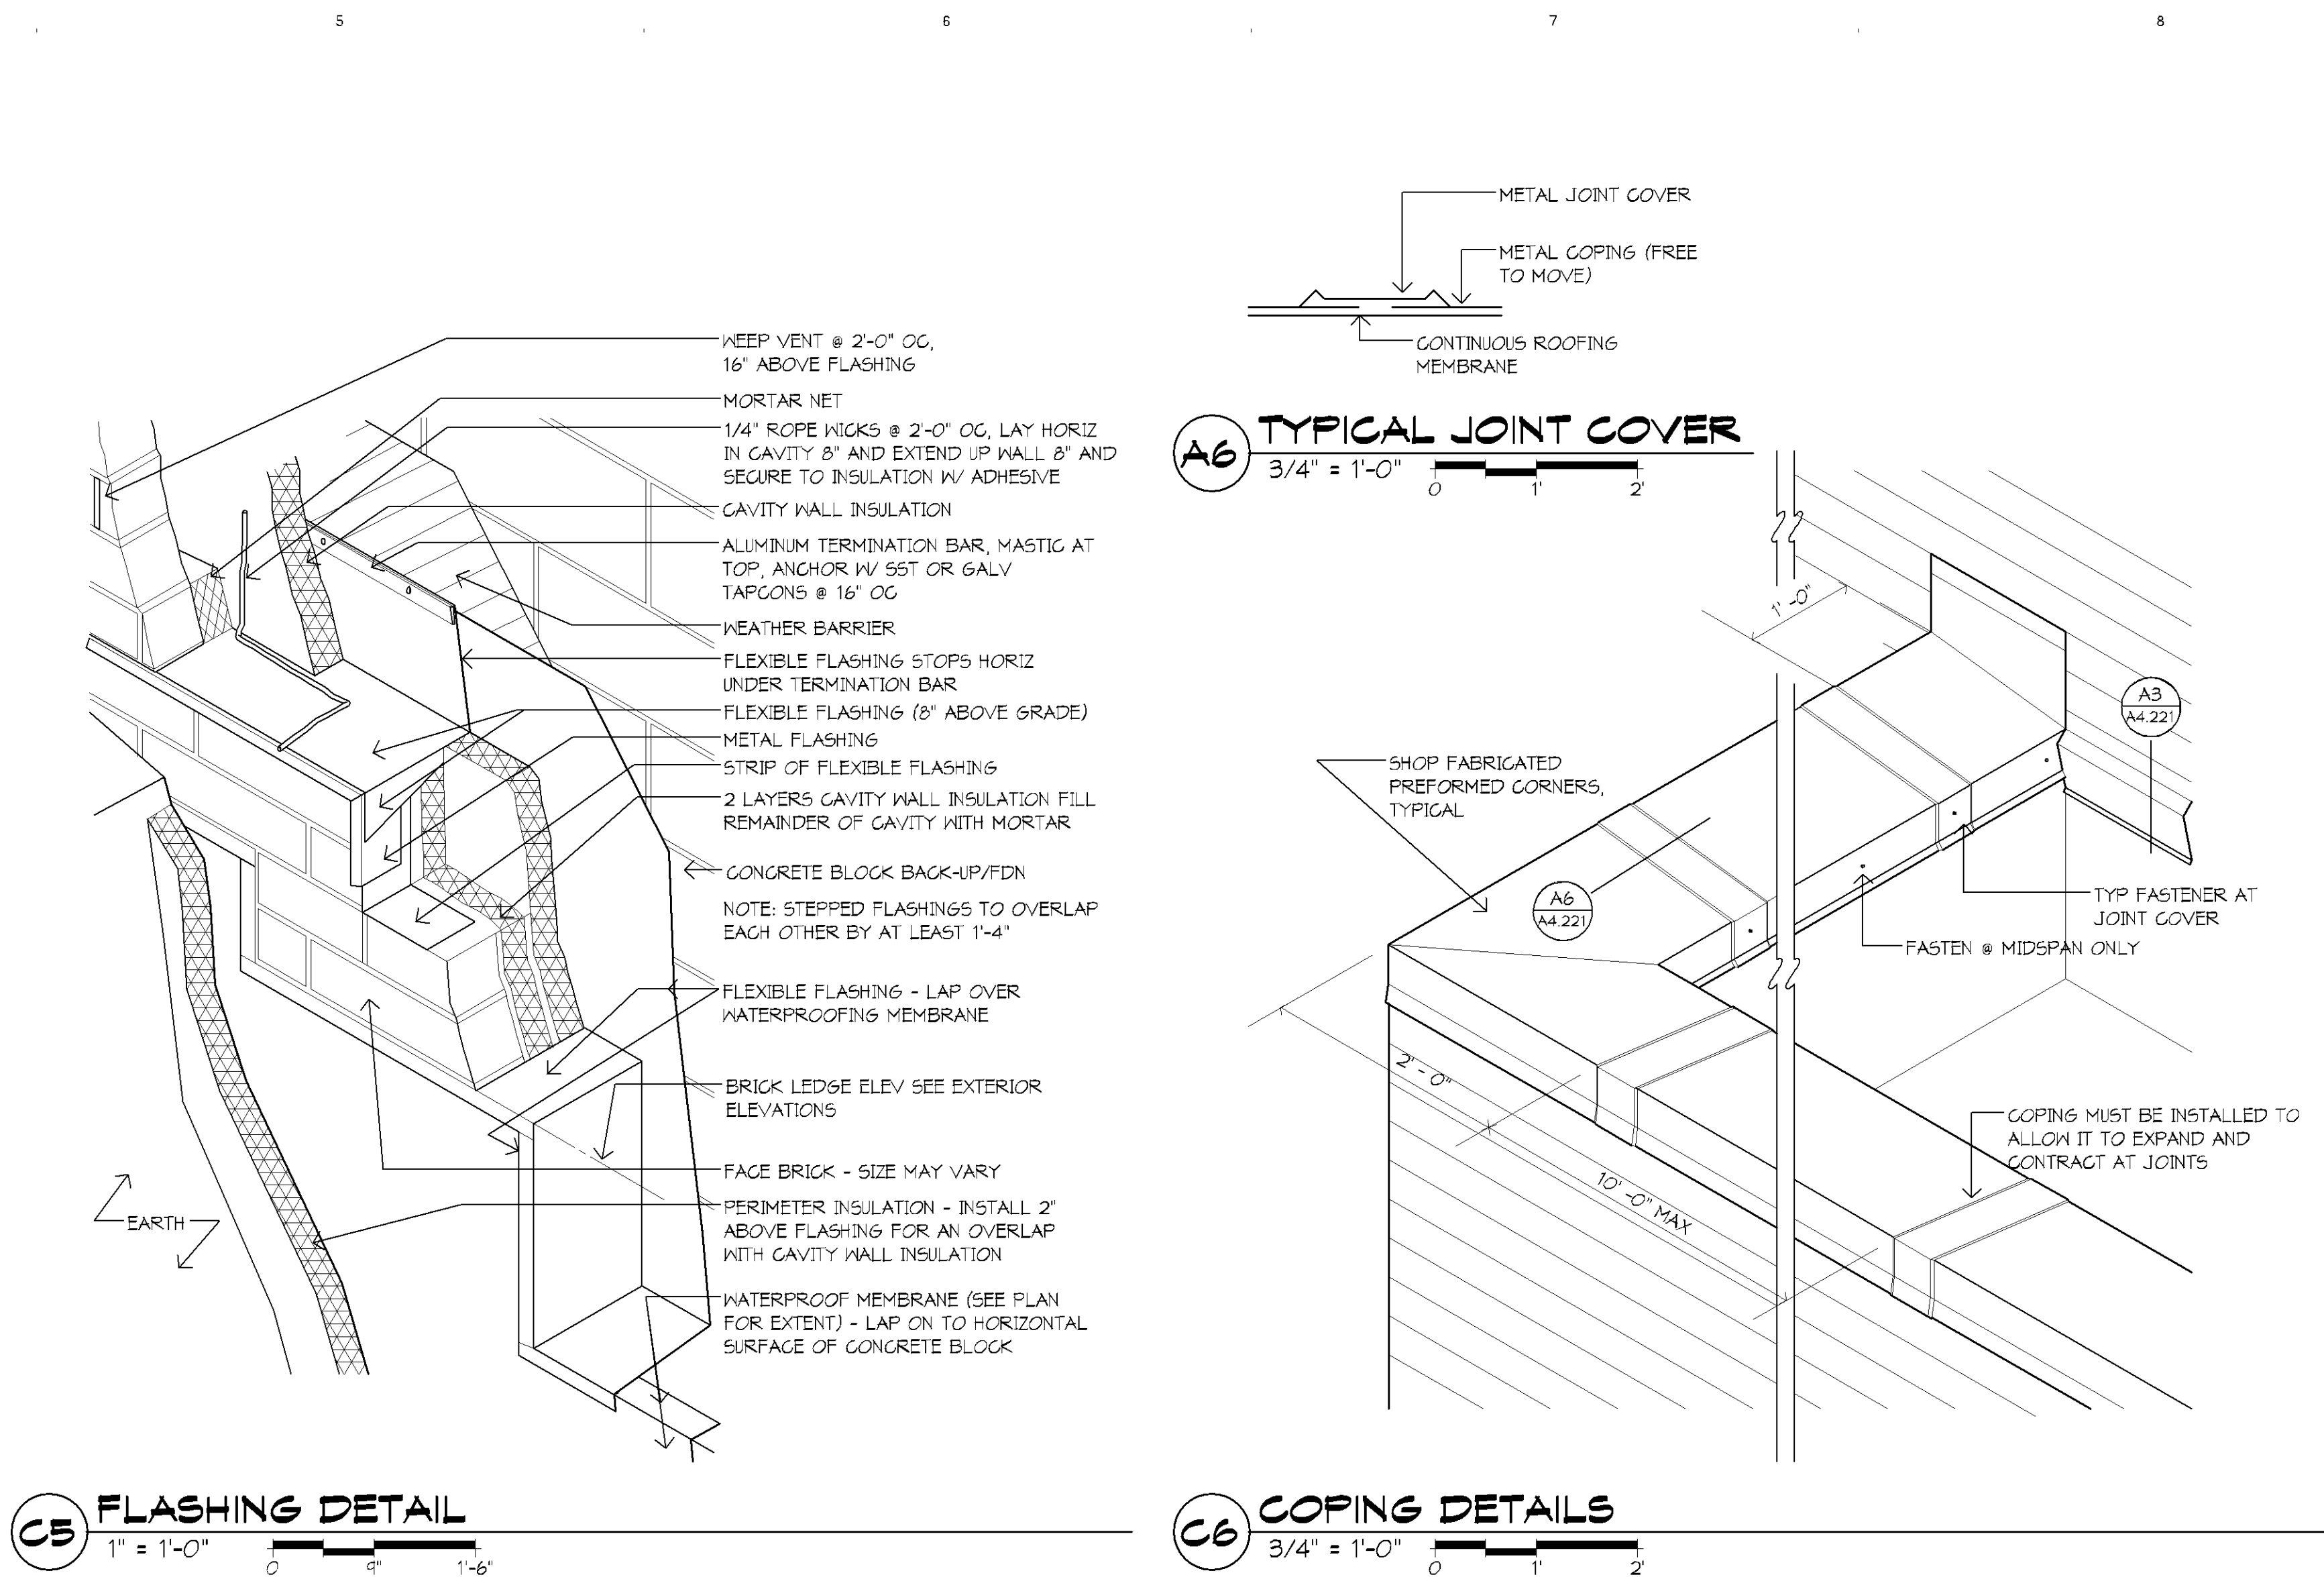

under the laws of the State of **Minnesota**

Paul Applikowski
 License Number: **42737** Date **12/20/2017**


Comm: **172059**
Date: **12/20/17**
Drawn: **AW**
Check: **EBL**


North


Scale: **As indicated**

A4.221


MN

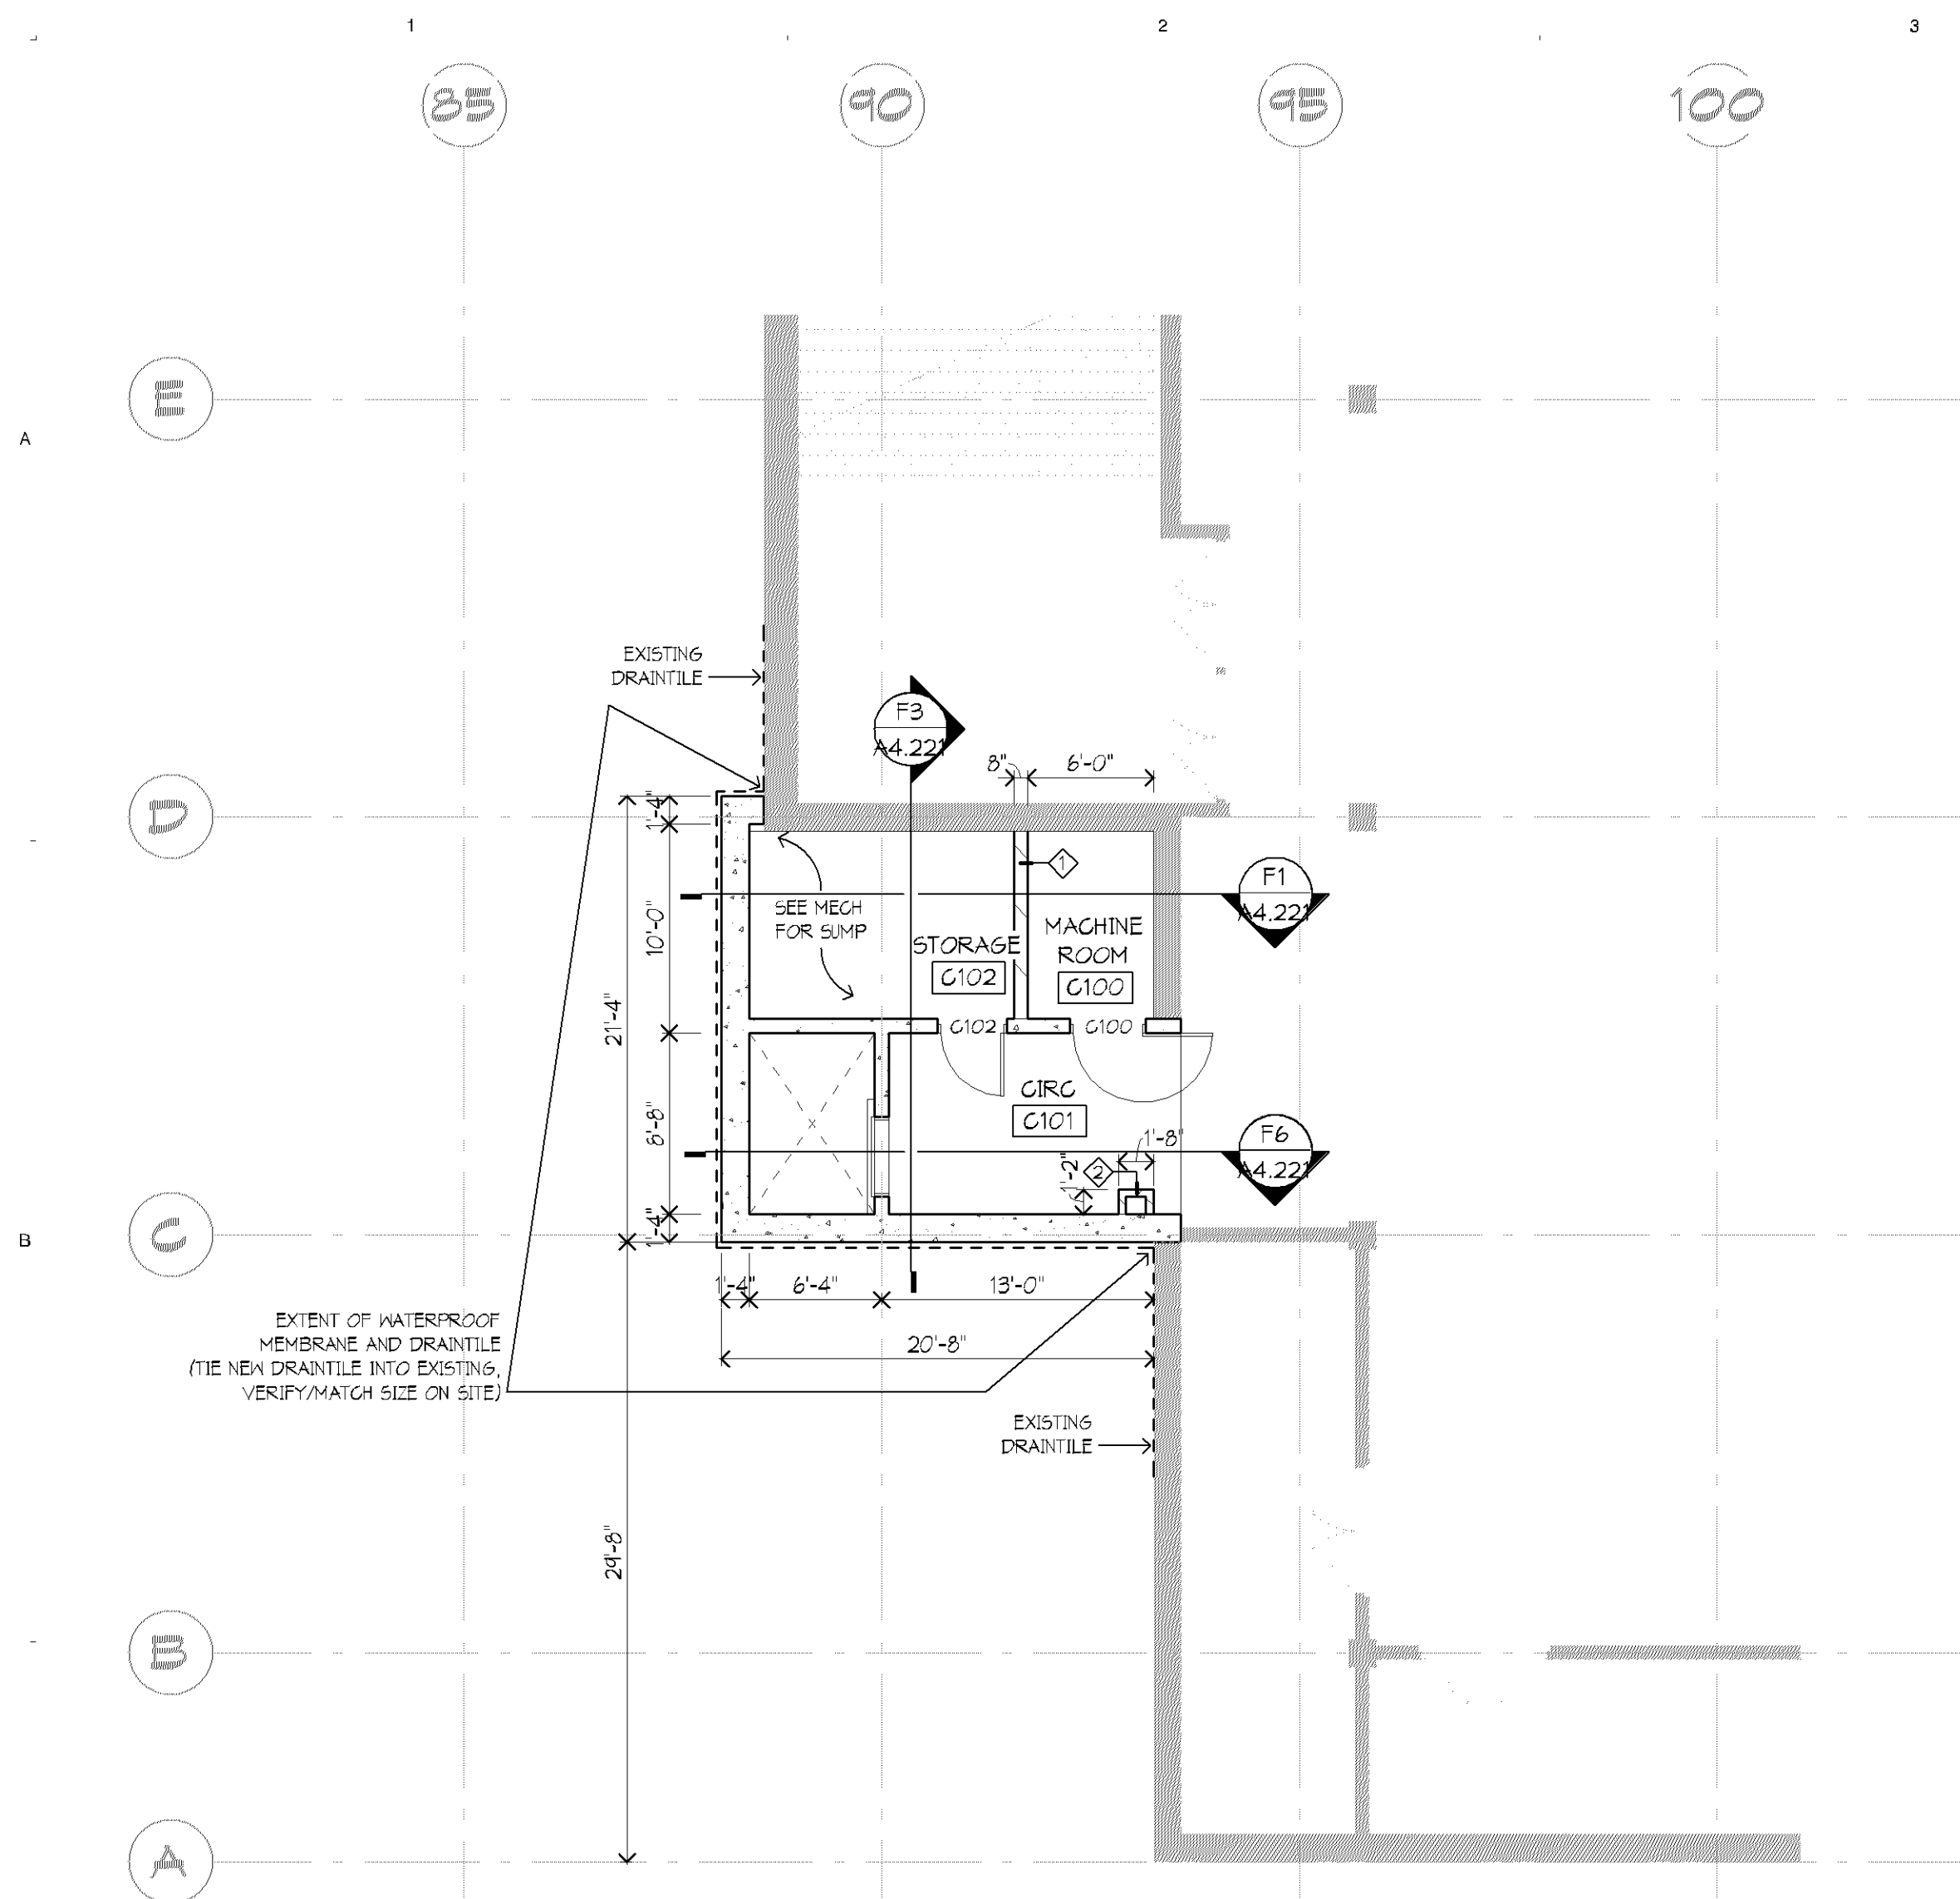


C1 LOWER LEVEL FLOOR PLAN - AREA 'C'
1/8" = 1'-0"

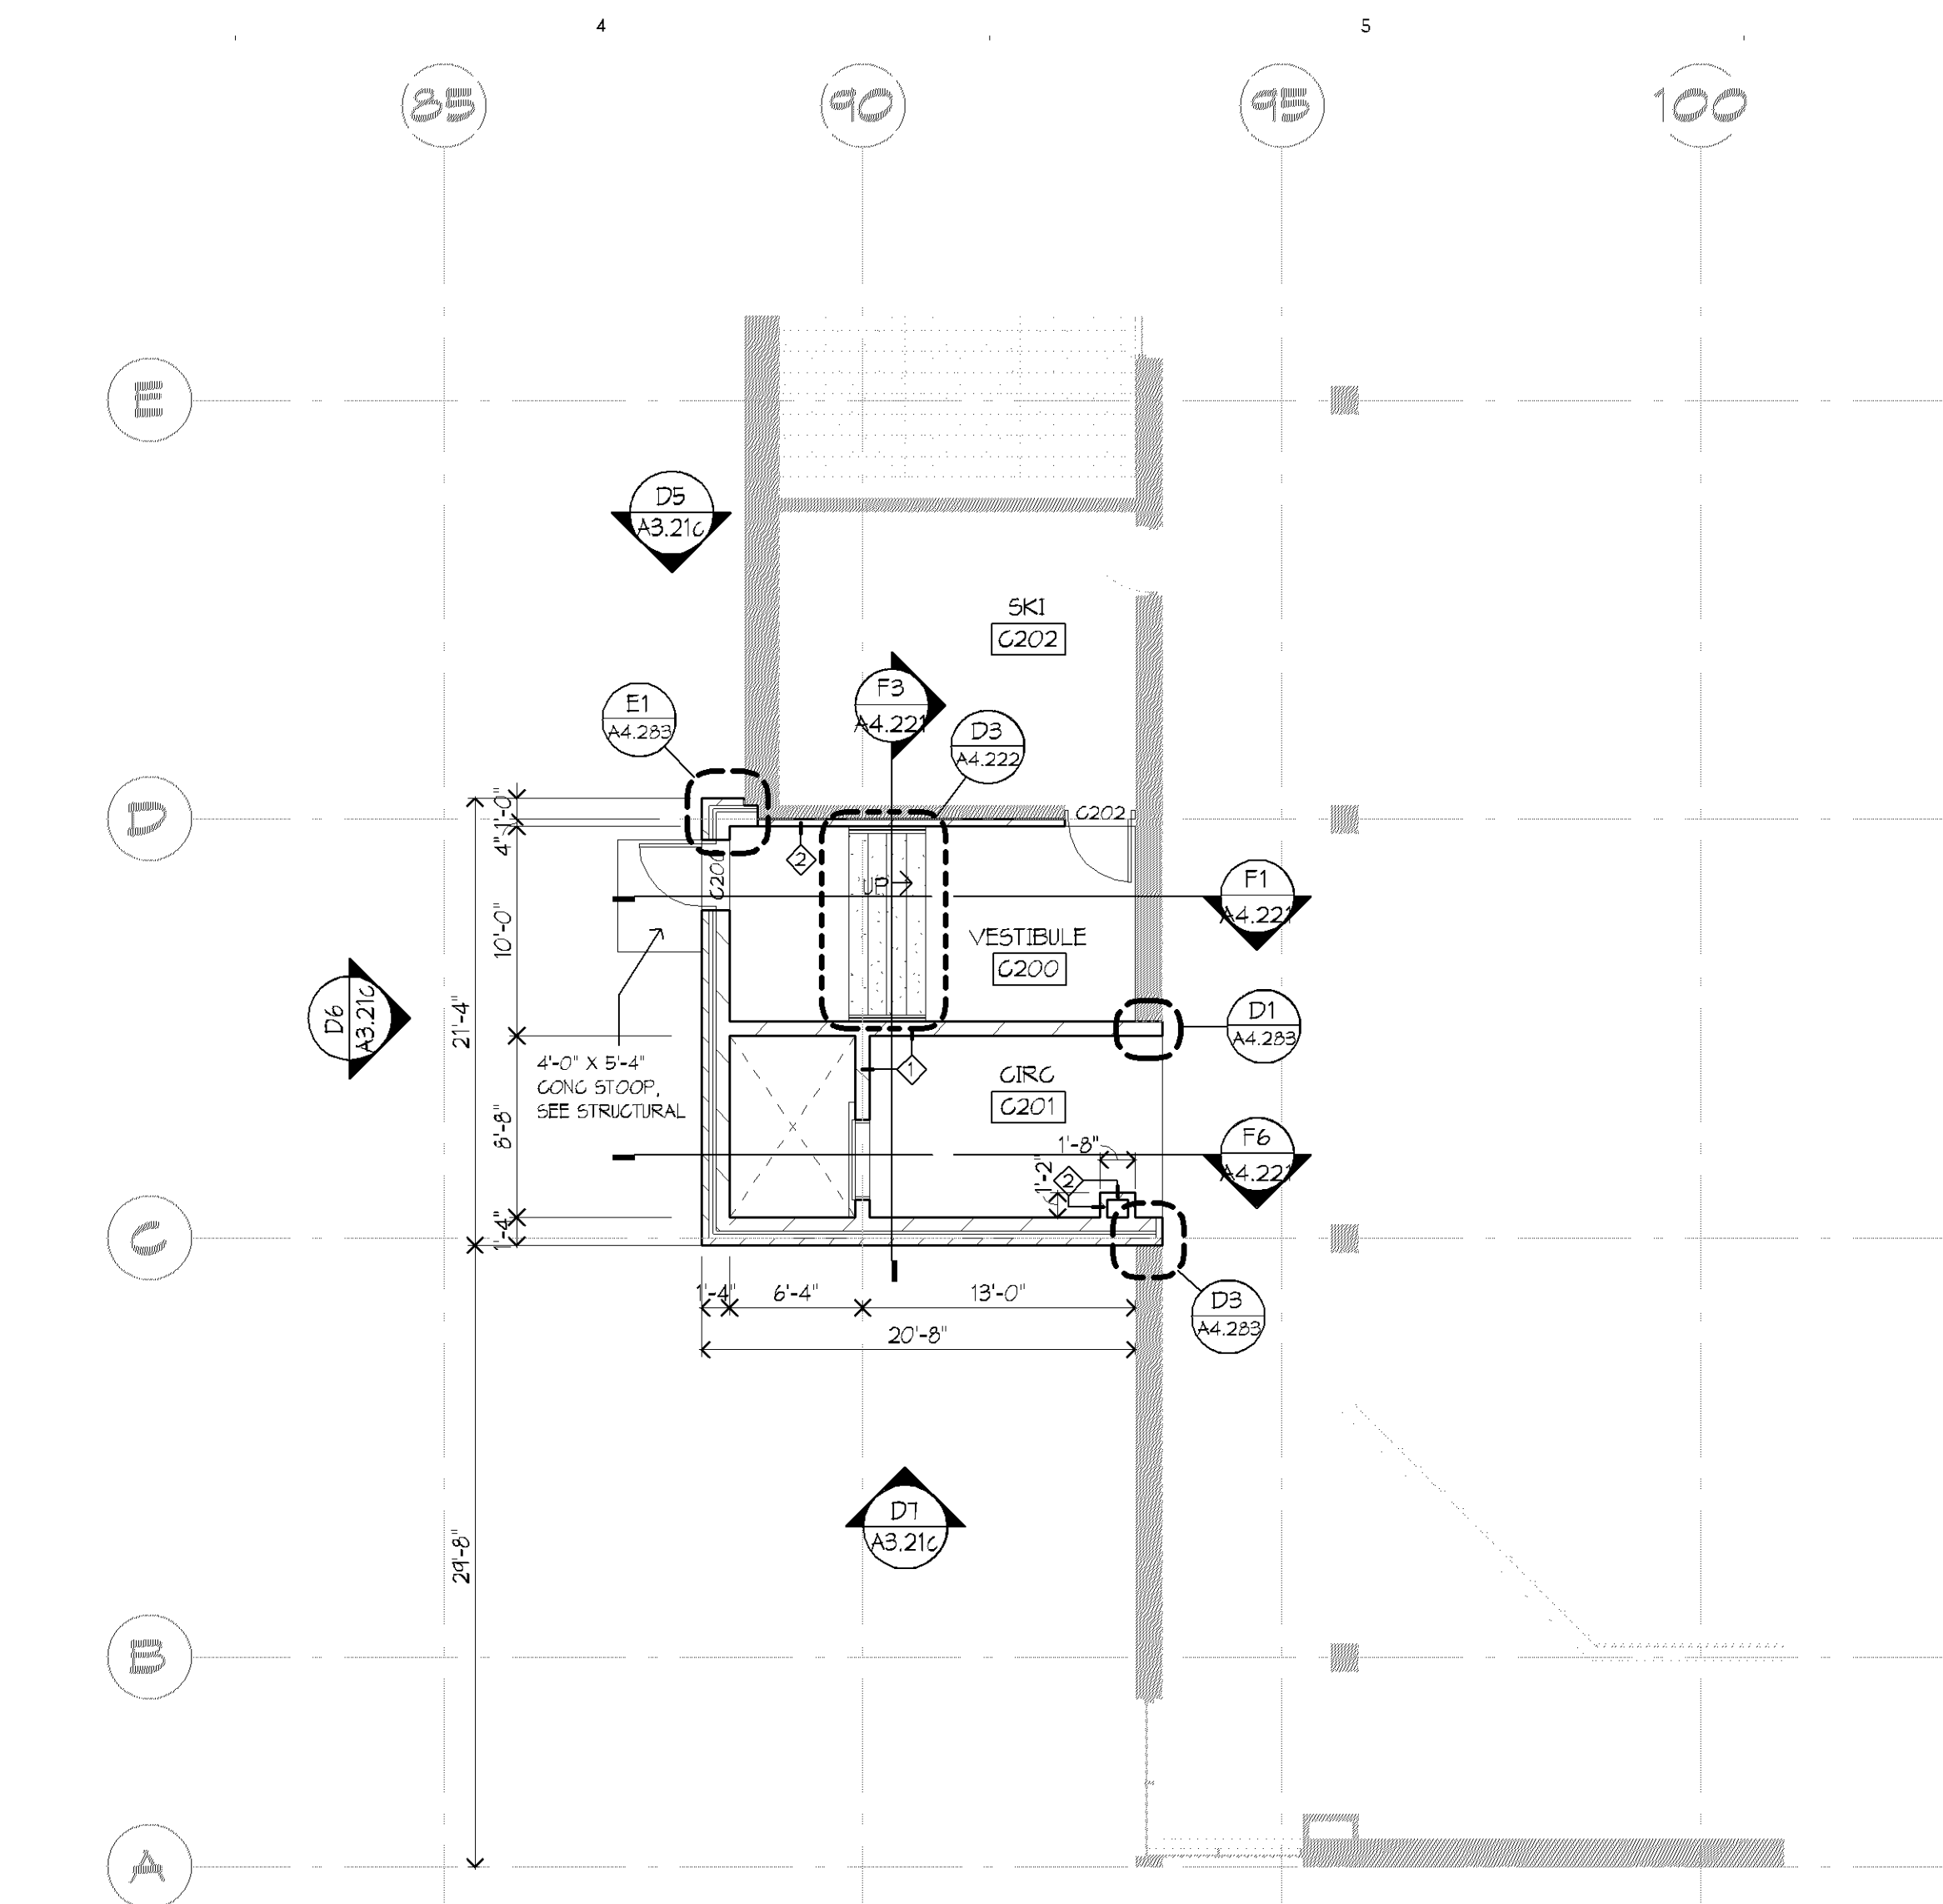

C3 MAIN LEVEL FLOOR PLAN - AREA 'C'
1/8" = 1'-0"

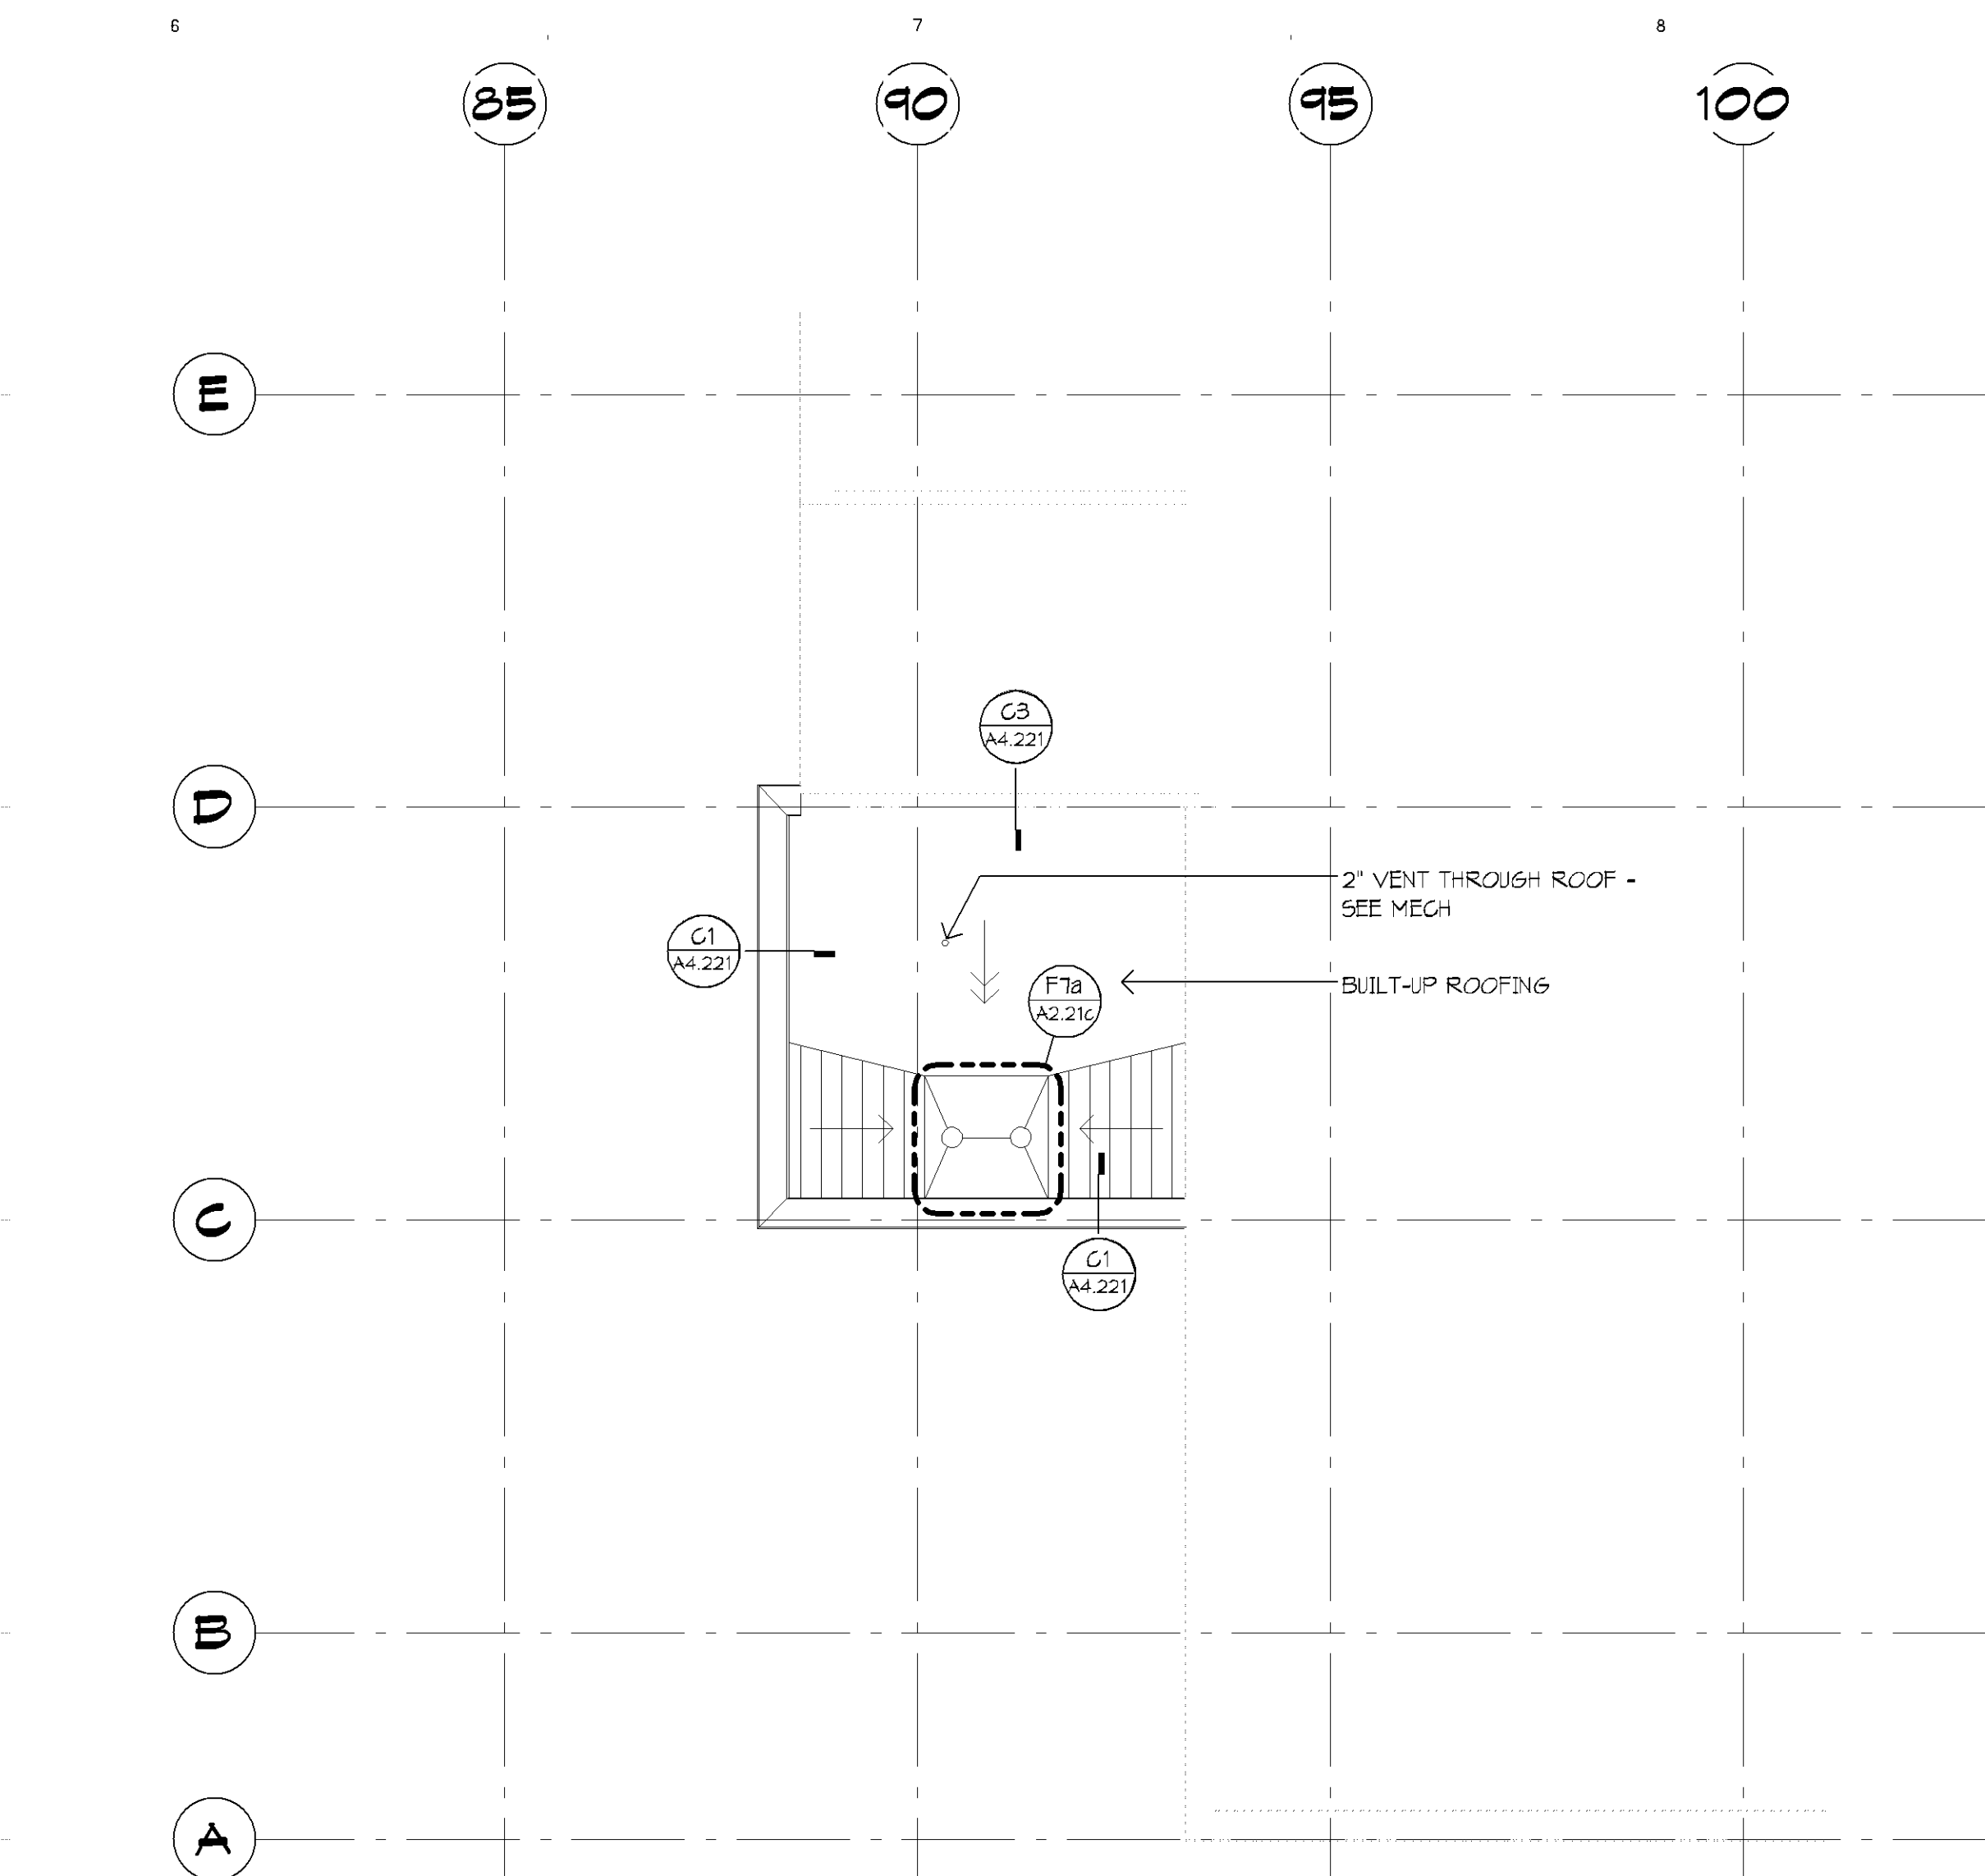

C6 ROOF PLAN - AREA 'C'
1/8" = 1'-0"

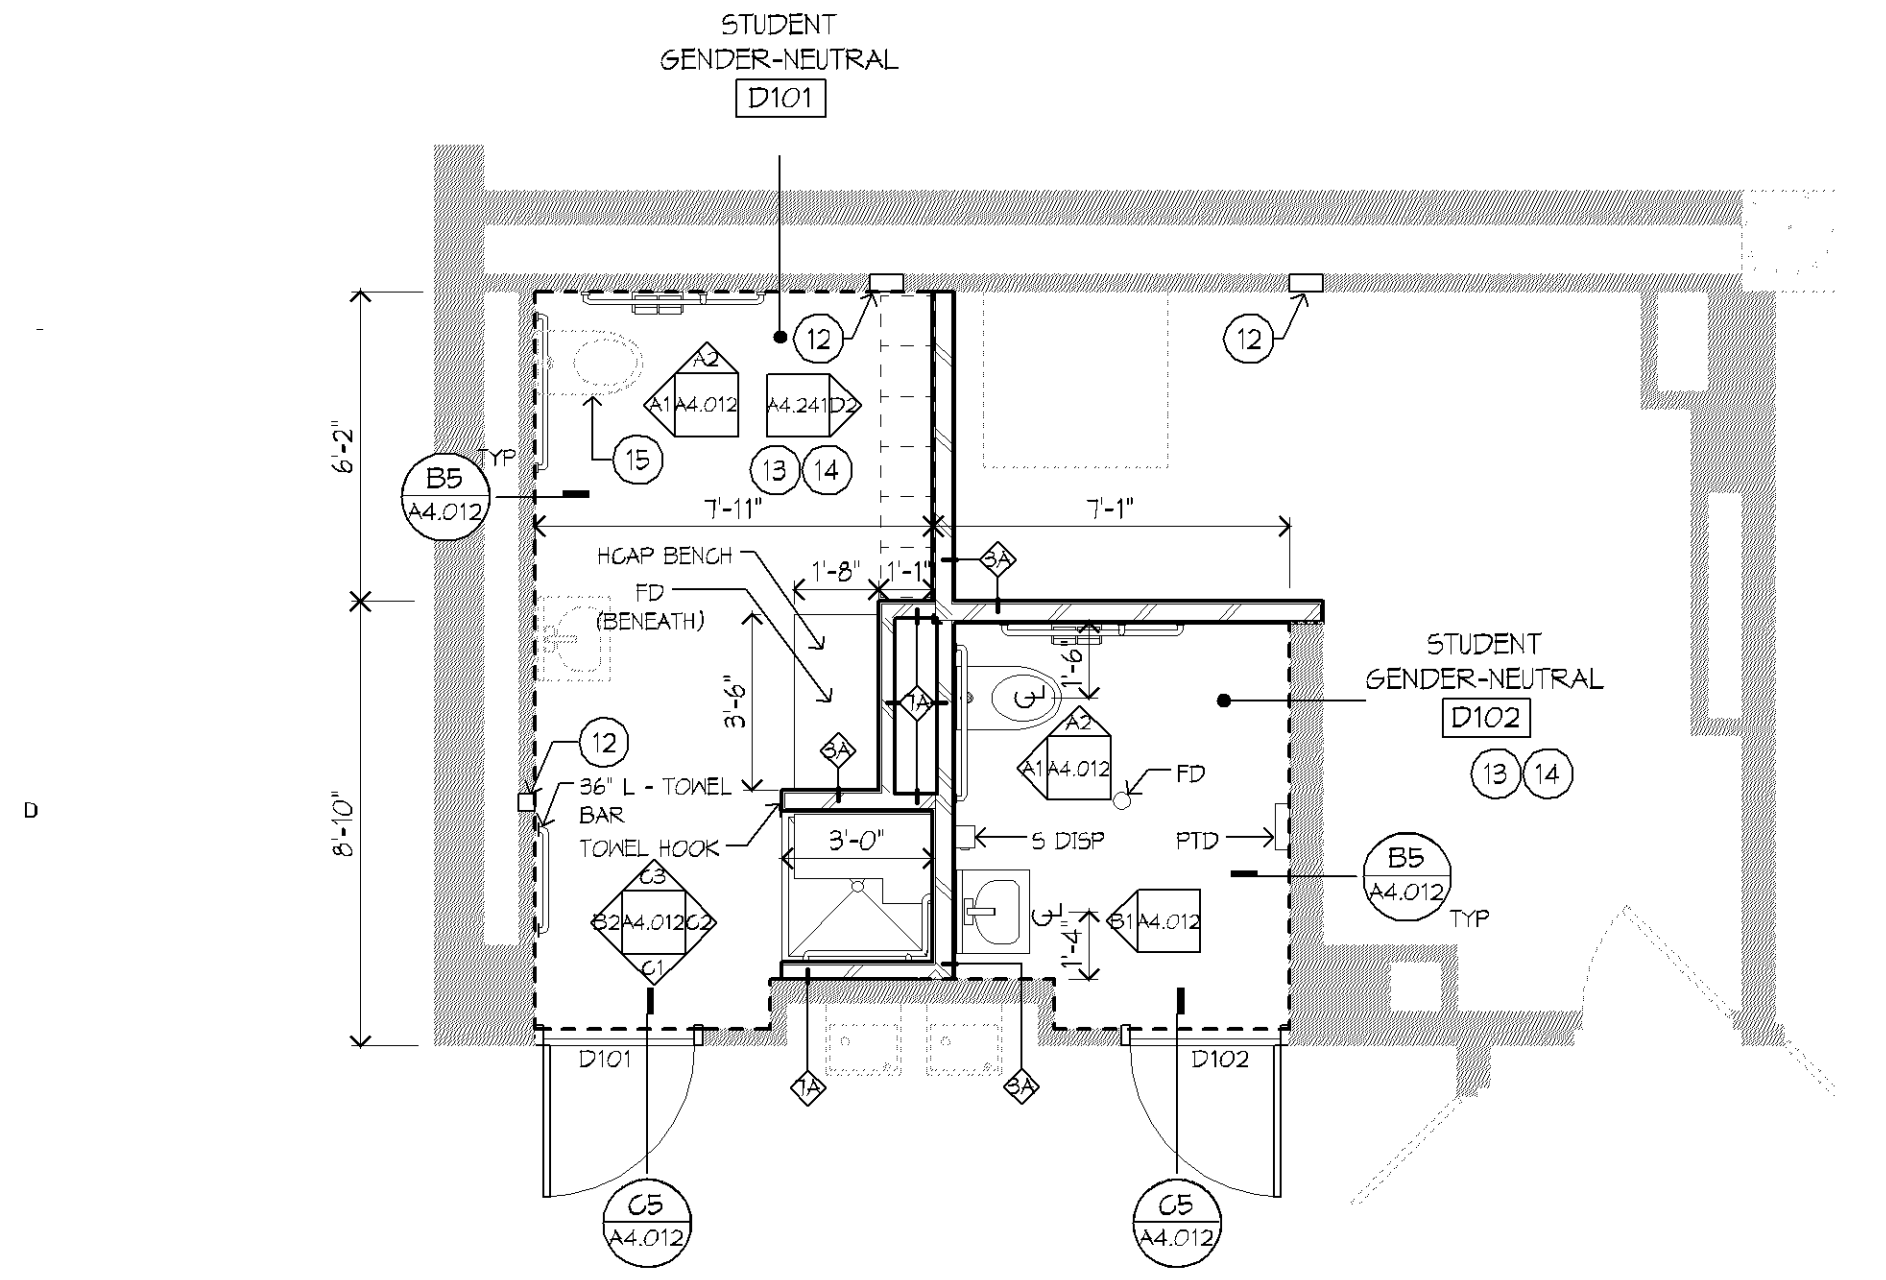

E1 LOWER LEVEL FLOOR PLAN - AREA 'D'
1/4" = 1'-0"

FLOOR PLAN GENERAL NOTES:

- ALL PLAN DIMENSIONS ARE NOMINAL TO FACE OF WALL. WALL THICKNESSES ARE SHOWN NOMINAL. SEE WALL TYPES FOR ACTUAL THICKNESS.
- ALL CONCRETE BLOCK WALLS ARE TO BE 8 INCHES THICK UNLESS OTHERWISE NOTED.
- COORDINATE SIZE AND LOCATION OF ALL DUCT AND SHAFT OPENINGS IN WALLS AND FLOORS W/ MECH. AND ELEC. PROVIDE ALL REQUIRED LINTELS FOR OPENINGS. SEE LINTEL SCHEDULE.
- FIELD VERIFY ALL MILLWORK OPENINGS. SET FLOOR DRAINS 3/4" BELOW FINISHED CONCRETE FLOORS UNLESS OTHERWISE NOTED. PROVIDE CONSISTENT SLOPE FROM WALL TO DRAIN BY SLOPING.
- CONCRETE, MIN. 1/4" PER FOOT. VERIFY LOCATION, SIZE AND QUANTITY OF ALL MECHANICAL AND ELECTRICAL EQUIPMENT PADS.
- ALL DOOR/SLIDELITE OPENINGS TO BEGIN 4" FROM ADJACENT WALL UNLESS OTHERWISE NOTED.
- ALL GYP. WALLS ARE CENTERED ON GRID UNLESS OTHERWISE NOTED.
- FIRE RATED WALLS ARE INDICATED ON CODE PLANS.
- HEAVY LINE THIS
- INDICATES BUILDING MATCH LINE

FLOOR PLAN KEY NOTES:

- PATCH FLOOR SLAB AT REMOVED WALL. PROVIDE SELF-LEVELING TOPPING (TYPICALLY 4'-0" TO ONE SIDE) TO CORRECT ANY FLOOR ELEVATION INCONSISTENCY.
- PROVIDE P TILE 3 TO BOTTOM OF SOFFIT TO EXTENT OF DOUBLE DOTTED LINE.
- NEW CARPET THIS AREA. SEE ROOM FINISH SCHEDULE/ FLOOR FINISH PLANS FOR CARPET TYPES.
- PATCH CARPET AT HATCHED AREA WITH OPT 1 AND OPT 2 TO MATCH EXISTING PATTERN.
- PATCH GYP BD WALL AT REMOVED WALL/ CASEWORK.
- REINSTALL SALVAGED KIOSK.
- PROVIDE P TILE TO BOTTOM OF SOFFIT TO EXTENT OF DOTTED LINE. SEE D1/A4.241 FOR PATTERN.
- FLOOR EXPANSION JOINT. SEE DETAILS.
- PATCH FLOOR WITH SELF-LEVELING TOPPING AND NEW FLOORING AS SCHEDULED AT REMOVED WALL. MATCH ADJACENT FLOOR LEVELS.
- INFILL MASONRY WALL TO MATCH ADJACENT WALL THICKNESS. MATCH MASONRY COURSING. PAINT WALL FULL HEIGHT CORNER TO CORNER AS SCHEDULED.
- PATCH G BLK WALL AT AREA OF MECH PIPING WORK TO MATCH EXISTING. PAINT WALL FULL HEIGHT CORNER TO CORNER AS SCHEDULED.
- PATCH G BLK WALL TO MATCH EXISTING AT AREA OF REMOVED ITEM. PAINT WALL FULL HEIGHT CORNER TO CORNER AS SCHEDULED.
- PROVIDE NEW CONG SLAB AND VAPOR BARRIER. COORD. EXTENTS W/ DEMO PLAN.
- PROVIDE MORTAR BED FOR NEW P TILE AS SCHED. SLOPE FLOORS AS REQ'D TO TRANSITION FLOOR HEIGHT AT ADJACENT ROOMS.
- PROVIDE NEW TOILET SEAT FOR EXISTING FIXTURE. SEE MECH.
- 12" G BLK INTILL. SEE STRUCT.
- PAINT WALL PT 6F.
- NEW VENT THROUGH ROOF ABOVE FOR NEW SINK. SEE DETAILS B4/A4.222 AND X15/A4.222.
- PATCH EXIST CONG SLAB/ VAPOR BARRIER AS REQUIRED. SEE DETAIL. /----
- REPAIR HM FRAME AT REMOVED STAINLESS BUMPER. REPAINT ENTIRE FRAME.
- REINSTALL SALVAGED FACE BRICK.
- PATCH CARPET AT REMOVED BENCHES WITH OPT 1 AND OPT 2 TO MATCH EXISTING PATTERN.
- PROVIDE TACKABLE WALLCOVERING FULL-HEIGHT TO EXTENTS INDICATED BY DOTTED LINE.
- PROVIDE VINYL BASE.
- PAINT PT 6A. PROVIDE AND INSTALL VB 1 AT BOTH SIDES OF NEW GYP WALL.
- PATCH CARPET AT HATCHED AREA WITH SALVAGED CARPET.
- PAINT WALL OR COLUMN PT 6F.
- INTILL AT REMOVED P LAM PANELS WITH 1 1/2" MTL STUDS AND 1/2" GYP BD TO FINISH SURFACE WITH ADJACENT BRICK.
- INFILL AT REMOVED GRILL WITH 4" G BLK.
- NOM 5" GYP BD ON MTL STUD WALL BELOW COUNTER.
- PATCH TERRAZZO TO MATCH EXISTING AT REMOVED CONG SLAB.
- REGROUND TERRAZZO AT REMOVED LOCKERS.
- PROVIDE TYP P TILE PATTERN AT WALL. SEE DETAIL D1/A4.241.

ROOM FINISH SCHEDULE - AREA 'C'											
ROOM NO	ROOM NAME	FLOOR	BASE	N WALL - TYP		E WALL		S WALL		W WALL	
				MATL	FIN	MATL	FIN	MATL	FIN	MATL	FIN
G100	MACHINE ROOM	CONG	VB 1			PT 6A	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK
G101	CRG	CONG	VB 1	G. BLK		PT 6A	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK
G102	STORAGE	CONG	VB 1	G. BLK/ CONG	PT 6A						
G111	ELEV	RF	--	--	--	--	--	--	--	--	--
G200	VESTIBULE	CONG	VB 1	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK	PT 6A
G201	CRG	CONG	VB 1	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK	PT 6A	G. BLK	PT 6A
G202	SK1										

ROOM FINISH SCHEDULE - AREA 'D'											
ROOM NO	ROOM NAME	FLOOR	BASE	N WALL - TYP		E WALL		S WALL		W WALL	
				MATL	FIN	MATL	FIN	MATL	FIN	MATL	FIN
D101	STUDENT GENDER-NEUTRAL	P TILE	P TILE 6	EXIST/ GYP BD	GT	EXIST/ GYP BD	GT	EXIST / GYP BD	GT	EXIST	GT
D102	STUDENT GENDER-NEUTRAL	P TILE	P TILE 6	GYP BD	GT	EXIST	GT	EXIST	GT	EXIST / GYP BD	GT

ROOM FINISH SCHEDULE GENERAL NOTES

- SEE DETAILS OF CONSTRUCTION FOR ABBREVIATIONS.
- IF ALL WALLS IN ROOM HAVE THE SAME FINISH, THE "N WALL-TYP" COLUMN WILL BE USED.
- DISCREPANCIES BETWEEN THE ROOM FINISH SCHEDULE AND DRAWINGS SHALL BE REPORTED TO THE ARCHITECT FOR FINISH DETERMINATION.
- ON WALLS WHICH ARE COVERED WITH MILLWORK AND TACK SURFACES, A FINISH SHALL NOT BE APPLIED TO THE WALL BEHIND EXCEPT FOR LOCATIONS WHICH MAY BE EXPOSED (I.E. SPACE BETWEEN MILLWORK AND TACK SURFACE). CONCRETE BLOCK BEHIND MILLWORK AND MARKERS/BOARDS TO BE TOOK.
- REFER TO MATERIAL FINISH/ COLOR SCHEDULE FOR SPECIFIC FINISH TYPES AND COLORS.
- FOR CEILING MATERIAL WHEN MORE THAN ONE CEILING MATERIAL OCCURS THE CEILING FINISH IS INDICATED THIS "Y".

ROOM FINISH SCHEDULE REMARKS

- SEE FLOOR FINISH PLANS FOR OPT PATTERN.
- SEE INTERIOR ELEVATIONS FOR WALL TILE PATTERN.
- SEE B1/A4.012 FOR WALL TILE TYPES/ PATTERN.
- SEE C1/A4.012 FOR FLOOR TILE TYPES/ PATTERN.

DOOR / OPENING SCHEDULE - AREAS 'C' AND 'D'															
DOOR NO	TYPE	QTY	DOOR / OPENING		FRAME	MOUNTING CONDITIONS	HDM GRP	REMARKS							
			WIDTH	HEIGHT	MATL	TYPE	DEPTH	MATL	SL	HEAD	JAMB	SILL			
G100	F	1	3'-4"	T-0"	HM	--	FR 1	--	--	F1/A4.251	F2/A4.251		10		
G102	F	1	3'-0"	T-0"	HM	--	FR 1	--	--	F1/A4.251	F2/A4.251		04		
G200	F	1	3'-0"	T-0"	H.M.	--	FR 1	--	--	D6/A4.251	E6/A4.251		11		
G202	F	1	3'-0"	T-0"	HM	--	FR 1	--	--	F6/A4.251	E6/A4.251		08		
D101	F	1	3'-0"	T-0"	WD	--	FR 1	--	--	D1/A4.251	D2/A4.251		19		
D102	F	1	3'-0"	T-0"	WD	--	FR 1	--	--	D1/A4.251	D2/A4.251		01		

DOOR SCHEDULE GENERAL NOTES

- ALL DOORS ARE 1 3/4" THICK UNLESS OTHERWISE NOTED.
- FOR FRAME DEPTH, ONLY EXCEPTIONS TO THE FOLLOWING TABLE ARE SCHEDULED.
GYPSUM BOARD PARTITIONS: THROAT OF FRAME TO MATCH WALL THICKNESS.
MASONRY PARTITIONS:
4" WALL: 3 3/4" FRAME
6" WALL: 5 3/4" FRAME
8" AND GREATER WALL: 7 3/4" FRAME
FRAME DEPTHS ARE SCHEDULED IN NOMINAL DIMENSIONS. SEE FRAME/ DOOR TYPES (DETAIL SECTION 51000) FOR CORRESPONDING ACTUAL DIMENSIONS.
- FOR GLASS TYPES, ONLY EXCEPTIONS TO THE FOLLOWING TABLE ARE SCHEDULED.
INTERIOR NON RATED:
CLEAR (BATTERY WHEN REQUIRED BY TABLE IN GLAZING SPECIFICATION.)
INTERIOR AND EXTERIOR RATED:
FIRE RATED:
EXTERIOR NON RATED:
CLEAR (INSULATED (BATTERY WHEN REQUIRED BY TABLE IN GLAZING SPECIFICATION.)
SEE SHEET A2.901 FOR DOOR & FRAME TYPES.
- AT DOOR SCHEDULE, LABEL DESIGNATION "45/20" INDICATES:
FOR ALL OPENINGS WITH SIDE LITES AND SCHEDULED TO BE RATED FOR 20 MINUTES, THE DOOR AND ANY GLASS WITHIN THE DOOR IS TO BE RATED FOR 20 MINUTES; THE FRAME AND ADJACENT SIDELITES/ GLASS IS TO BE RATED FOR 45 MINUTES.

DOOR SCHEDULE REMARKS


- DOOR BY ALT 95 ONLY.

ROOF PLAN GENERAL NOTES


- TAPERED ROOF INSULATION AND CRICKETS SHALL SLOPE AT 1/4" PER 1'-0". THE THICKNESS OF THE BASE INSULATION IS TO BE 4 1/2".
- SHOP DRAWING DESIGN AND INSTALLATION OF TAPERED INSULATION MUST ACCOUNT FOR GAMBER IN STRUCTURE TO INSURE THAT THE ROOF DRAINS AS DESIGNED.
- AT MECH. OPENINGS AND CURBS ON ROOF, PROVIDE CRICKETS AS REQUIRED FOR POSITIVE DRAINAGE OR GUT OPENINGS IN FREE-STANDING CURBS AS AN ALTERNATIVE.
- MECHANICAL ITEM LOCATIONS ARE SHOWN FOR REFERENCE ONLY. REFER TO MECH. DRAWINGS FOR EXTENT OF MECH. EQUIP. AND SIZE AND LOCATION OF ALL ROOF PENETRATIONS.
- ALL MECHANICAL AND ELECTRICAL ROOFTOP EQUIPMENT, PIPING, CONDUIT, ETC. TO BE PAINTED.
- COORDINATE ROOF AND OVERFLOW DRAIN LOCATIONS WITH STRUCTURAL COMPONENTS TO AVOID LOCATING ROOF OR OVERFLOW DRAINS OVER TOP OF BEAMS OR JOISTS.
- REFER TO EXTERIOR ELEVATIONS FOR LOCATION OF OVERFLOW SCUPPERS AND OUTFLOWS.
- AT ALL LADDERS, TOP AND BOTTOM, PROVIDE AND INSTALL A 4'-0" X 4'-0" CONCRETE PAVES LANDING.
- ROOF LADDERS WITH NUMBER IN PARENTHESES INDICATE RELATIVE ROOF DECK ELEVATION DIFFERENCES, NOT INCLUDING PARAPET. VERIFY EXACT LADDER HEIGHT REQUIREMENTS.

ROOF LEGEND

- ROOF DRAIN (R.D.) OVERFLOW DRAIN (O.R.D.)
- MECH HOOD
- EQUIPMENT CURB AT MECHANICAL EQUIPMENT
- ROOF EXHAUST
- EQUIPMENT CURB SUPPORTING PIPING OR CONDUIT. INSTALL MAXIMUM SPACING OF 6'-0" O.C.
- VENT STACK, PIPE OR CONDUIT
- COMBUSTION STACK
- SKYLIGHT
- CRICKET FOR POSITIVE DRAINAGE
- SLOPE OF TAPERED INSULATION
- DIAMOND CRICKET (SEE TYPICAL DETAIL.)
- SLOPED STRUCTURE
- LANDING
- ROOF LADDER

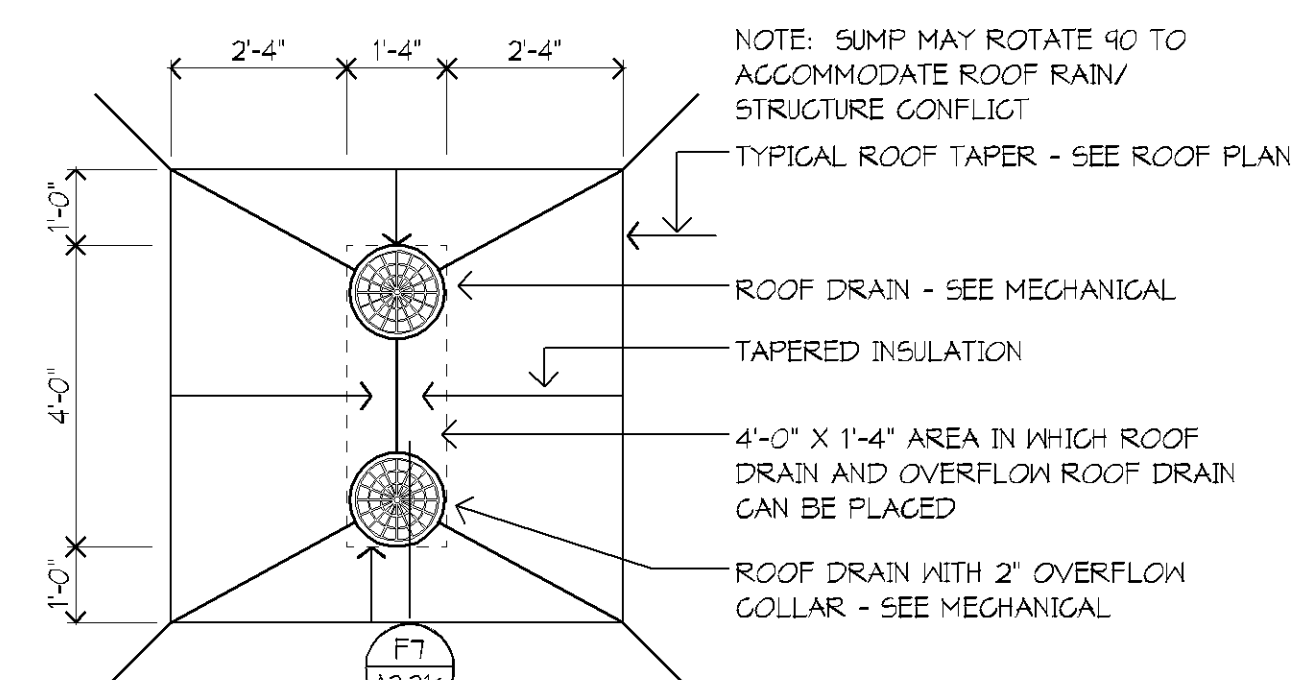


F7a ROOF DRAIN SUMP TYPICAL PLAN
3/8" = 1'-0"

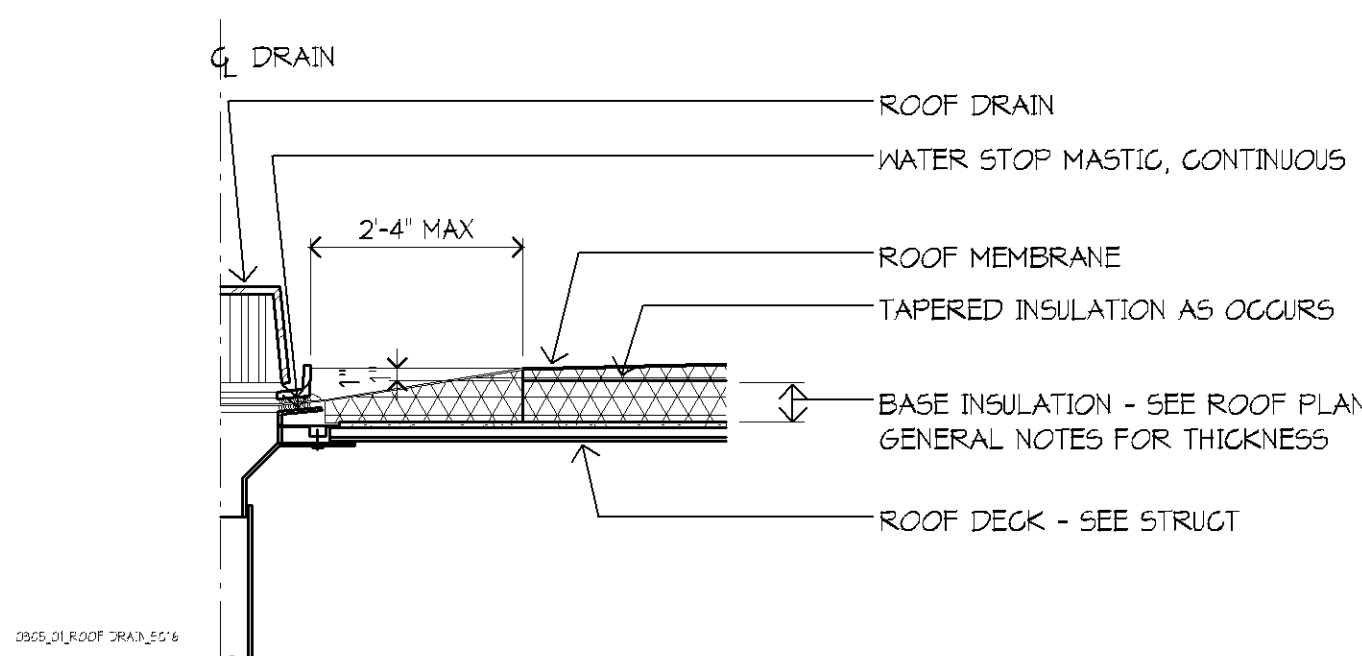

F7 ROOF DRAIN SUMP SECTION
3/4" = 1'-0"


Jefferson High School Renovations
4001 West 120nd Street
Bloomington, MN 55437

Independent School District #271
1350 West 106th Street
Bloomington, MN 55431

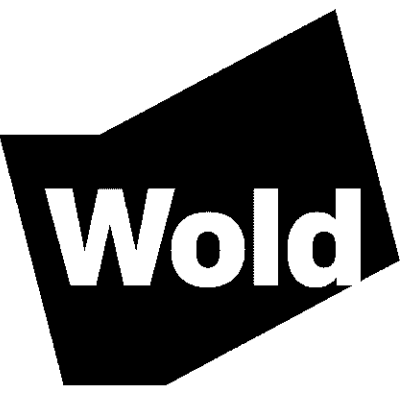


WOLD ARCHITECTS AND ENGINEERS
332 Minnesota Street, Suite W3000
Saint Paul, MN 55101

woldae.com | 651.227.7773

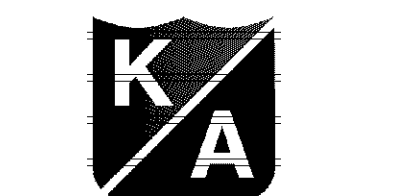

KRAUS-ANDERSON Construction Company

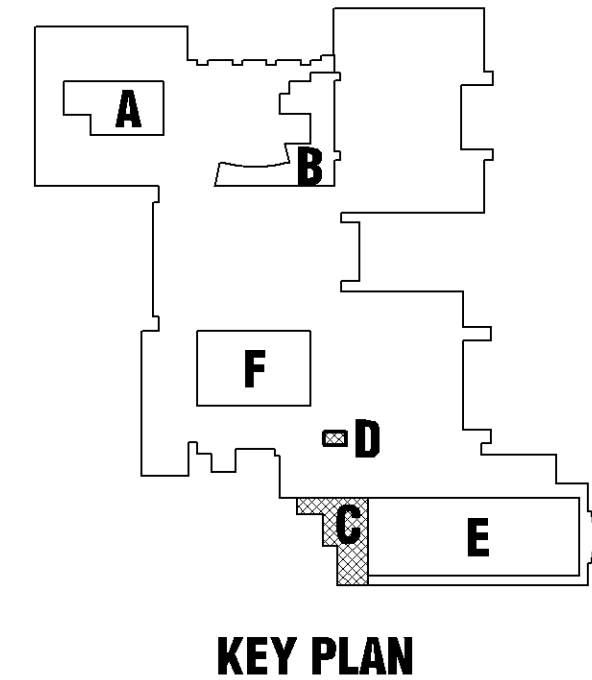

KEY PLAN

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed

under the laws of the State of Minnesota

Paul Applikowski
Paul Applikowski
42737
Date: 12/20/2017

Revisions		
Description	Date	Num

Comm: 172059
Date: 12/20/17
Drawn: PT
Check: EBL

AREAS 'C' AND 'D' FLOOR PLANS

Scale: As indicated

A2.21c