

- Must meet 2020 MN State Building Code
- Must meet 2020 MN Accessibility Code
- Building plans must be signed by a MN licensed architect.
- Provide a detailed code analysis with the plans.
- For MN State Statute 1309.0200 - building is required to be sprinklered.

Building/property shall be adequately signed for emergency response.


Entire occupant shall have fully complying sprinkler protection.

A looped water supply feeding a single, combined water service is required for the domestic and sprinkler system water demand.

Maintain emergency vehicle access and circulation throughout the property.

Additional requirements apply to manufacturing and/or grow operations.


Hydrant coverage shall be provided within 50' of the FDC and within 150' of all portions of the structure.

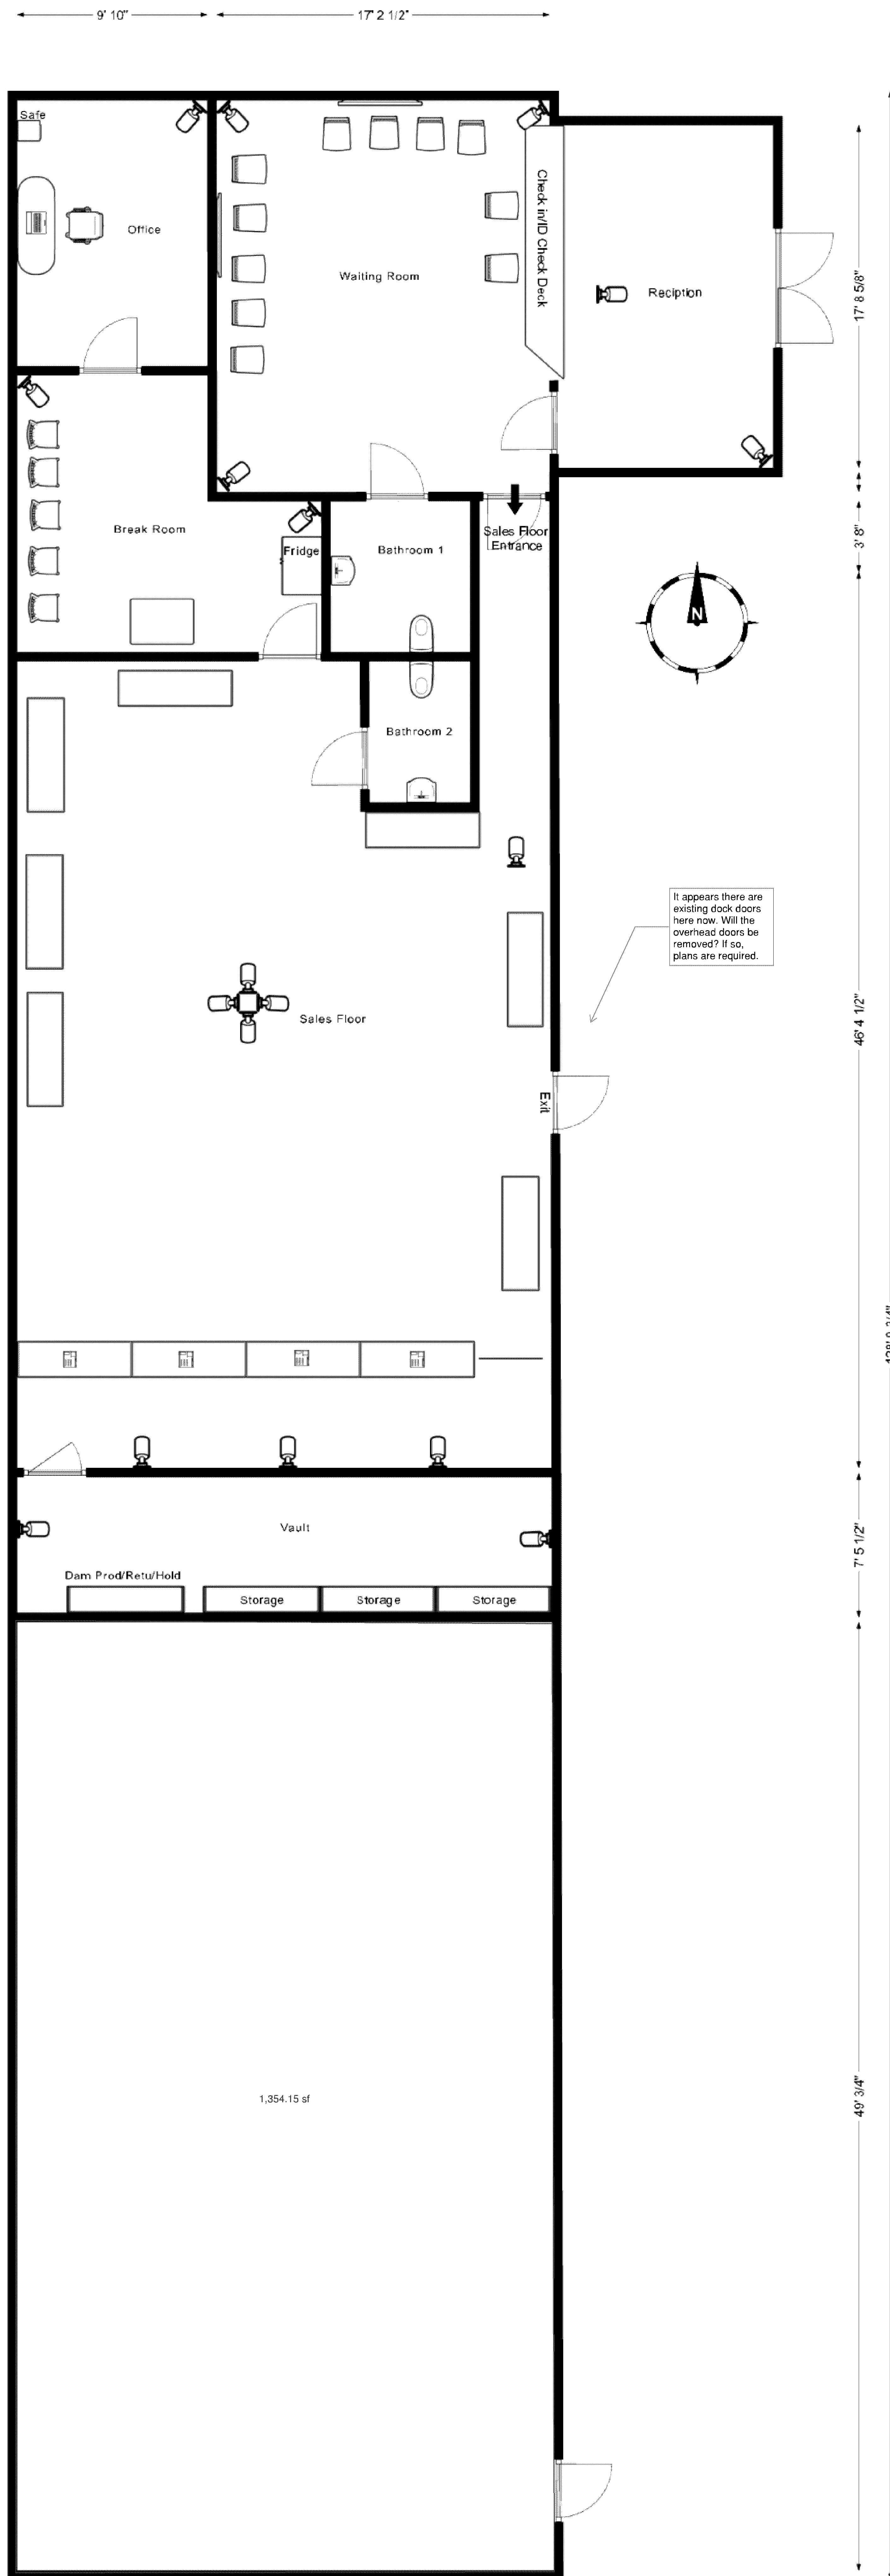


It appears there are existing dock doors here now. Will the overhead doors be removed? If so, plans are required.

PL202500152
PL2025-152

541 West 90th Bloomington
2025 Floor Plans

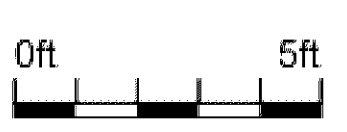

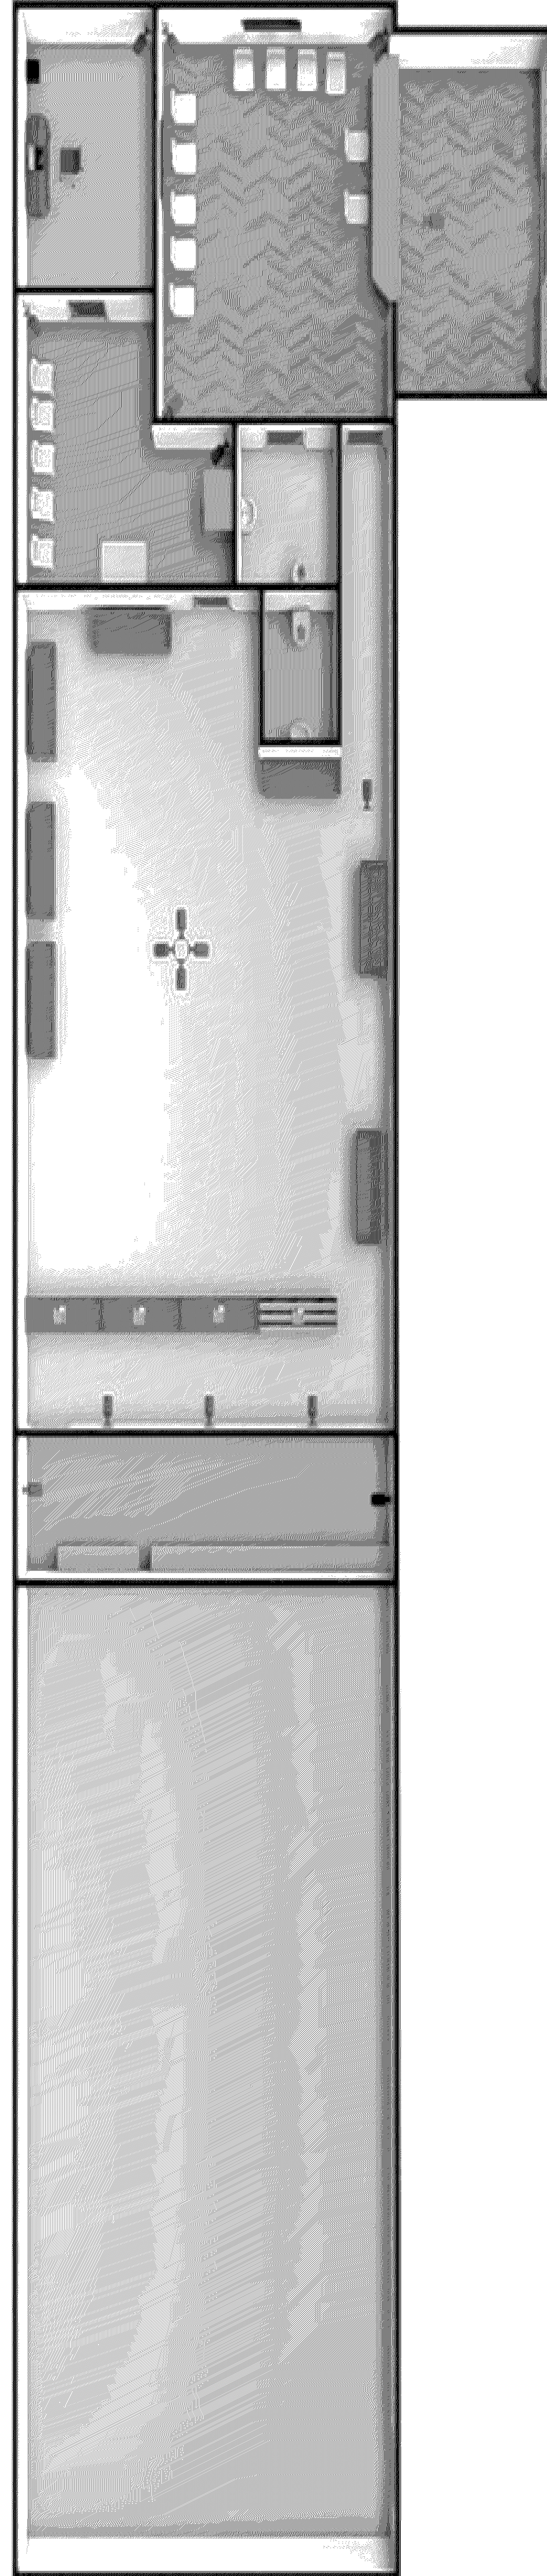

PL202500152
PL2025-152