



C

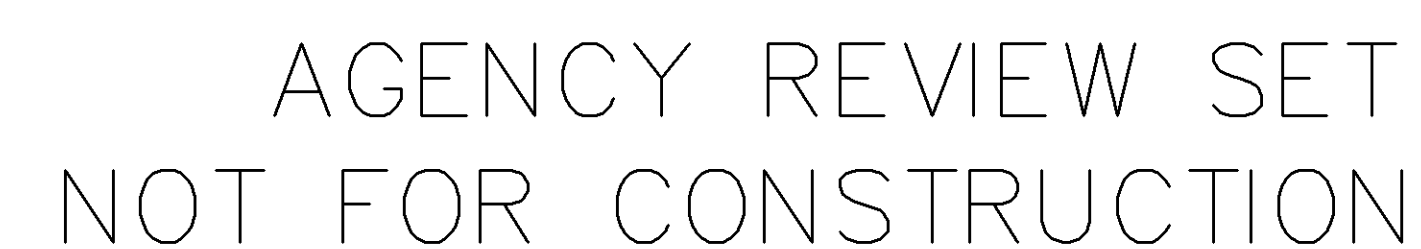

Registration:
I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly registered PROFESSIONAL ENGINEER under the laws of the State of MINNESOTA.

Registration Number 40180 Date 06/30
CAD Data:

Key Point

[illegible]

Project Title:

**HENNEPIN COUNTY
SOUTH SUBURBAN
COURT RELOCATION**

Facility Name (No.) & Address
BLOOMINGTON CIVIC PLAZA
1800 W. OLD SHAKOPEE RD
BLOOMINGTON, MN 55431

EXISTING DRAINAGE MAP

Circle Line - Field Area	Private	Residence
162150	MLB	DAR
Drawing Scale: 1" = 20'		


Proj. Phase: **DD**
 Date: 03/17/17



Proj. Name:	Drawing No.:
DD	C0.20
Date:	Draw. # of ##
03/17/17	

MN

C

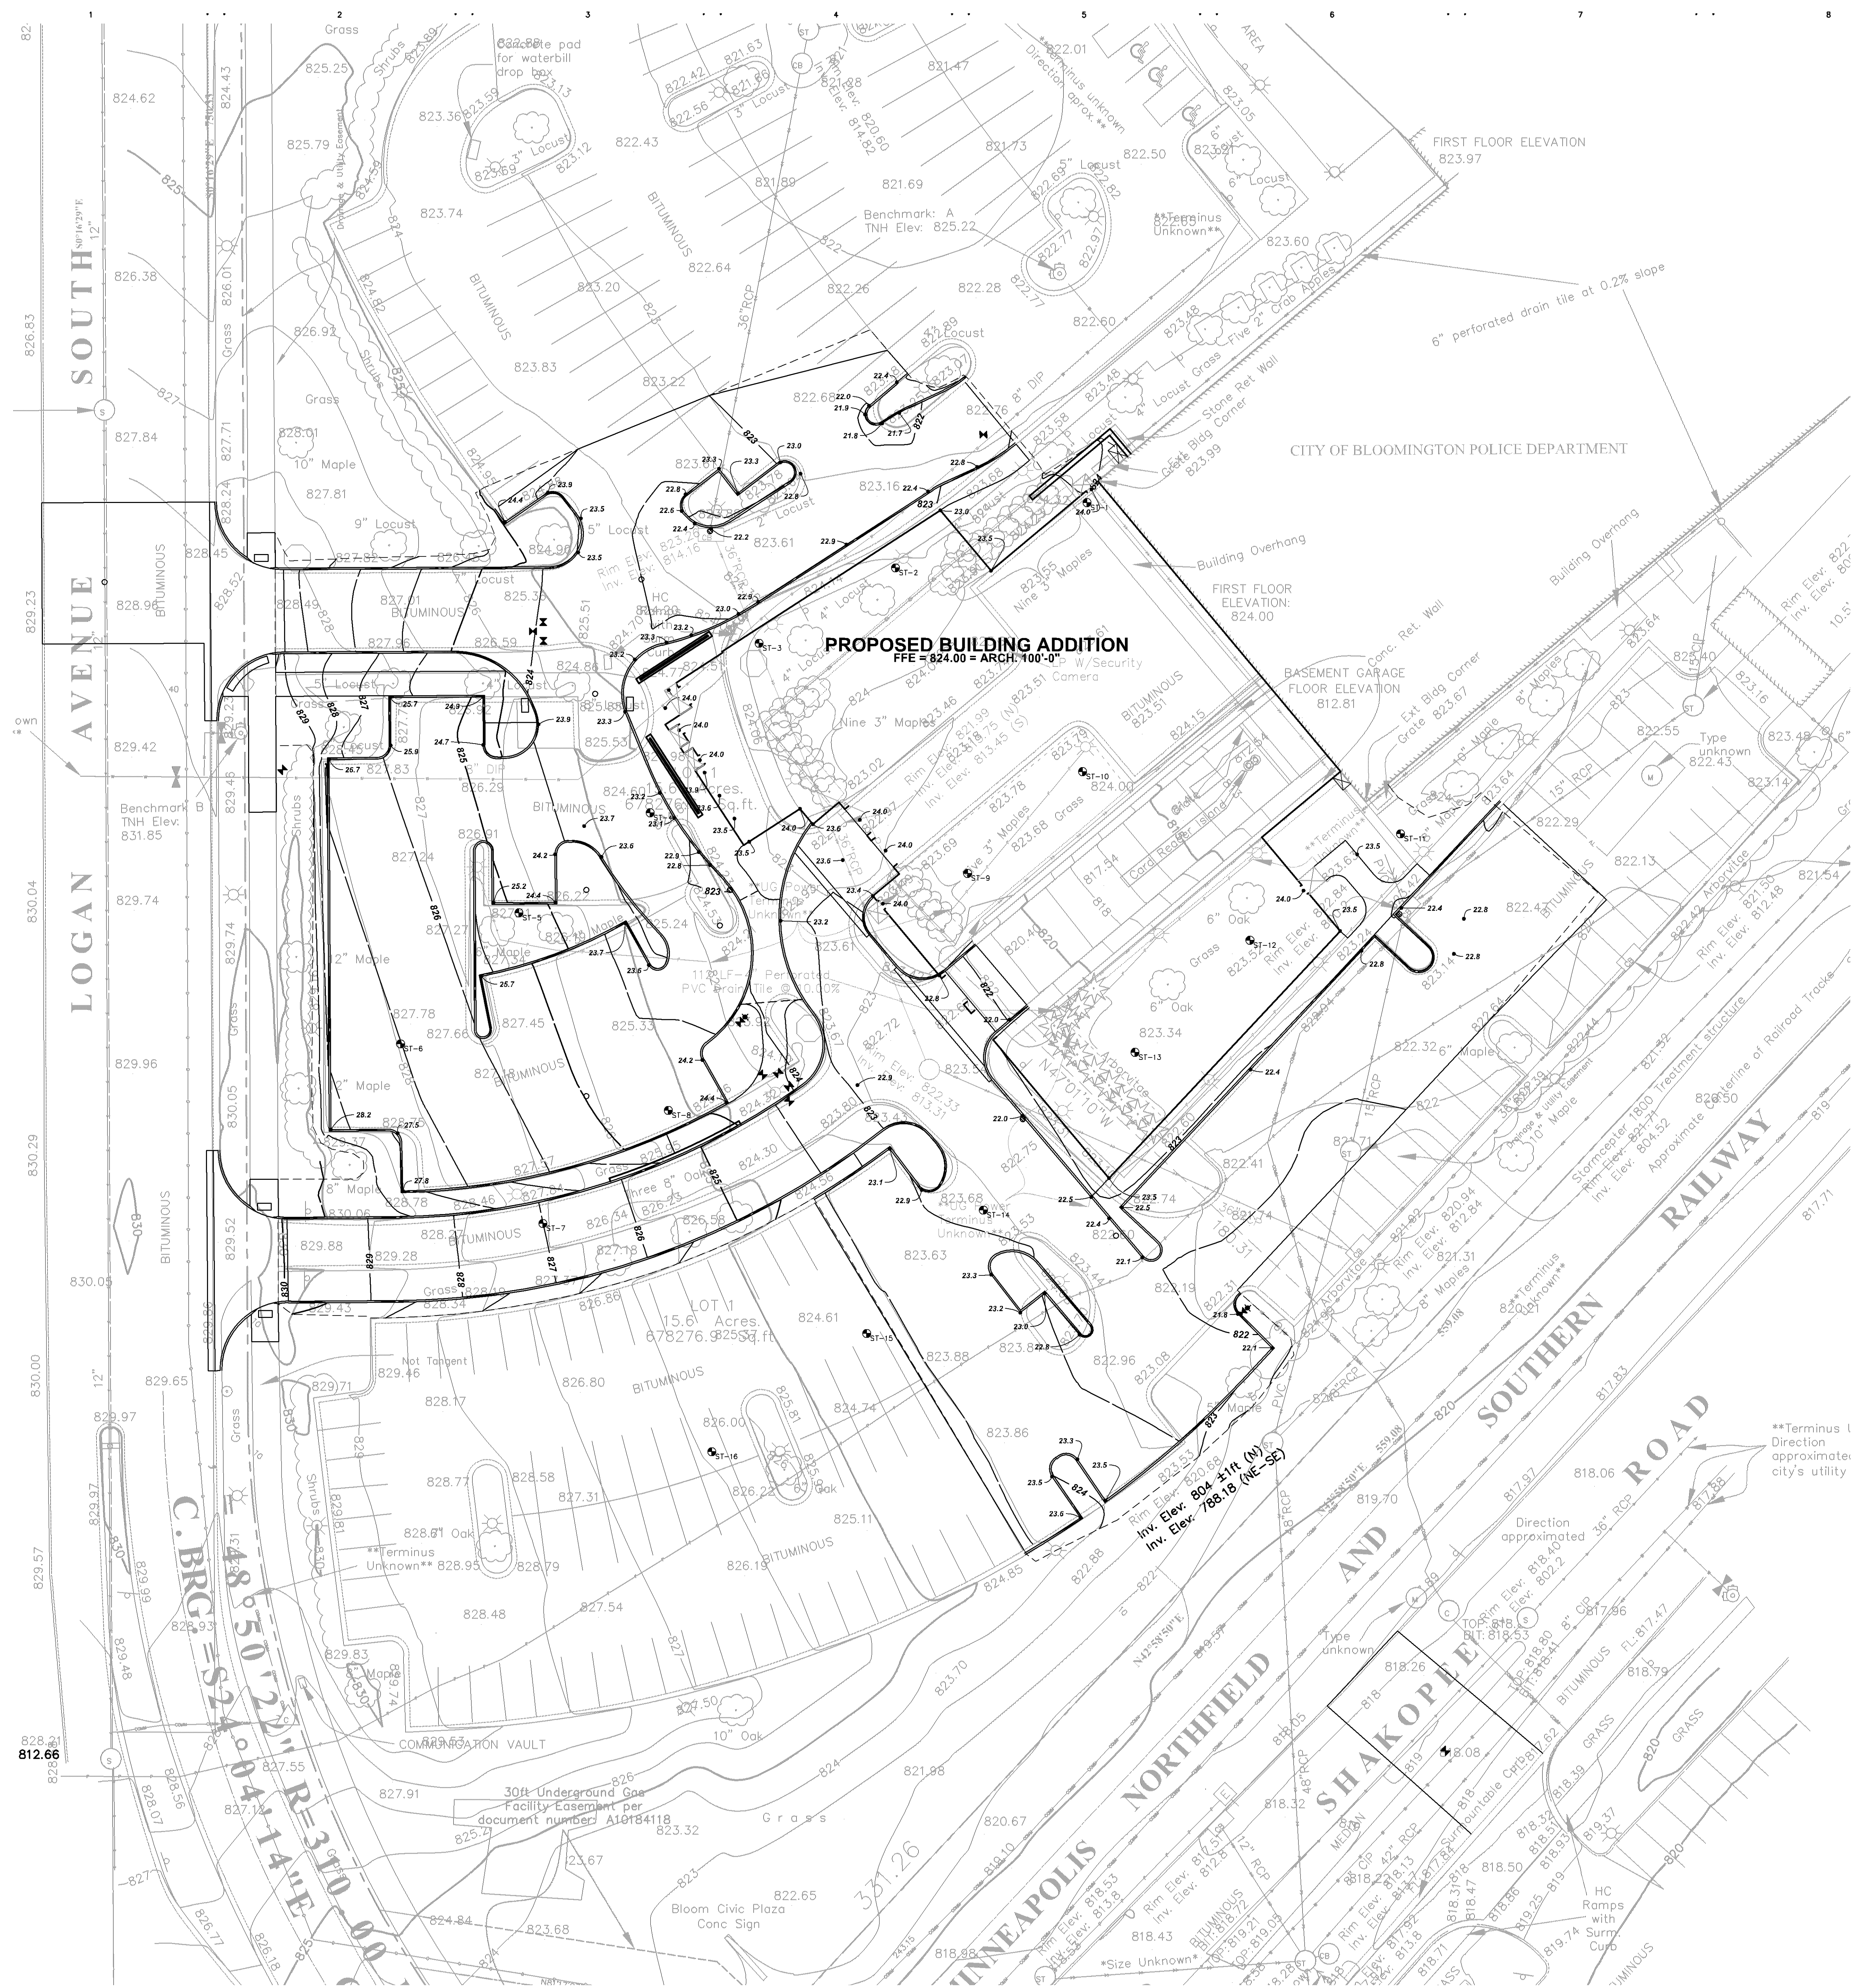

GENERAL NOTES

- ALL CONSTRUCTION MUST COMPLY WITH APPLICABLE STATE AND LOCAL ORDINANCES.
- THE CONTRACTOR WILL BE RESPONSIBLE FOR AND SHALL PAY FOR ALL CONSTRUCTION STAKING / LAYOUT.
- THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL RELATED CONSTRUCTION PERMITS, INCLUDING THE NPDES PERMIT FROM THE MPCA. SUBMIT A COPY OF ALL PERMITS TO THE CITY.
- CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRAFFIC CONTROL SIGNAGE (CONSTRUCTION ZONES) NECESSARY TO CONSTRUCT PROPOSED IMPROVEMENTS. ALL SIGNAGE LAYOUTS MUST BE DESIGNED BY THE CONTRACTOR AND APPROVED BY LOCAL AUTHORITIES.
- INSTALL CONTROL FENCING AND BARRICADING AS NECESSARY TO PROTECT THE PUBLIC.
- INSPECT SITE AND REVIEW SOIL BORINGS TO DETERMINE EXTENT OF WORK AND NATURE OF MATERIALS TO BE HANDLED.
- REFER TO SPECIFICATIONS FOR DEWATERING REQUIREMENTS.
- CHECK ALL PLAN AND DETAIL DIMENSIONS AND VERIFY SAME BEFORE FIELD LAYOUT.
- REFER TO ARCHITECTURAL PLANS FOR BUILDING AND STOOP DIMENSIONS AND LAYOUT.
- REFER TO THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) NARRATIVE, PART OF SECTION 01 81 13, FOR EROSION CONTROL REQUIREMENTS. SECTION 31 00 00 SHALL BE RESPONSIBLE FOR FULL IMPLEMENTATION OF THE SWPPP.
- MAINTAIN ADJACENT PROPERTY AND PUBLIC STREETS CLEAN FROM CONSTRUCTION CAUSED DIRT AND DEBRIS ON A DAILY BASIS. PROTECT DRAINAGE SYSTEMS FROM SEDIMENTATION AS A RESULT OF CONSTRUCTION RELATED DIRT AND DEBRIS.
- MAINTAIN DUST CONTROL DURING GRADING OPERATIONS.
- ALL EROSION CONTROL METHODS SHALL COMPLY WITH MPCA AND LOCAL REGULATIONS.
- CONTRACTOR SHALL MINIMIZE DISTURBANCE TO SITE AND PROTECT EXISTING SITE FEATURES (INCLUDING TURF AND VEGETATION) WHICH ARE TO REMAIN.
- PROPOSED CONTOURS AND SPOT ELEVATIONS ARE SHOWN TO FINISH GRADE UNLESS OTHERWISE NOTED.
- PROPOSED ELEVATIONS SHOWN TYPICALLY AS 24.1 OR 24 SHALL BE UNDERSTOOD TO MEAN 824.1 OR 824.
- SPOT ELEVATIONS SHOWN IN PARKING LOTS, DRIVES AND ROADS INDICATE GUTTER GRADES, UNLESS NOTED OTHERWISE WITH LABELS OUTSIDE THE BUILDING PERIMETER. SPOT ELEVATIONS WITH LABELS OUTSIDE THE BUILDING PERIMETER INDICATE PROPOSED FINISH FLOOR ELEVATIONS.
- THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR DETERMINING QUANTITIES OF CUT, FILL AND WASTE MATERIALS TO BE HANDLED, AND FOR AMOUNT OF GRADING TO BE DONE IN ORDER TO COMPLETELY PERFORM ALL WORK INDICATED ON THE DRAWINGS. IMPORT SUITABLE MATERIAL AND EXPORT UNSUITABLE / EXCESS / WASTE MATERIAL AS REQUIRED. ALL COSTS ASSOCIATED WITH IMPORTING AND EXPORTING MATERIALS SHALL BE INCIDENTAL TO THE CONTRACT.
- NO FINISHED SLOPES SHALL EXCEED 4' HORIZONTAL TO 1' VERTICAL (4:1), UNLESS OTHERWISE NOTED.
- ALL DISTURBED AREAS OUTSIDE THE BUILDING PAD WHICH ARE NOT DESIGNATED TO BE PAVED SHALL RECEIVE AT LEAST 6" OF TOPSOIL AND SHALL BE SODDED. REFER TO SHEET 14.11, LANDSCAPING PLAN, FOR SOD LOCATIONS.
- WHERE NEW SOD MEETS EXISTING SOD, EXISTING SOD EDGE SHALL BE CUT TO ALLOW FOR A CONSISTENT, UNIFORM STRAIGHT EDGE. JAGGED OR UNEVEN EDGES WILL NOT BE ACCEPTABLE. REMOVE TOPSOIL AT JOINT BETWEEN EXISTING AND NEW AS REQUIRED TO ALLOW NEW SOD SURFACE TO BE FLUSH WITH EXISTING.
- FAILURE OF TURF DEVELOPMENT: IN THE EVENT THE CONTRACTOR FAILS TO PROVIDE AN ACCEPTABLE TURF, THE CONTRACTOR SHALL RE-SOD ALL APPLICABLE AREAS, AT NO ADDITIONAL COST TO THE OWNER, TO THE SATISFACTION OF THE ENGINEER.
- ANY MANHOLE, CATCH BASIN, STORM SEWER, SANITARY SEWER, DRAIN TILE OR OTHER POTENTIAL SOURCE FOR CONTAMINATION SHALL BE INSTALLED AT LEAST 10 FEET HORIZONTALLY FROM ANY WATERMAIN PER MINNESOTA PLUMBING CODE. THIS ISOLATION DISTANCE SHALL BE MEASURED FROM THE OUTER EDGE OF THE PIPE TO THE OUTER EDGE OF THE CONTAMINATION SOURCE (OUTER EDGE OF STRUCTURES OR PIPING OR SIMILAR).
- LOCATE ALL EXISTING UTILITIES, VERIFY LOCATION, SIZE AND ELEVATIONS OF SAME BEFORE BEGINNING CONSTRUCTION.
- CONTRACTOR SHALL MAINTAIN DRAINAGE FROM EXISTING BUILDING AT ALL TIMES. PROVIDE TEMPORARY STORM SEWER (INCLUDING, BUT NOT LIMITED TO, CATCH BASINS, MANHOLES, PIPING, ETC.) AS REQUIRED. EXISTING STORM SEWER SHALL NOT BE REMOVED UNTIL TEMPORARY OR PERMANENT STORM SEWER IS INSTALLED AND FUNCTIONAL. COORDINATE ALL REMOVALS WITH APPROPRIATE TRADES (SITE UTILITY CONTRACTOR, MECHANICAL CONTRACTOR, ETC.) AS REQUIRED.

LEGEND

- REFERENCE KEY TO SITE DETAILS
DETAIL ID NUMBER (TOP)
DETAIL SHEET NUMBER (BOTTOM)
- EXISTING CONTOUR
- EXISTING SPOT ELEVATION
- PROPOSED CONTOUR
- PROPOSED SPOT ELEVATION
ME = MATCH EXISTING
EOF = EMERGENCY OVERFLOW
- PROPOSED GRADING LIMITS
- PROPOSED SAND SUBBASE AT FROST FOOTED STOOPS
- APPROXIMATE SOIL BORING LOCATION
- PROPOSED MANHOLE (MH)
- PROPOSED CATCH BASIN (CB)
- PROPOSED HYDRANT (HYD)
- PROPOSED GATE VALVE (GV)
- PROPOSED BUILDING STOOP - REFER TO ARCHITECTURAL PLANS
- PROPERTY LINE

GEOTECHNICAL TABLE

REFER TO SPEC 31 00 00 EARTHWORK AND UNIT PRICES
NOTE: DEPTHS LISTED IN TABLE BELOW DO NOT INCLUDE REMOVAL OF SUITABLE SOIL REQUIRED TO MEET PROPOSED GRADES.

BORING	GROUND SURFACE ELEVATION (ft)	ANTICIPATED DEPTH OF EXCAVATION (ft)	APPROXIMATE BOTTOM ELEVATION (ft)	APPROXIMATE DEPTH BELOW FLOOR ELEVATION 824 (ft)
ST-1	823.5	9.0	814.5	9.5
ST-2	823.9	12.0	811.9	12.5
ST-3	824.2	7.5	816.7	7.7
ST-4	824.2	4.5	819.7	4.5
ST-5	826.4	5.0	821.0	3
ST-8	825.0	4.5	820.5	3.5
ST-9	823.6	14.5	809.1	15
ST-10	823.8	11.0	812.8	11.5
ST-11	823.5	13.5	810.0	14
ST-12	823.1	7.0	816.0	8
ST-13	823.1	9.5	813.5	10.5
ST-14	822.7	9.0	813.5	10.5

BENCHMARKS (FIELD VERIFY BEFORE USING)

- Top nut of a fire hydrant located roughly sixty feet northerly of western most building corner of current Police station wing.
Elevation = 825.22 (NAVD88)
- Top nut of a fire hydrant located along Easterly Logan Ave Right of Way, just south of the second driveway North of W. Old Shakopee Rd.
Elevation = 831.85 (NAVD88)
- Top nut of a fire hydrant located along easterly Logan Ave. Right of Way, just North of third driveway North of W. Old Shakopee Rd.
Elevation = 834.70 (NAVD88)

AGENCY REVIEW SET
NOT FOR CONSTRUCTION



PROPERTY SERVICES DEPARTMENT
Consultants:



WOLD ARCHITECTS
AND ENGINEERS
332 Minnesota Street, Suite 7000
Saint Paul, MN 55101

wold.com | 651.227.7773




LANDSCAPE ARCHITECTURE • SITE PLANNING • CIVIL ENGINEERING
REGISTERED PROFESSIONALS
MINNESOTA LICENSE NO. 0000000000

Registration:
I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly registered Professional Engineer under the laws of the State of Minnesota.

DATED: A. REY
Registration Number: 40180 Date: 06/20/17
CAD Date:

Key Plan:



No.	Revisions	Date

Project Title:

HENNEPIN COUNTY
SOUTH SUBURBAN
COURT RELOCATION

Facility Name (No.) & Address
BLOOMINGTON CIVIC PLAZA
1800 W. OLD SHAKOPEE RD
BLOOMINGTON, MN 55431


Scale: 1" = 20'

GRADING AND
DRAINAGE PLAN

162150
Drawing No.:
DD
Date: 03/17/17
C1.41

MN

C

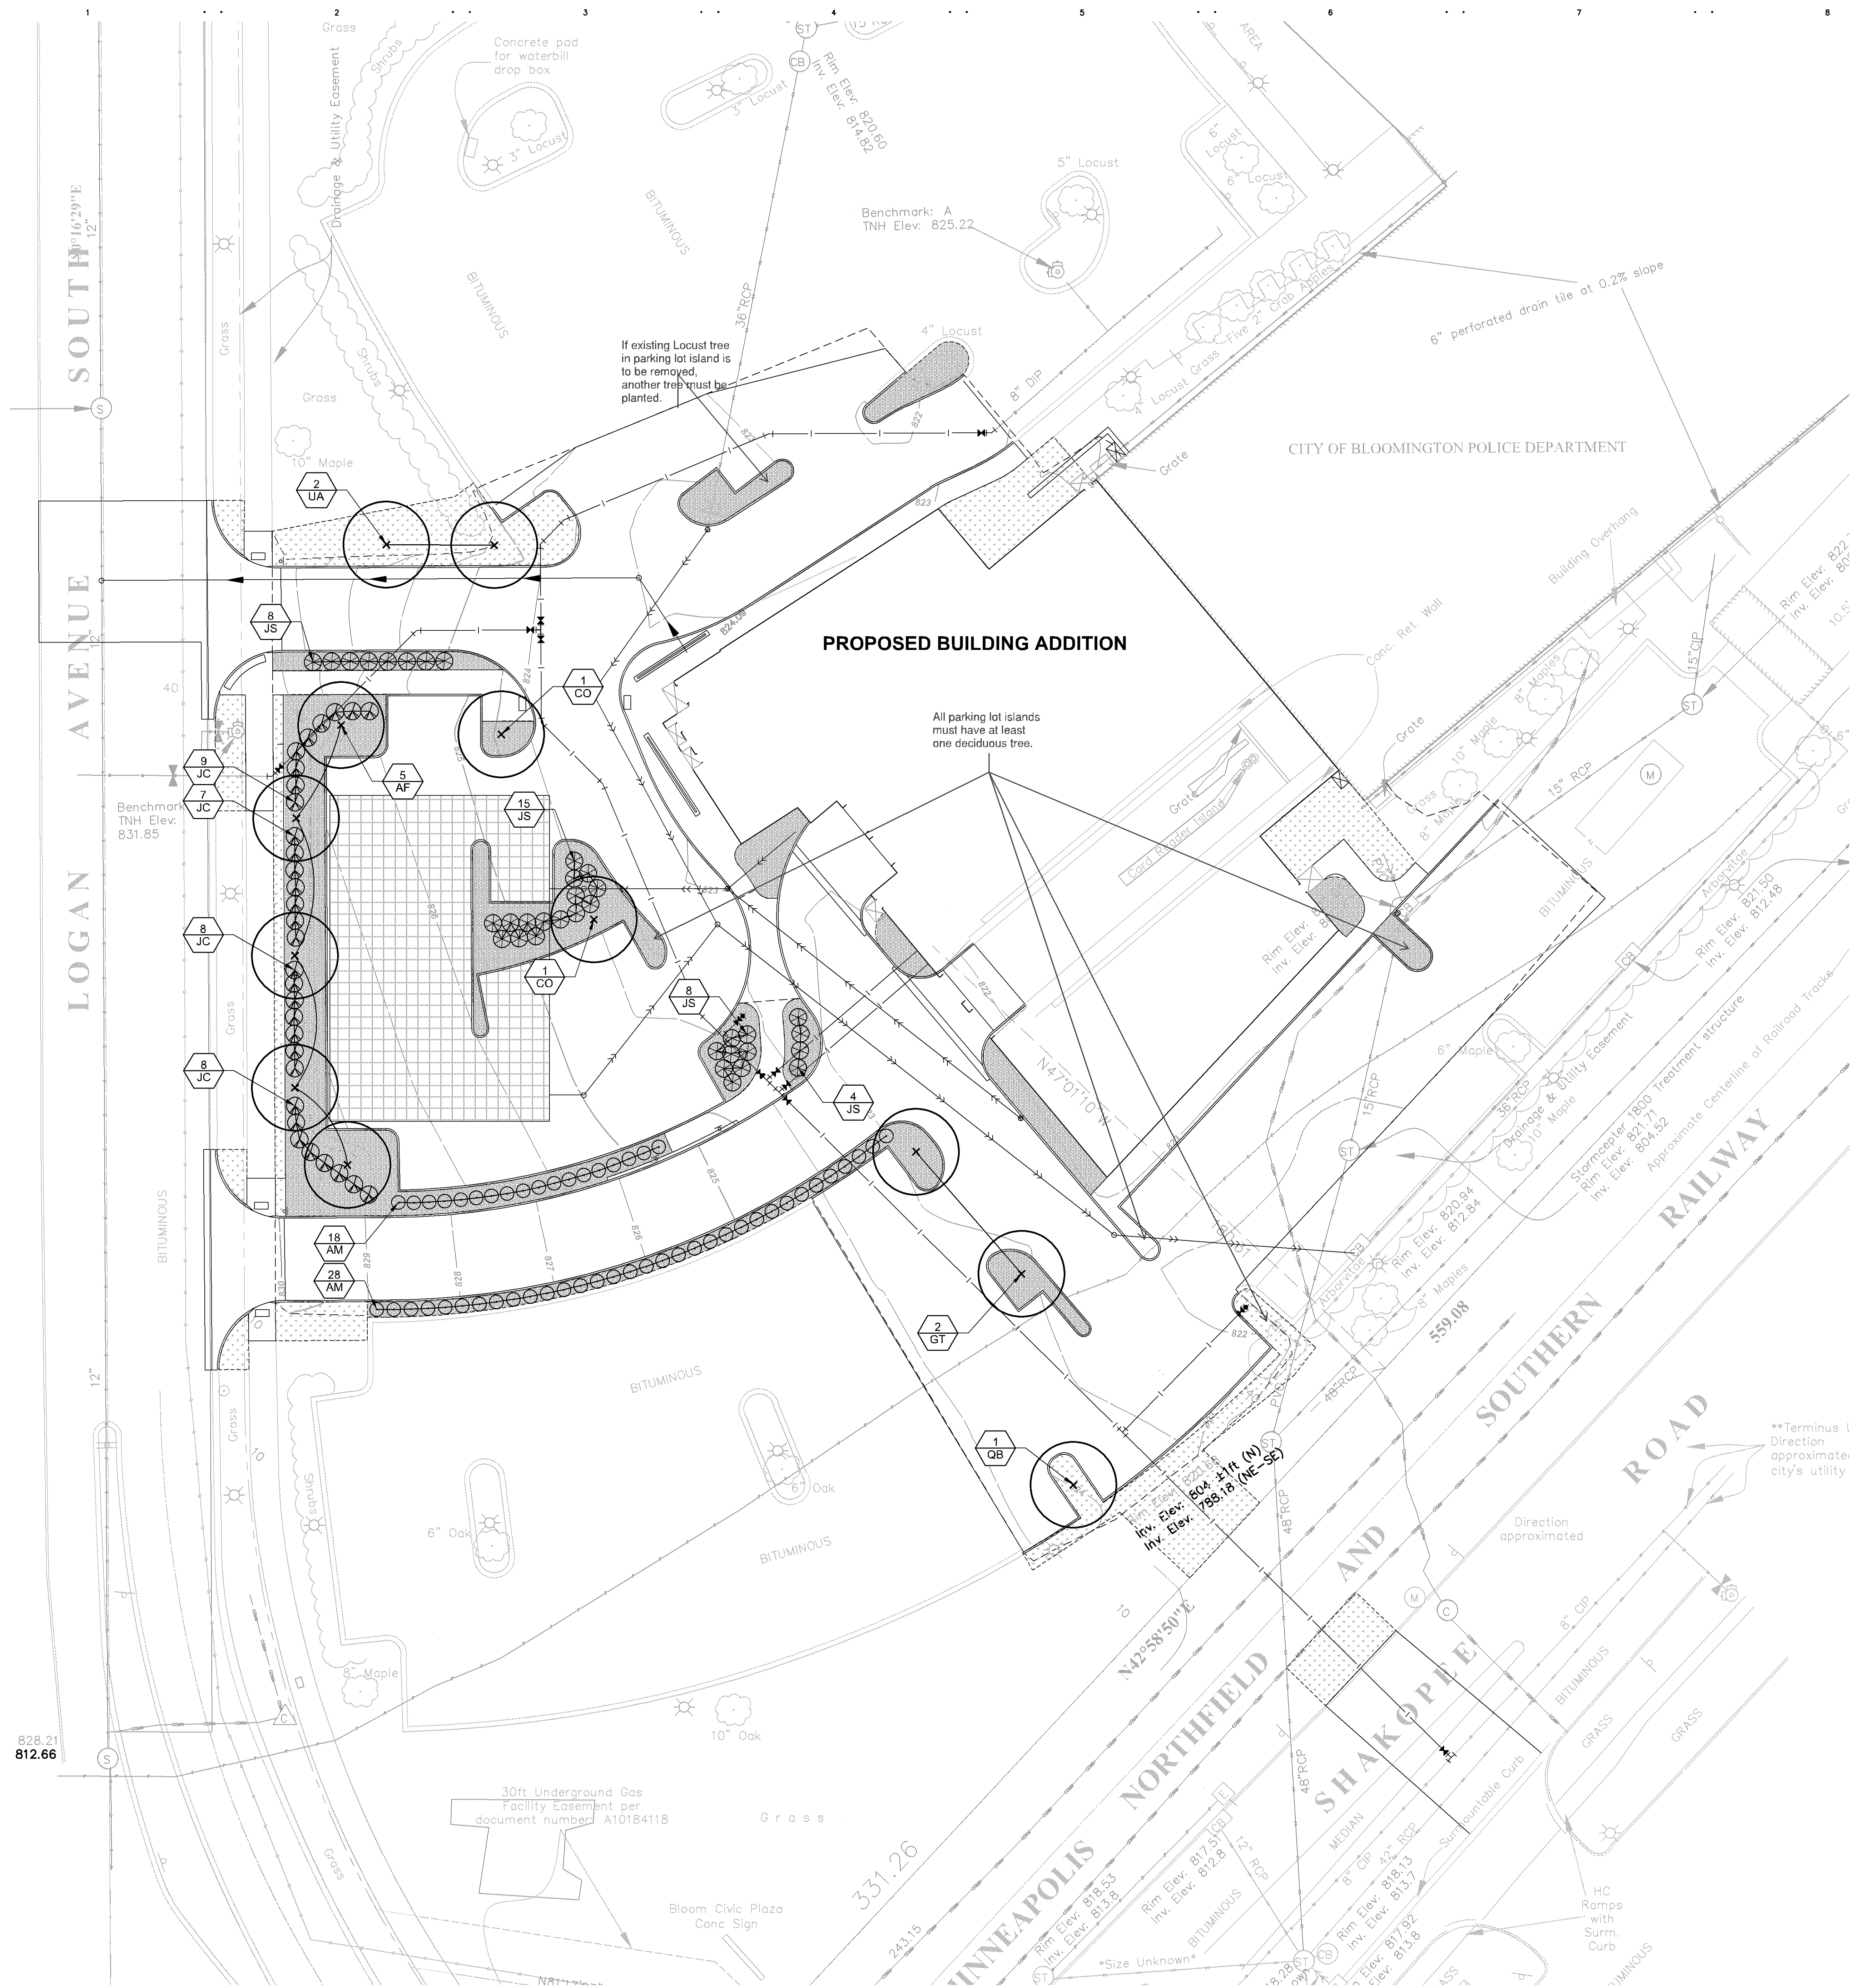

NOTES:

1. REFER TO SHEET C1.11, GRADING AND DRAINAGE PLAN, FOR GENERAL NOTES.
2. REFER TO SWPPP NARRATIVE FOR CONSTRUCTION SEQUENCING AND EROSION CONTROL REQUIREMENTS.
3. LANDSCAPE ARCHITECT MUST INSPECT AND APPROVE FINISH GRADING BEFORE CONTRACTOR PROCEEDS WITH SODDING AND SEEDING.
4. ALL DISTURBED AREAS OUTSIDE THE BUILDING PAD WHICH ARE NOT DESIGNATED TO BE PAVED OR RECEIVE AGLIME SHALL RECEIVE AT LEAST 6" OF TOPSOIL AND SHALL BE SODDED OR SEEDED.
5. WHERE NEW SOD MEETS EXISTING TURF, EXISTING TURF EDGE SHALL BE CUT TO ALLOW FOR A CONSISTENT, UNIFORM STRAIGHT EDGE. JAGGED OR UNEVEN EDGES WILL NOT BE ACCEPTABLE. REMOVE TOPSOIL AT JOINT BETWEEN EXISTING AND NEW AS REQUIRED TO ALLOW NEW SOD SURFACE TO BE FLUSH WITH EXISTING.
6. FAILURE OF TURF DEVELOPMENT: IN THE EVENT THE CONTRACTOR FAILS TO PROVIDE AN ACCEPTABLE TURF, THE CONTRACTOR SHALL RE-SOD OR RE-SEED ALL APPLICABLE AREAS, AT NO ADDITIONAL COST TO THE OWNER, TO THE SATISFACTION OF THE ENGINEER.
7. BEGIN TURF ESTABLISHMENT IMMEDIATELY AFTER SODDING OR SEEDING, REFER TO SPECIFICATION FOR PROCEDURE.
8. ALL TREES TO BE BALLED AND BURLAPPED.
9. ALL TREES AND SHRUBS SHALL RECEIVE 4" DEPTH OF CLEAN SHREDDED HARDWOOD MULCH, UNLESS OTHERWISE SPECIFIED.
10. ALL PLANT MATERIALS SHALL BE NO. 1 QUALITY, NURSERY GROWN AND SPECIMENS MUST BE MATCHED. ALL OVERSTORY TREES ADJACENT TO DRIVE AND IN PARKING LOT SHALL BEGIN BRANCHING NO LOWER THAN 6'.

LEGEND

- REFERENCE KEY TO SITE DETAILS
DETAIL ID NUMBER (TOP)
DETAIL SHEET NUMBER (BOTTOM)
- PROPOSED DECIDUOUS TREE
- PROPOSED CONIFEROUS TREE
- PROPOSED SHRUBS
- PROPOSED HERBACEOUS PLANTS
- APPROXIMATE SOD LIMITS
- PROPOSED SEED MIX #1
- PROPOSED SEED MIX #2
- PROPOSED NATIVE SEEDING
- PROPOSED SHRUB / MULCH BED
- PROPOSED LANDSCAPE ROCK BED
- PROPOSED LIGHT POLE - REFER TO ELECTRICAL PLANS
- PROPERTY LINE

SITE STATISTICS:

DISTURBED AREA - 83,338 SQ FT
DEVELOPABLE LANDSCAPING AREA PORTION OF DISTURBED AREA - 10,379 SQ FT


REQUIRED TREES - 5
REQUIRED SHRUBS - 11

PLANT SCHEDULE

SYMBOL	COMMON NAME	SCIENTIFIC NAME	QTY.	SIZE	ROOT
DECIDUOUS SHADE TREES					
AF	FIREBALL MAPLE	Acer x freemanii 'AF#1'	5	2-1/2" cal	B&B
CO	HACKBERRY	Celtis occidentalis	2	2-1/2" cal	B&B
GT	SKYLINE HONEYLOCUST	Gleditsia triacanthos 'Skycole'	2	2-1/2" cal	B&B
QB	SWAMP WHITE OAK	Quercus bicolor	1	2-1/2" cal	B&B
UA	PRINCETON ELM	Ulmus americana 'Princeton'	2	2-1/2" cal	B&B
DECIDUOUS SHRUBS					
AM	IRIDIOLIS BEAUTY CHOKEBERRY	Aronia melanocarpa 'Morton'	48	#5	Cont.
CONIFEROUS SHRUBS					
JC	MANEY JUNIPER	Juniperus chinensis 'Maney'	32	#5	Cont.
JS	BUFFALO JUNIPER	Juniperus sabina 'Buffalo'	35	#5	Cont.




PROPERTY SERVICES DEPARTMENT
Consultants:



WOLD ARCHITECTS
AND ENGINEERS
332 Minnesota Street, Suite 2000
Saint Paul, MN 55101

woldae.com | 651.227.7773

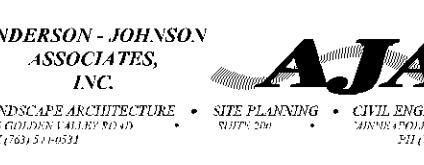

Registration:
I hereby certify that this plan, specification or report
was prepared by me or under my direct supervision
and that I am a duly registered Professional Engineer
under the laws of the State of Minnesota.

DATE A. REV.
Registration Number 40180 Date 06/30/17
CAD Date:

Key Plan:



No.	Revisions	Date

Project Title:

HENNEPIN COUNTY
SOUTH SUBURBAN
COURT RELOCATION

Facility Name (No.) & Address
BLOOMINGTON CIVIC PLAZA
1800 W. OLD SHAKOPEE RD
BLOOMINGTON, MN 55431

Scale: 1" = 20'
Drawing No.:
Date: 03/17/17

LANDSCAPING PLAN

182150
MLB
DAR
DD
L1.11


AGENCY REVIEW SET
NOT FOR CONSTRUCTION

THRUST BLOCK

AGENCY REVIEW SET
NOT FOR CONSTRUCTION

MN

A

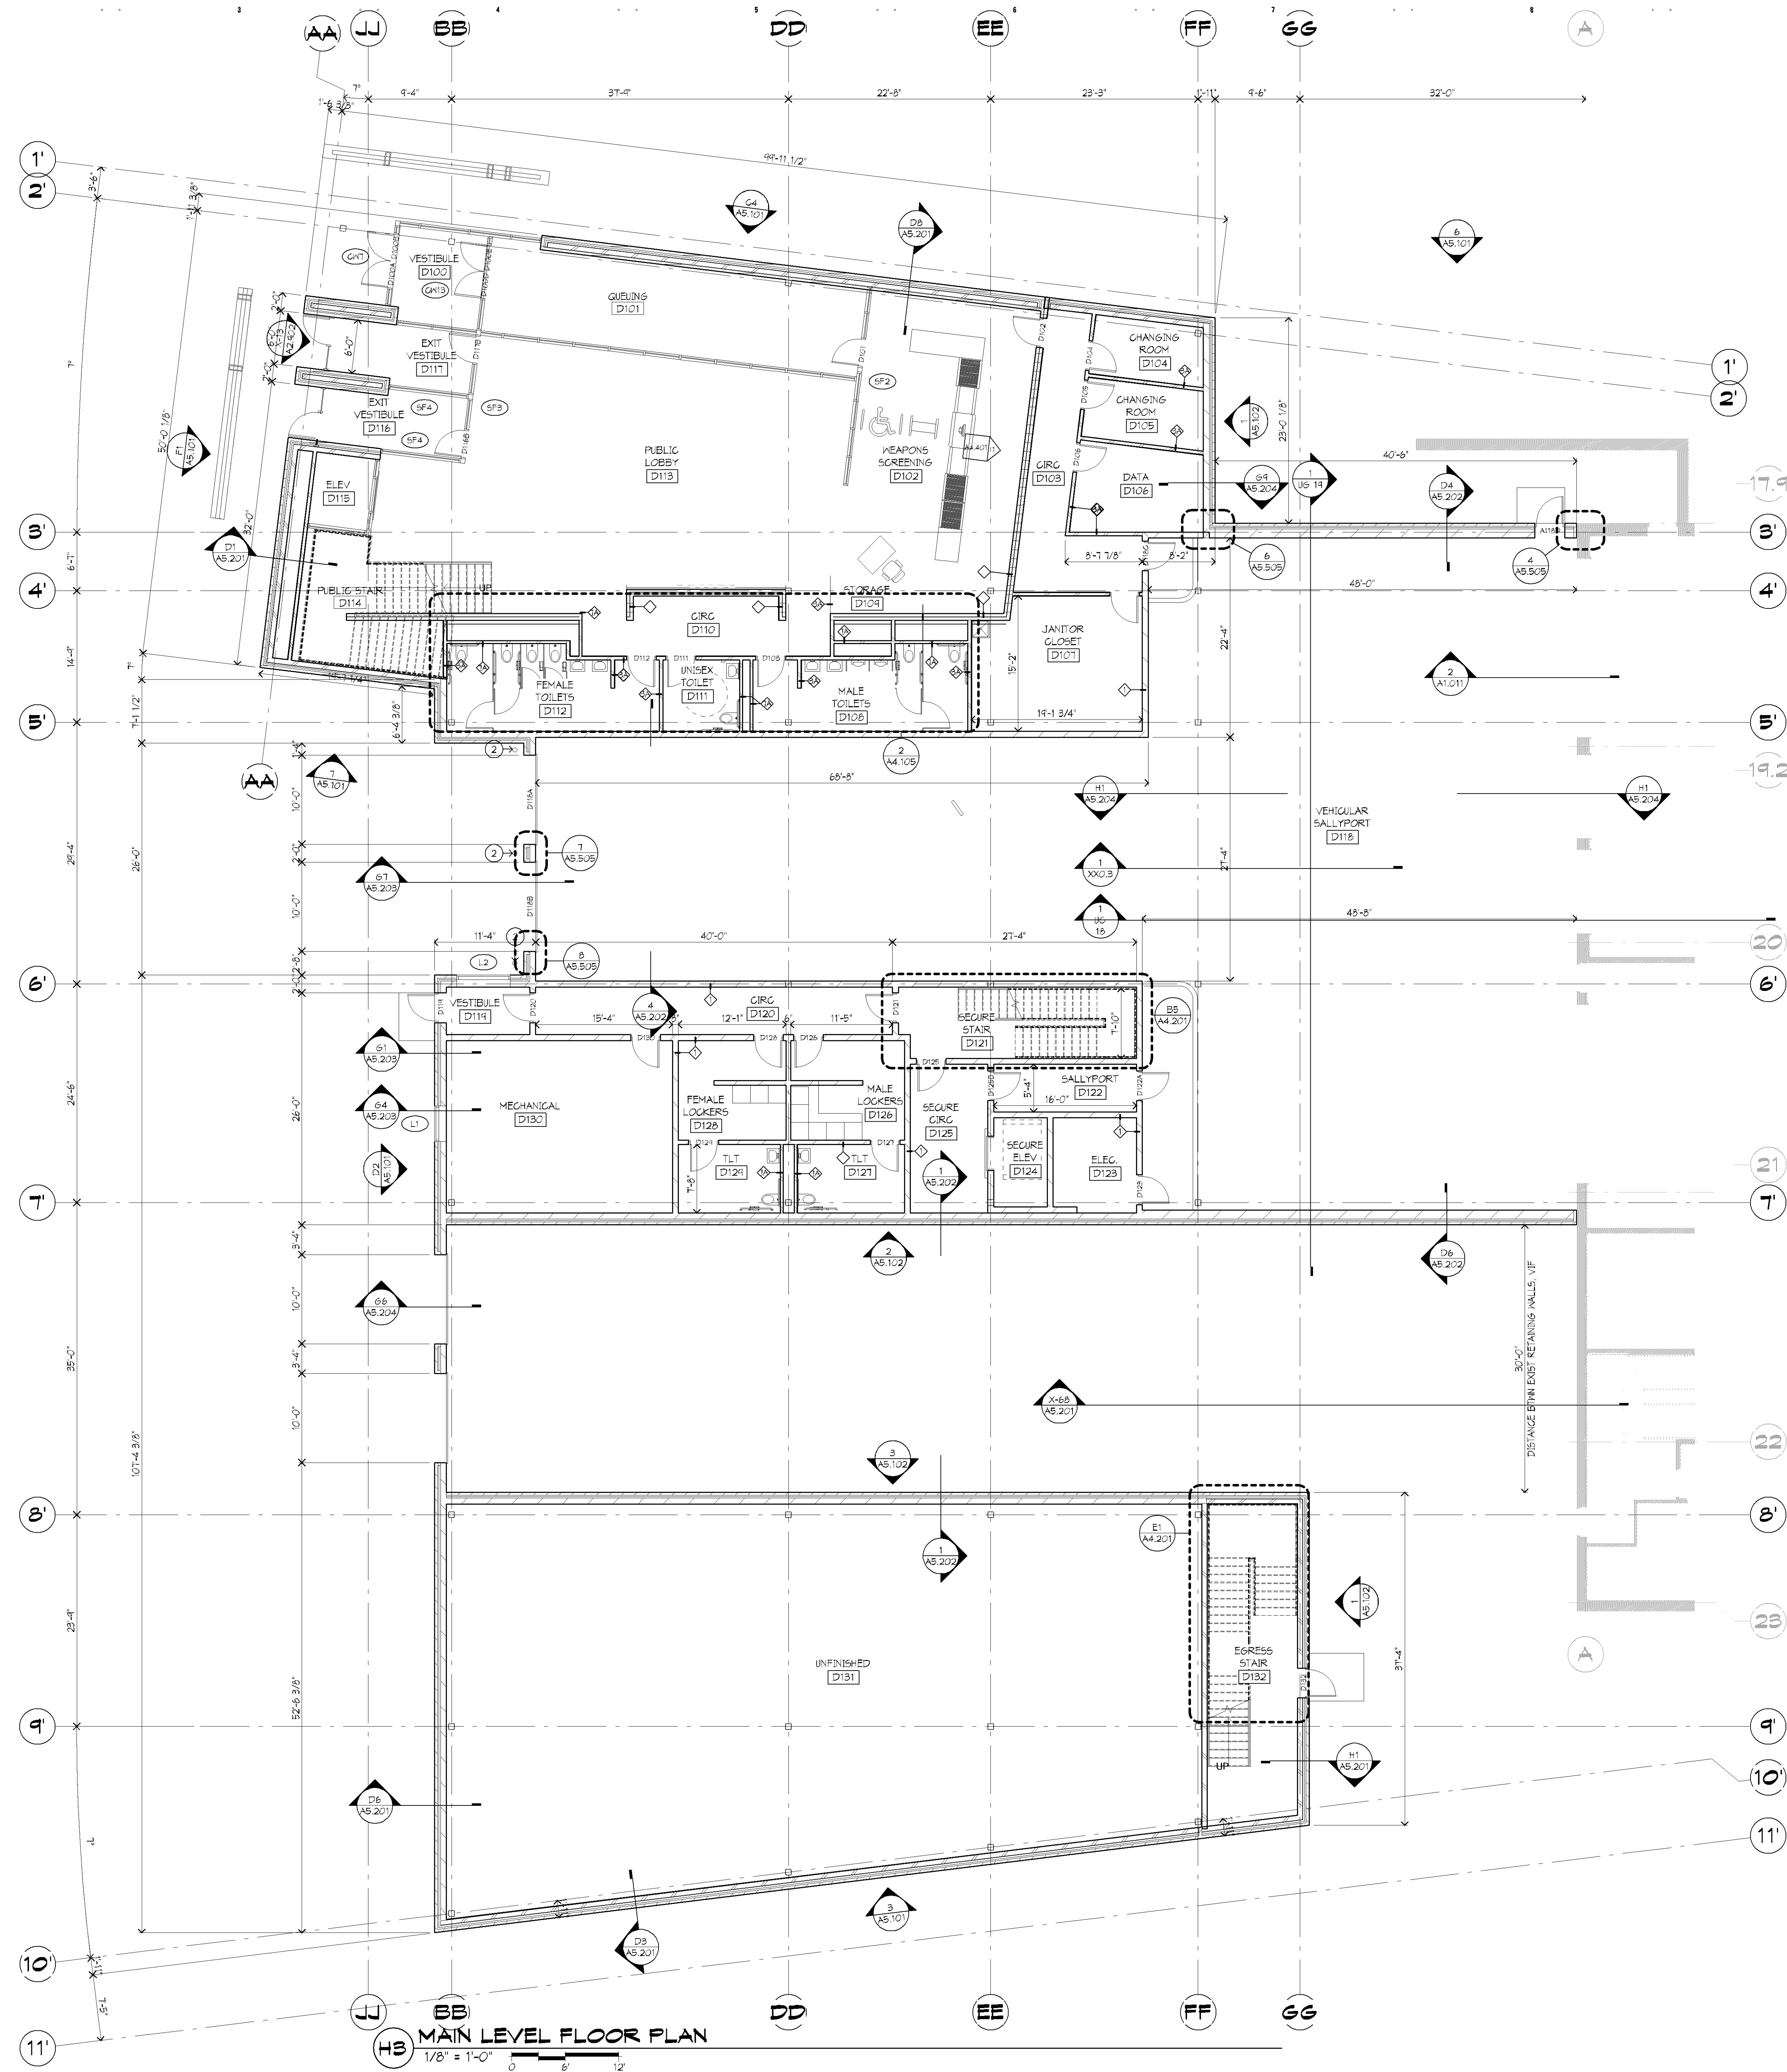


FLOOR PLAN GENERAL NOTES:


1. REFER TO DETAILS OF CONSTRUCTION FOR:
A. ABBREVIATIONS, MATERIAL SYMBOLS
B. MOUNTING HEIGHTS
C. LINTEL SCHEDULE
D. MATERIAL FINISH/COLOR SCHEDULE
E. WALL TYPES
F. MARKER BD TYPES AND MOUNTING HTS
THE ABOVE SECTIONS ARE LISTED FOR REFERENCE ONLY, AND ARE NOT EXCLUSIVE TO AREAS OF WORK. ALL DETAILS SHALL BE REVIEWED FOR SCOPE OF WORK.
2. ALL PLAN DIMENSIONS ARE NOMINAL TO FACE OF WALL. WALL THICKNESSES ARE SHOWN NOMINAL. SEE WALL TYPES FOR ACTUAL THICKNESSES.
3. ALL GYP WALLS ARE TO BE 5 INCHES THICK UNLESS OTHERWISE NOTED.
4. ALL CONCRETE BLOCK WALLS ARE TO BE 8 INCHES THICK UNLESS OTHERWISE NOTED.
5. COORDINATE SIZE AND LOCATION OF ALL DUCT AND SHAFT OPENINGS IN WALLS AND FLOORS W/ MECH. AND ELEC. PROVIDE ALL REQUIRED LINTELS FOR OPENINGS. SEE LINTEL SCHEDULE.
6. FIELD VERIFY ALL MILLWORK OPENINGS. SET FLOOR DRAINS 3/4" BELOW FINISHED CONCRETE FLOORS UNLESS OTHERWISE NOTED. PROVIDE CONSISTENT SLOPE FROM WALL TO DRAIN BY SLOPING CONCRETE, MIN. 1/4" PER FOOT.
7. VERIFY LOCATION, SIZE AND QUANTITY OF ALL MECHANICAL AND ELECTRICAL EQUIPMENT PADS.
8. ALL DOOR/SIDELITE OPENINGS TO BEGIN 4" FROM ADJACENT WALL UNLESS OTHERWISE NOTED.
10. ALL GYP WALLS ARE CENTERED ON GRID UNLESS OTHERWISE NOTED.
11. FIRE RATED WALLS ARE INDICATED ON CODE PLANS.
12. HEAVY LINE THIS
INDICATES BUILDING MATCH LINE

FLOOR PLAN KEY NOTES:

1. DOOR ACTUATORS
2. BOLLARD - SEE CIVIL FOR MORE INFORMATION.
3. TUB SINK - SEE MECHANICAL
4. CAN WASH - SEE DETAIL 43010.
5. EMERGENCY EYE WASH - SEE MECH.
6. CABINET UNIT HEATER - SEE DETAIL 43046. SEE MECH. FOR SPECIFICATIONS, COORDINATE LOCATION WITH MECH.
7. SALVAGED LOCKERS TO BE INSTALLED BY CONTRACTOR.
8. LOCATION OF SEMI-RECESSED DEBRILLATOR CABINET - SEE DETAIL B/43004.
9. LOCATION OF STACKED WASHER AND DRYER (N.I.C.)
10. SQUARE BRICK ACCENT - SEE ELEVATIONS/ SECTIONS FOR ADDITIONAL INFORMATION



Project Name	Project No.	Issue Date
Hennepin County South Suburban Court Relocation	1800 W. Old Shakopee Rd	1/1/2018

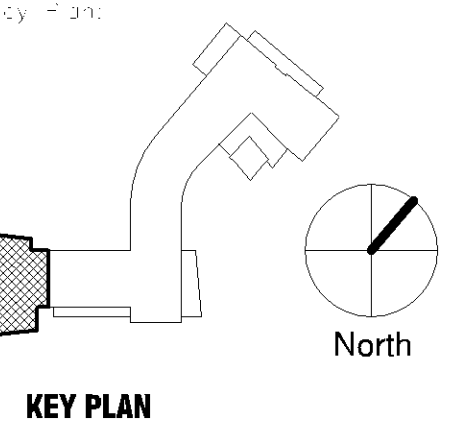

Rev.	Description	Date
1	Issue	1/1/2018

Project No. 1800 W. Old Shakopee Rd

HENNEPIN COUNTY
SOUTH SUBURBAN
COURT RELOCATION

Location: 1800 W. Old Shakopee Rd
Bloomington Civic Plaza
1800 W. Old Shakopee Rd
Bloomington, MN 55431

Scale: As Shown
Date: 1/1/2018


MAIN LEVEL
FLOOR PLAN

Author	Checker
162/150	162/150
162/150	162/150
162/150	162/150
162/150	162/150

PRE DRG SET
NOT FOR CONSTRUCTION


A2.011

A

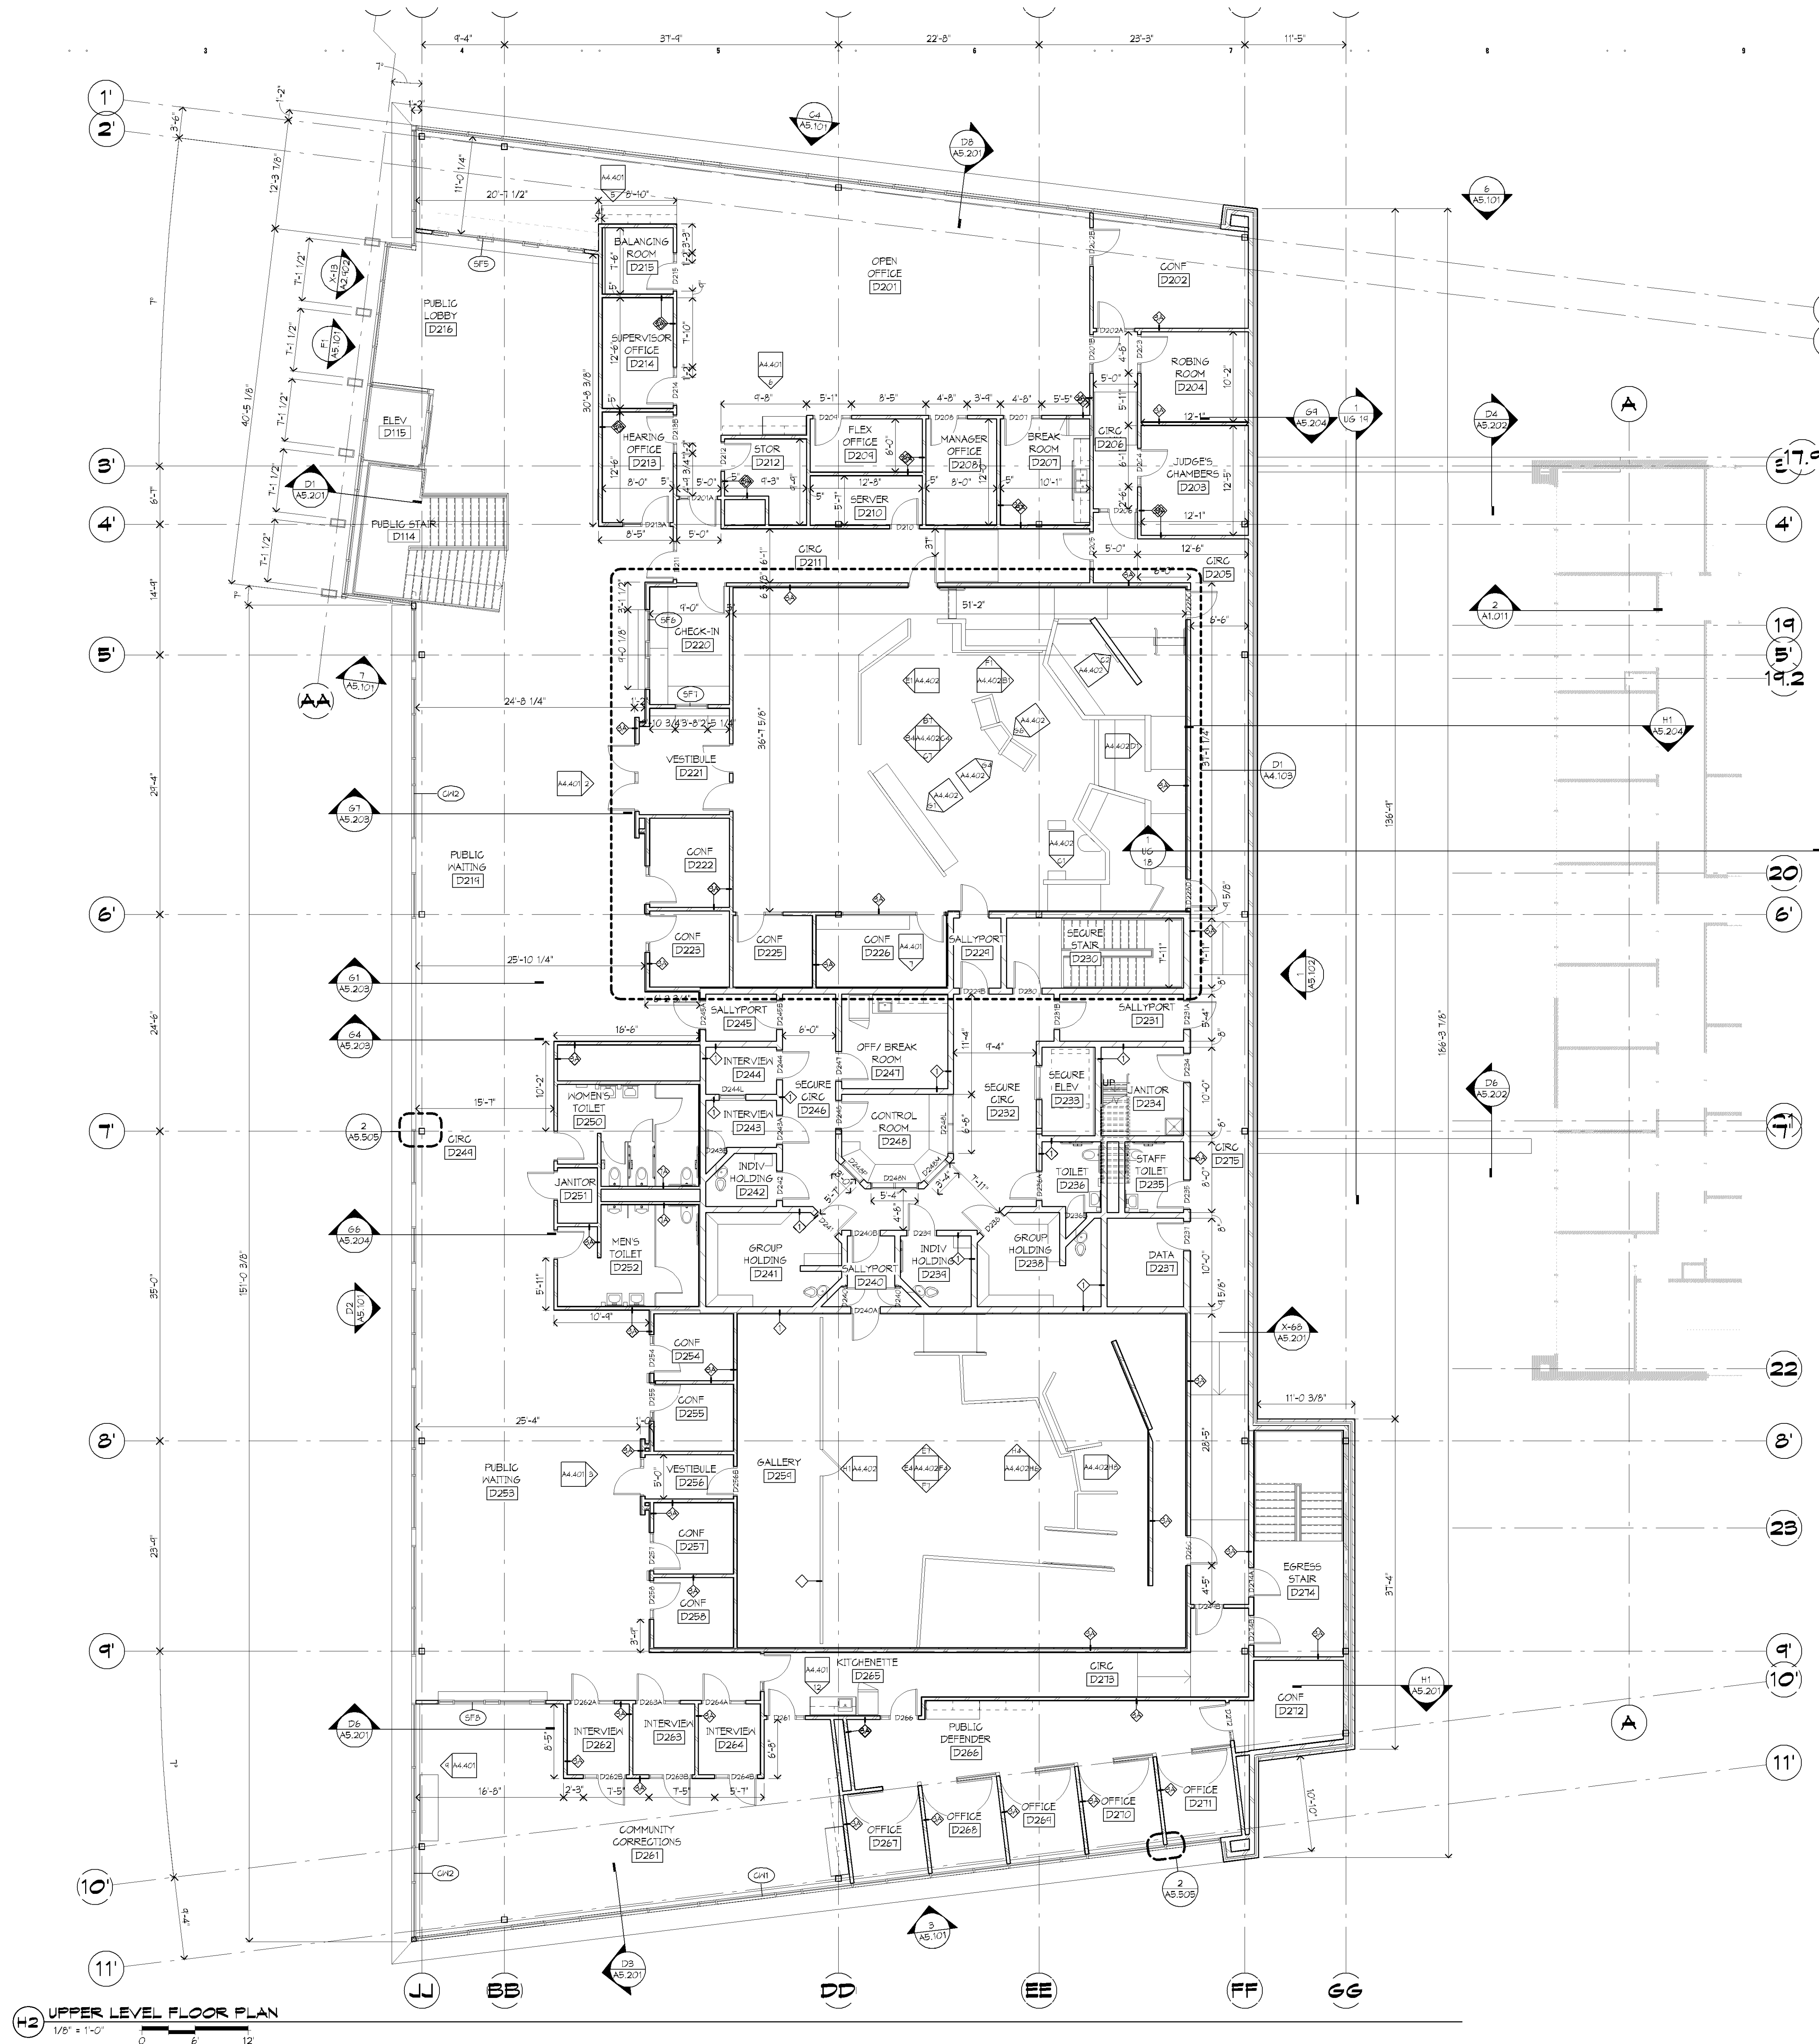


- FLOOR PLAN KEY NOTES:**
- 1 DOOR ACTUATORS
 - 2 BOLLARD. SEE CIVIL FOR MORE INFORMATION.
 - 3 TUB SINK - SEE MECHANICAL
 - 4 GAN WASH - SEE DETAIL 43010.
 - 5 EMERGENCY EYE WASH. SEE MECH.
 - 6 CABINET INT HEATER. SEE DETAIL 43046. SEE MECH. FOR SPECIFICATIONS, COORDINATE LOCATION WITH MECH.
 - 7 SALVAGED LOCKERS TO BE INSTALLED BY CONTRACTOR.
 - 8 LOCATION OF SEMI-ENCLOSED DEFFERILLATOR CABINET
- SEE DETAIL B/43004
 - 9 LOCATION OF STACKED WASHER AND DRYER (N.I.G.)
 - 10 SQUARE BRICK ACCENT - SEE ELEVATIONS/ SECTIONS FOR ADDITIONAL INFORMATION

- ### FLOOR PLAN GENERAL NOTES:
1. REFER TO DETAILS OF CONSTRUCTION FOR:
A. MOVING NOTATIONS AND AURAL SYMBOLS
B. MOUNTING HEIGHTS
C. LINTEL SCHEDULE
D. MOUNTING FINISH/COLOR SCHEDULE
E. WALL TYPES
F. MARKER BD TYPES AND MOUNTING HTS
THESE SECTIONS ARE LISTED FOR REFERENCE ONLY, AND ARE NOT EXCLUSIVE TO AREAS OF WORK. ALL DETAILS MUST BE REVIEWED FOR SCOPE OF WORK.
 2. ALL FLOOR DIMENSIONS ARE MEASURED TO FACE OF WALL. WALL THICKNESSES ARE SHOWN NOMINAL. SEE WALL TYPES FOR ACTUAL THICKNESSES.
 3. ALL 6"Y. WALLS ARE TO BE 5 INCHES THICK UNLESS OTHERWISE NOTED.
 4. ALL 8"CONCRETE BLOCK WALLS ARE TO BE 8 INCHES THICK UNLESS OTHERWISE NOTED.
 5. COORDINATE SIZE AND LOCATION OF ALL DUCT AND SHAFT OPENINGS IN WALLS AND FLOORS TO MECH. AND ELEC. PROVIDE ALL REQUIRED LINTELS FOR OPENINGS. SEE LINTEL SCHEDULE.
 6. FILL IN ALL GAPS AND MILL/WORK FINISHES.
 7. SET FLOOR DRAINS 3/4" BELOW FINISHED CONCRETE FLOORS UNLESS OTHERWISE NOTED. PROVIDE CONCRETE DRAIN TRAYS FROM WALL TO DRAIN BY SLOPING CONCRETE, MIN. 1/4" PER FOOT.
 8. VERIFY LOCATION, SIZE AND QUANTITY OF ALL MECHANICAL AND ELECTRICAL EQUIPMENT PADS.
 9. ALL DOOR/SIDE/LITE OPENINGS TO BEGIN 4" FROM ADJACENT WALL UNLESS OTHERWISE NOTED.
 10. ALL 6"Y. WALLS ARE CENTERED ON GRID LINES UNLESS OTHERWISE NOTED.
 11. FIRE RATED PARTS ARE INDICATED ON CODE PLANS.
 12. HEAVY LINE THIS
- INDICATES DRAWING MATCH LINE



**WOLD ARCHITECTS
AND ENGINEERS**
2 Minnesota Street, Suite W2000
Saint Paul, MN 55101
woldae.com | 651.227.7773

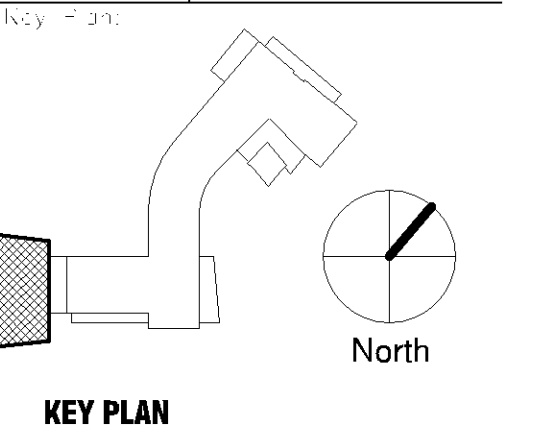[illegible][illegible]

HENNEPIN COUNTY SOUTH SUBURBAN COURT RELOCATION

Bloomington Civic Plaza
1800 W. Old Shakopee Rd
Bloomington, MN 55431

Co. for Project No.	Co. for Contract No.
---------------------	----------------------


UPPER LEVEL FLOOR PLAN

Drawing: Proj. No.: 162150	Drawn: Author	Checked: Checker
Drawing Scale: 1/8" = 1'-0"		
Proj. Name:		
Date: Issue Date		
Drawing No.: A2.021		
Sheet: of		


**PRE DRC SET
NOT FOR CONSTRUCTION**

A2.021


MN

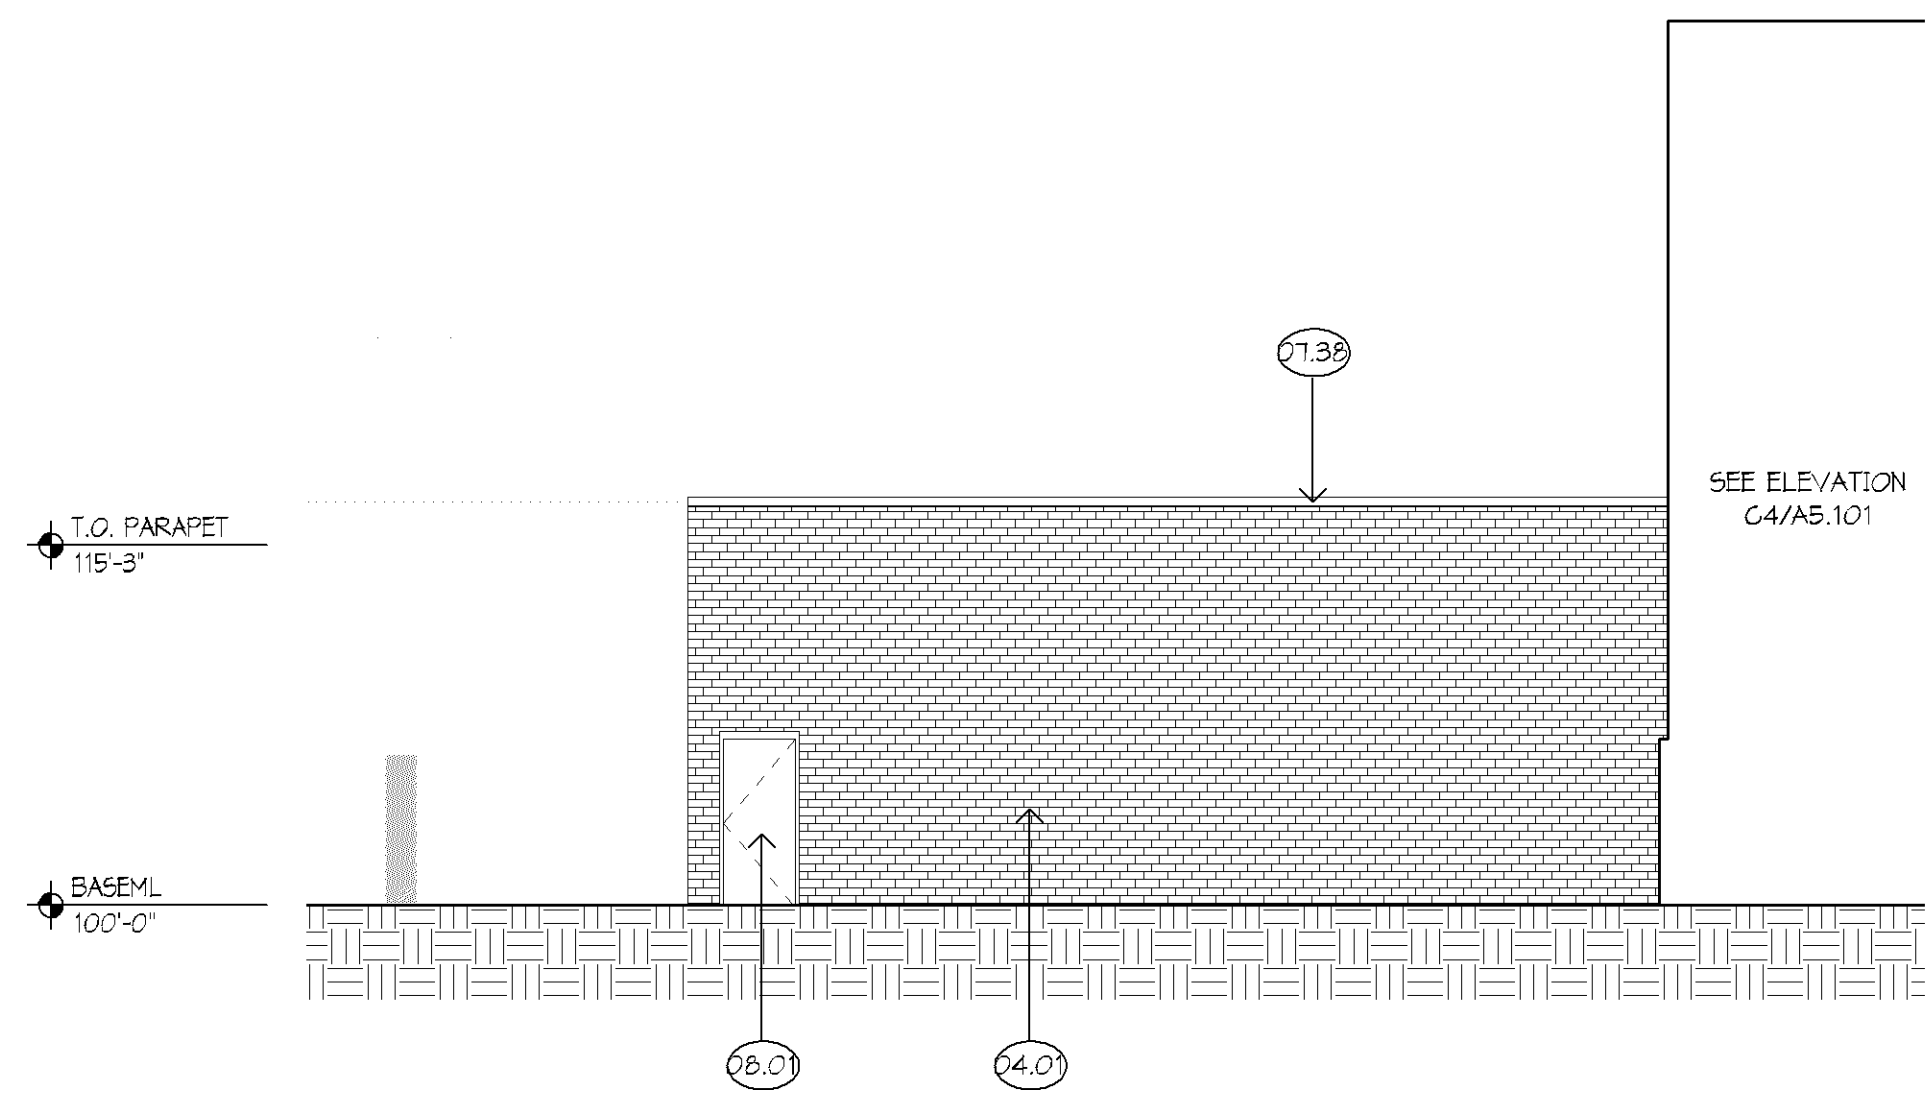


6 NORTH ELEVATION - VEHICULAR SALLYPORT CONNECTION
1/8" = 1'-0"
0 6 12

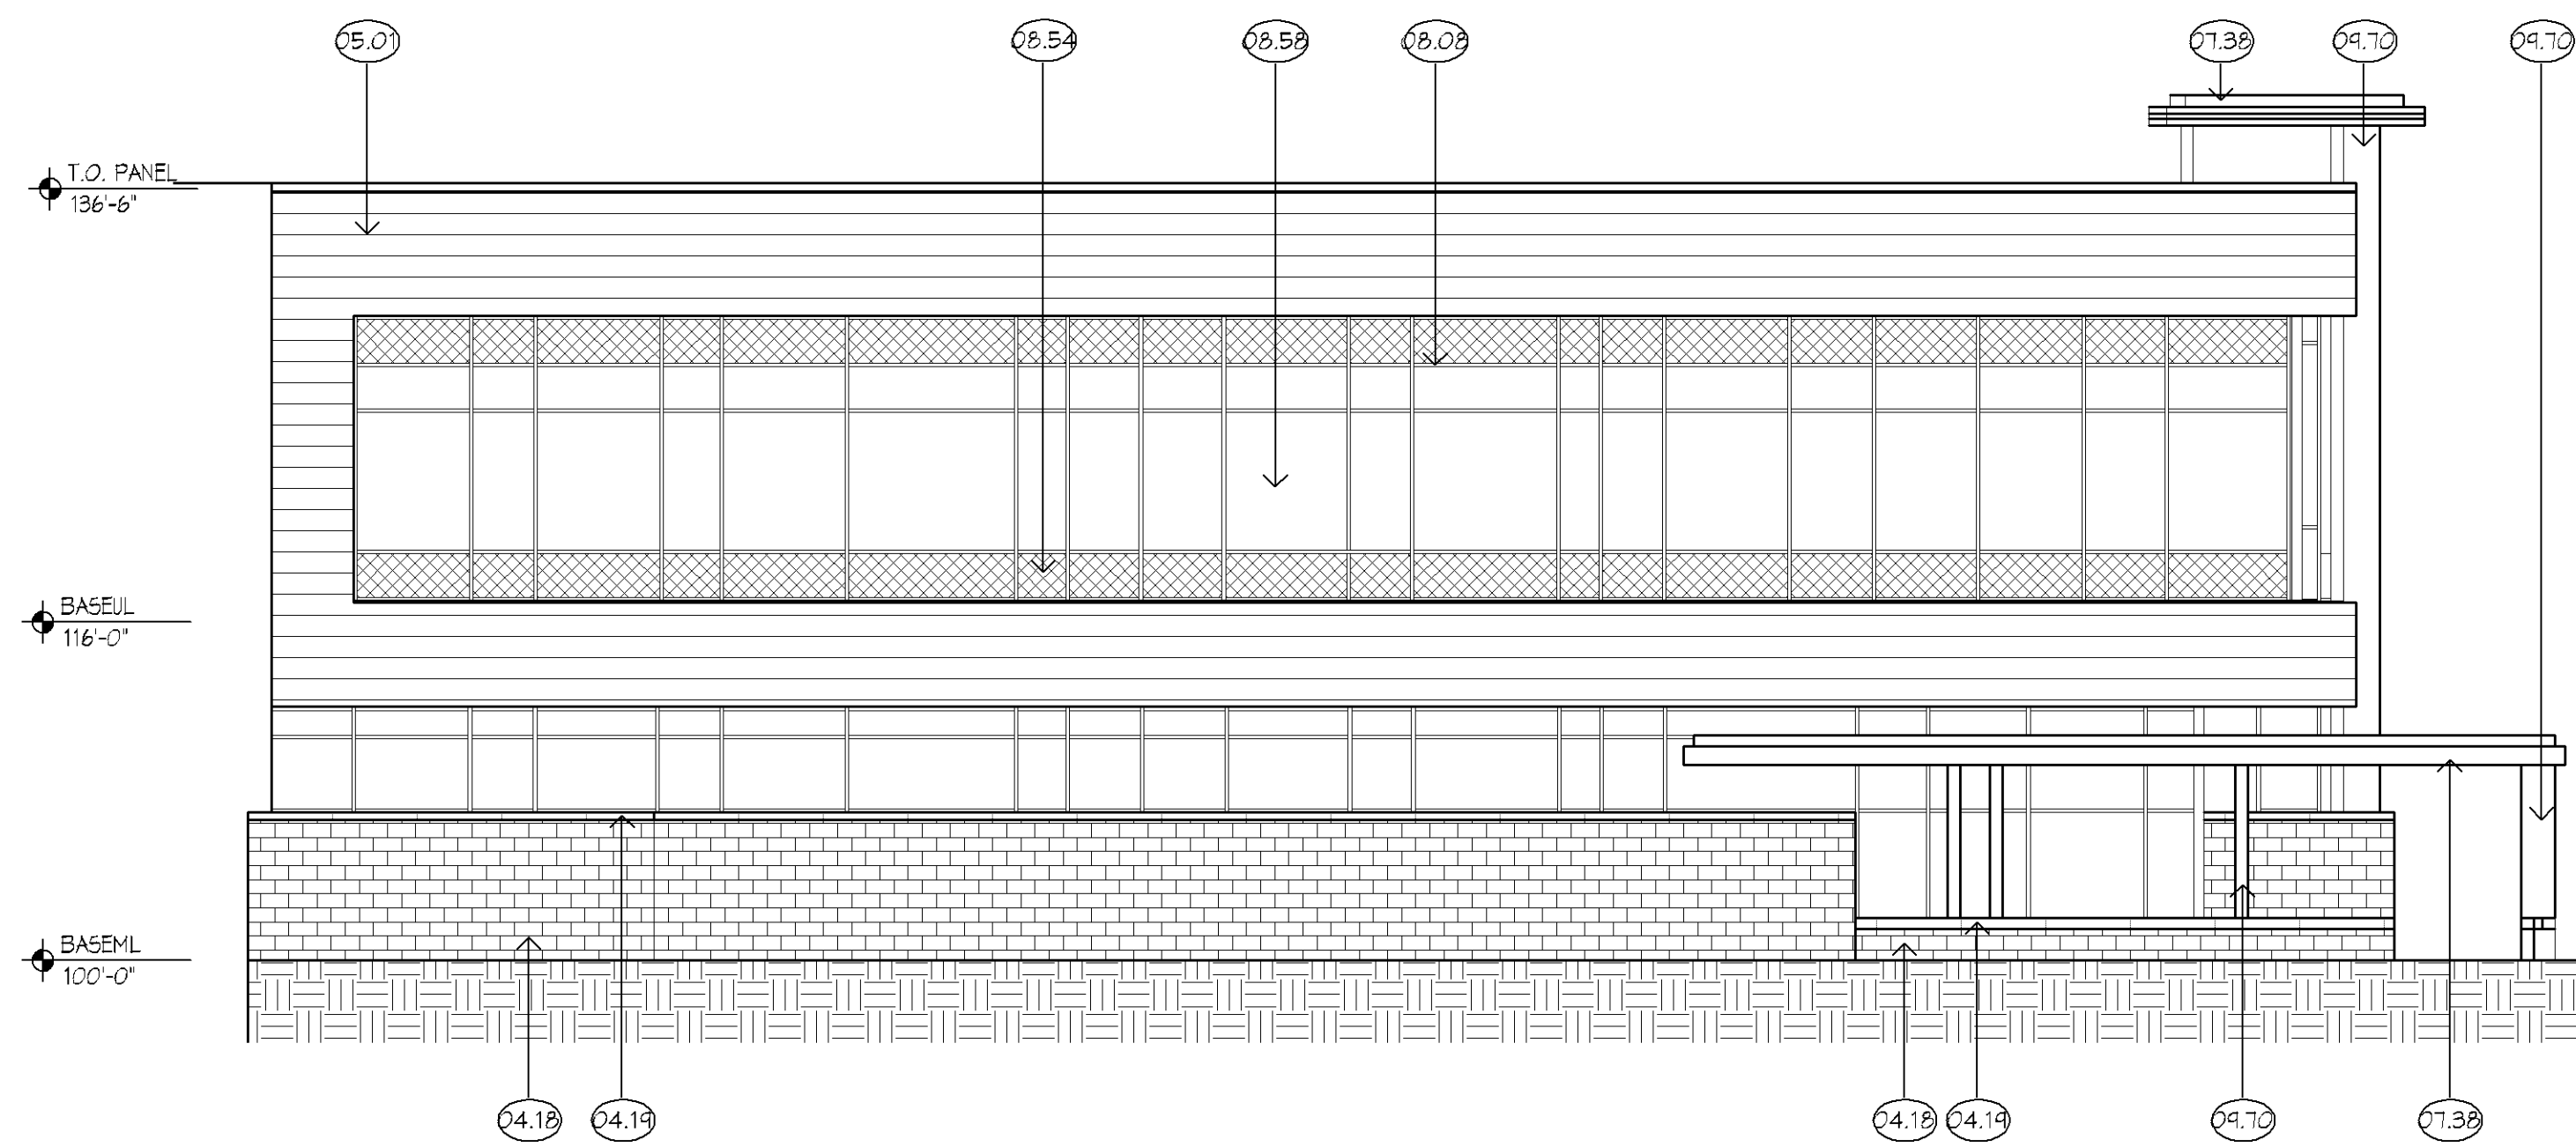


C4 NORTH ELEVATION - MAIN ENTRANCE AND QUEUING
1/8" = 1'-0"
0 6 12

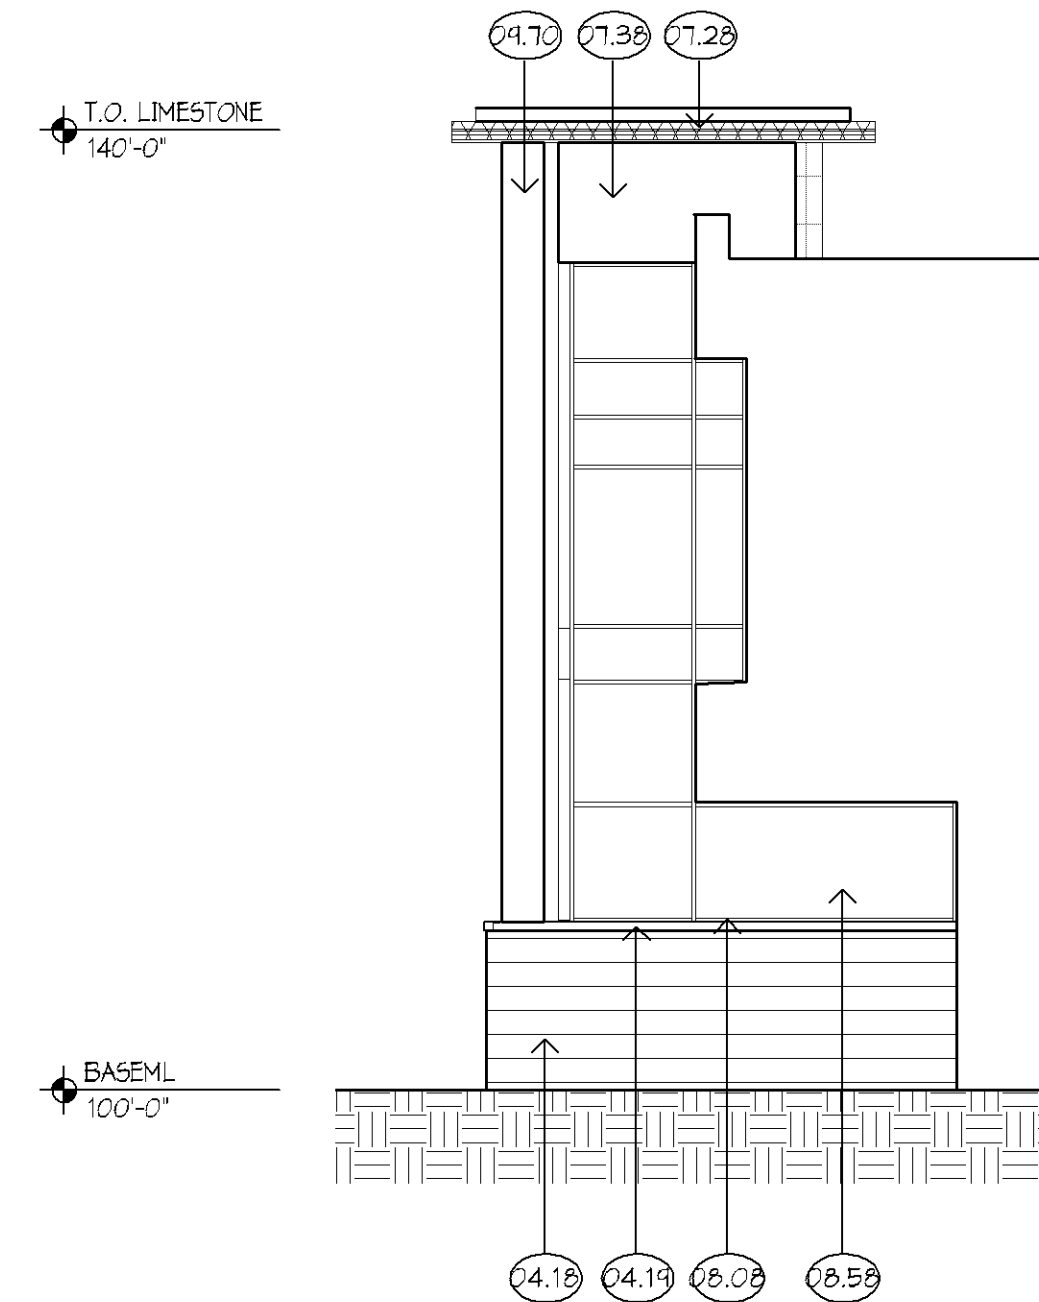


7 SOUTH ELEVATION
1/8" = 1'-0"
0 6 12

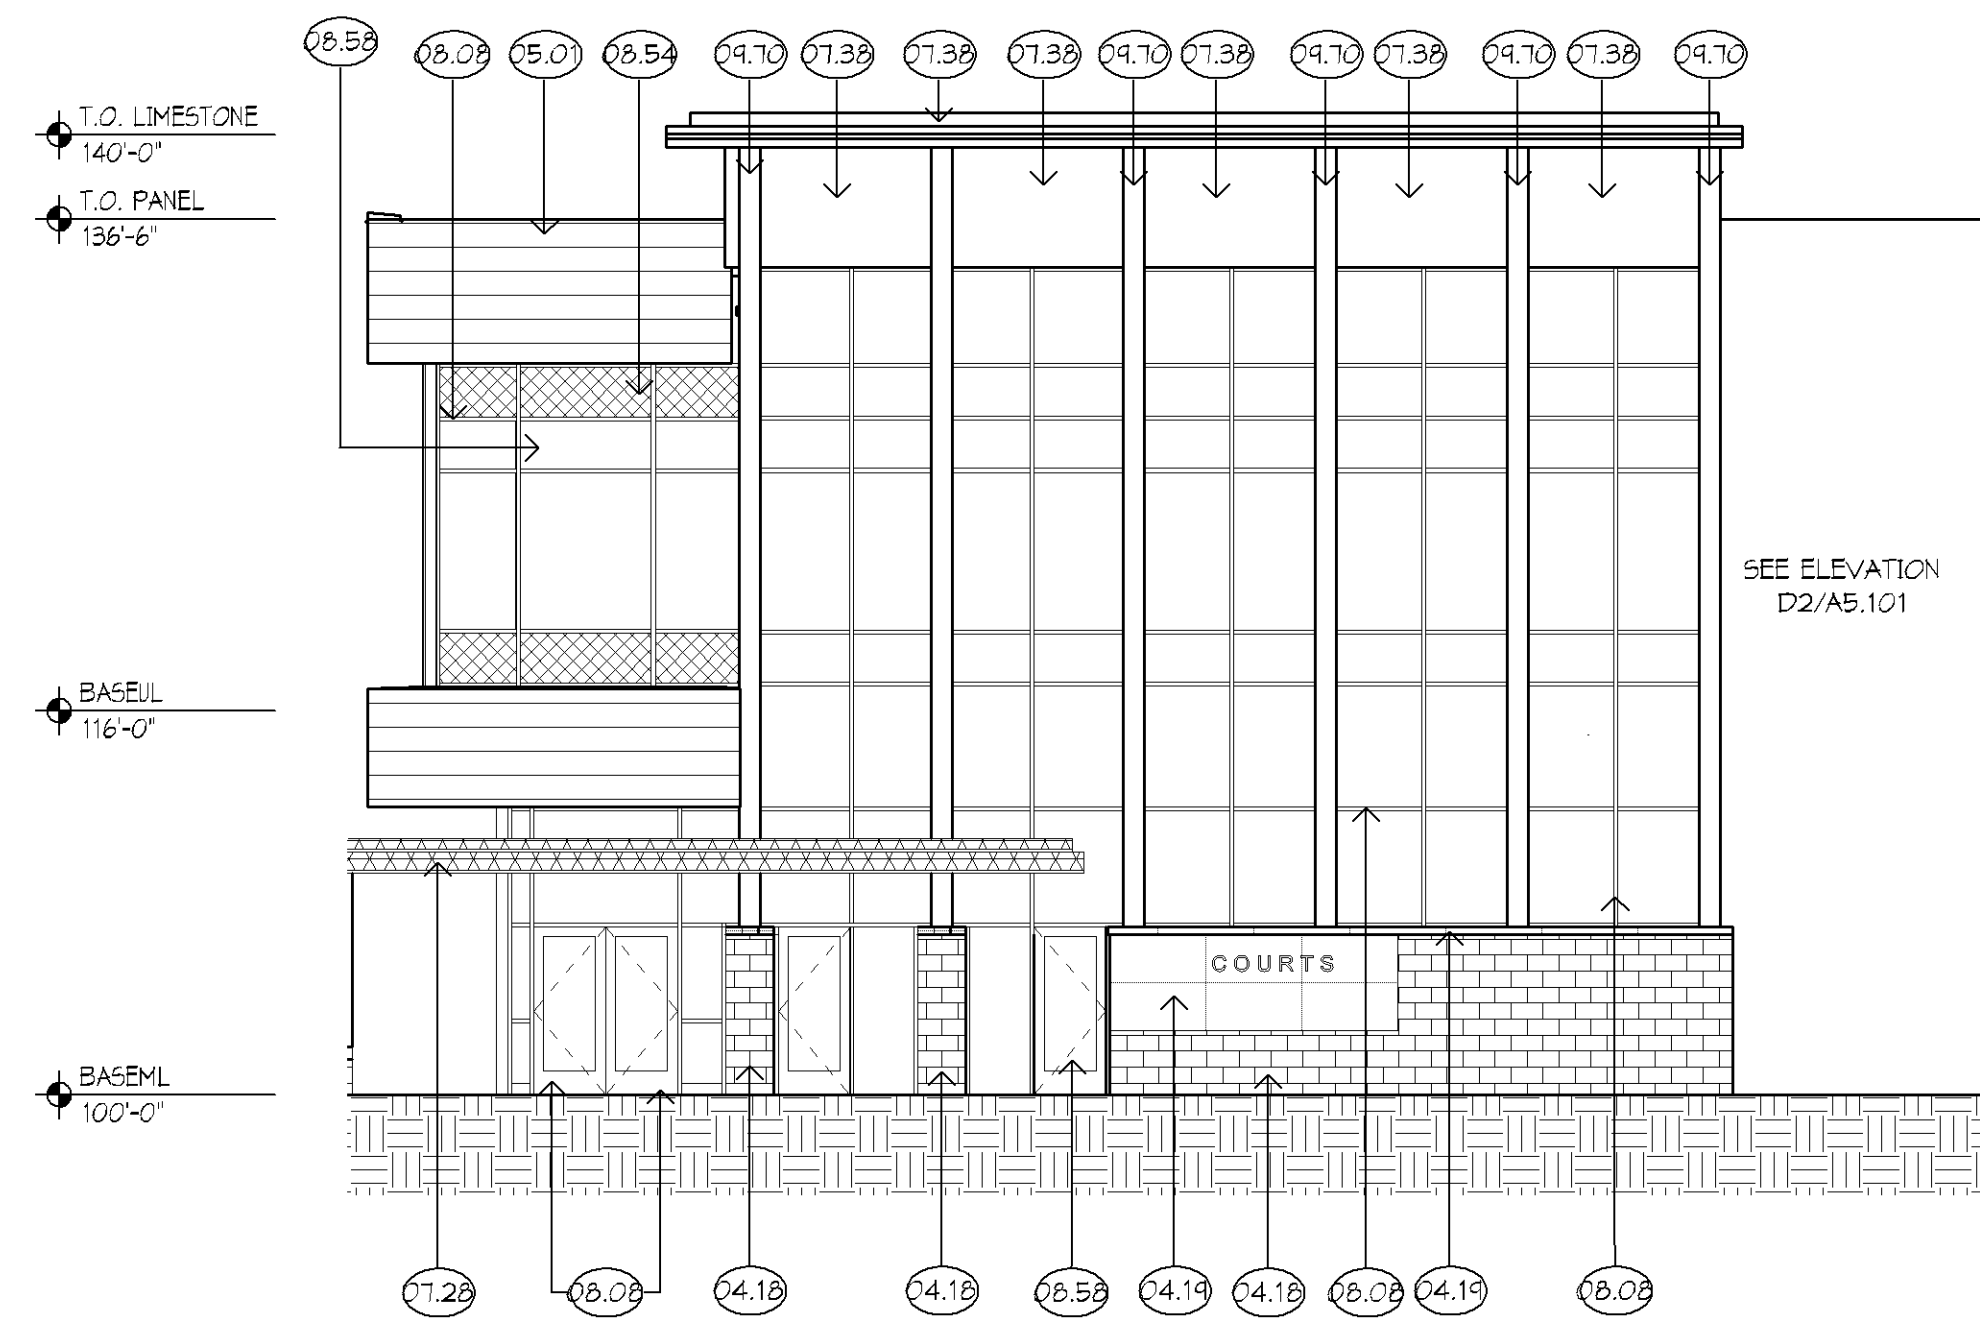


F1 WEST ELEVATION - MAIN ENTRANCE
1/8" = 1'-0"
0 6 12

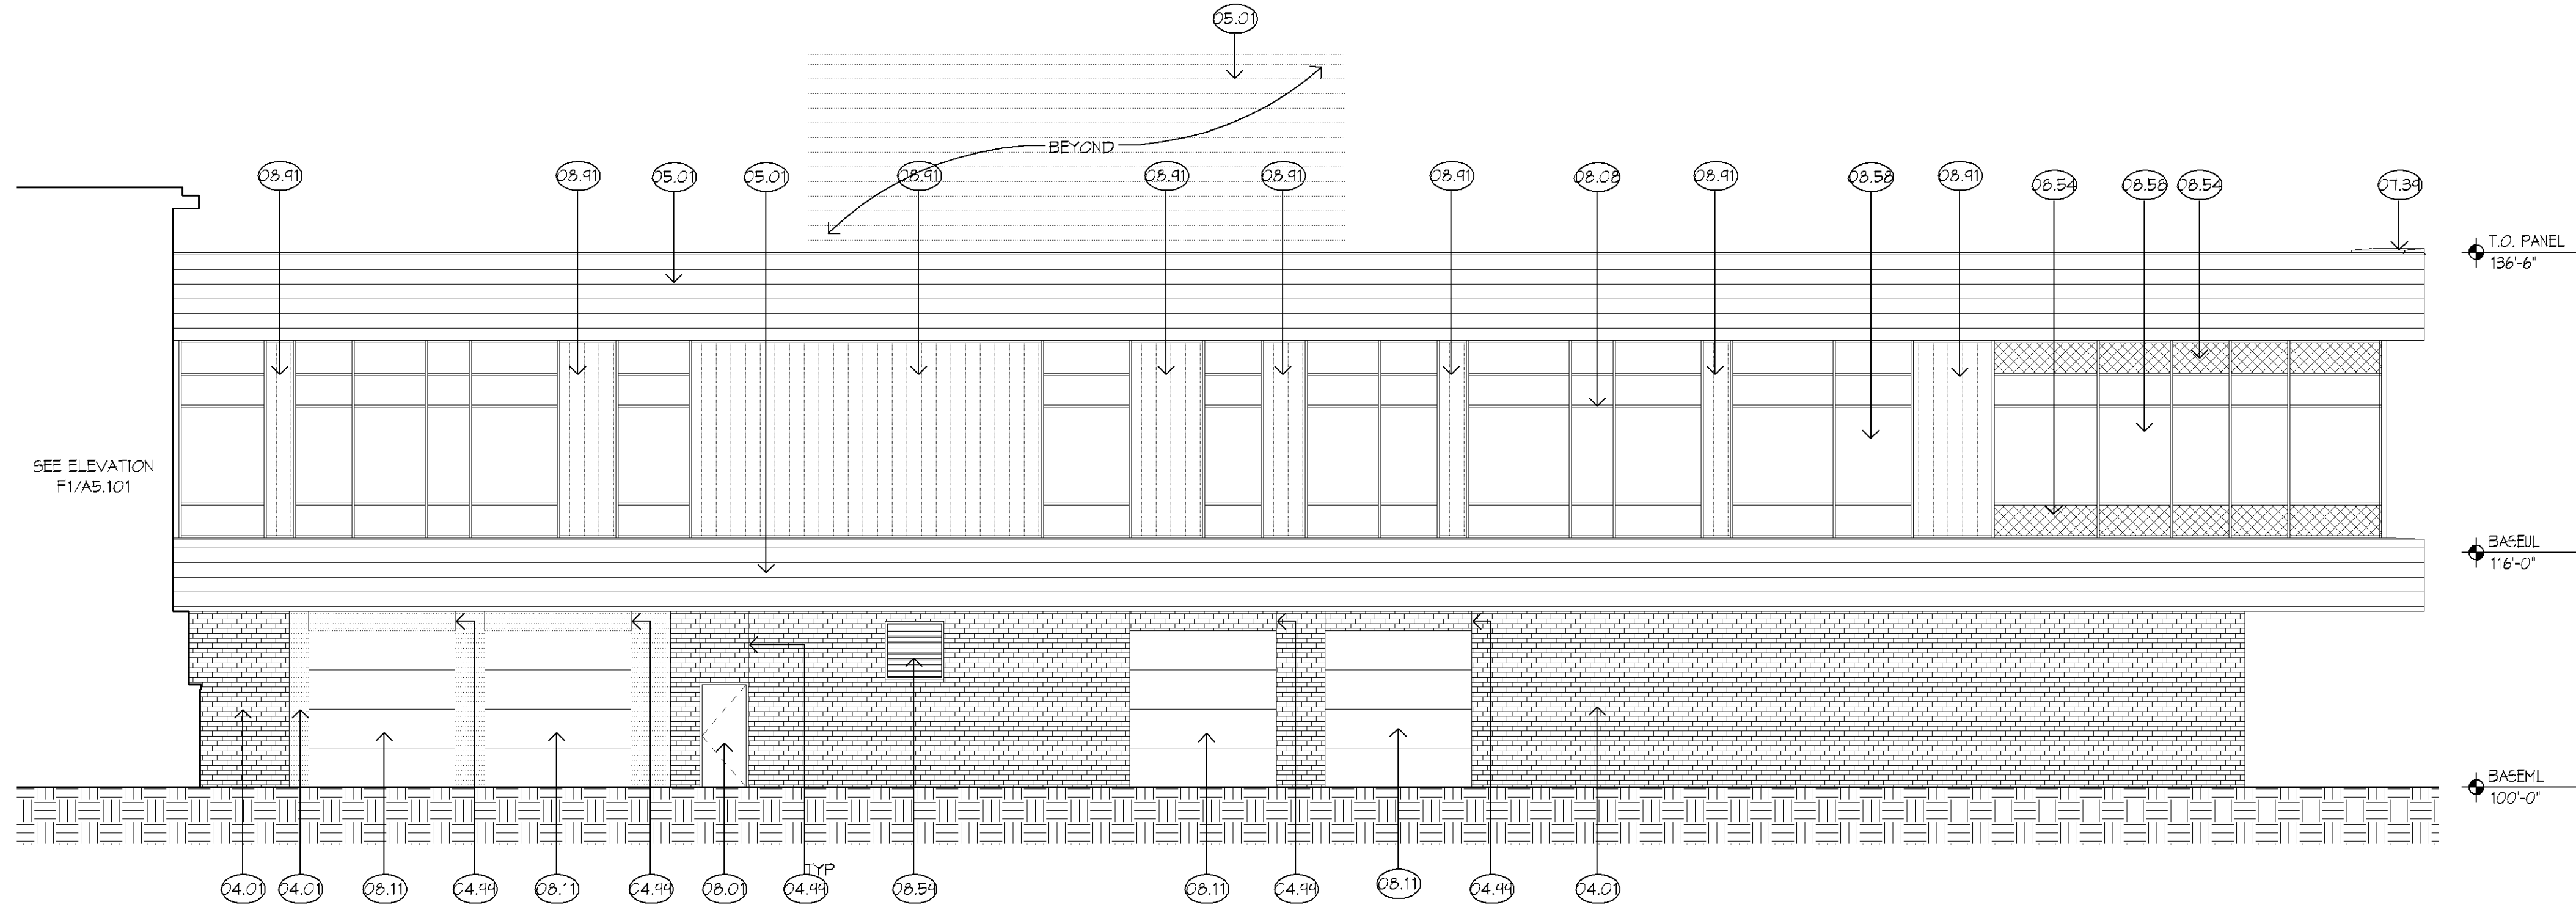


D2 WEST ELEVATION - VEHICLE SALLYPORT AND PUBLIC LOBBY
1/8" = 1'-0"
0 6 12

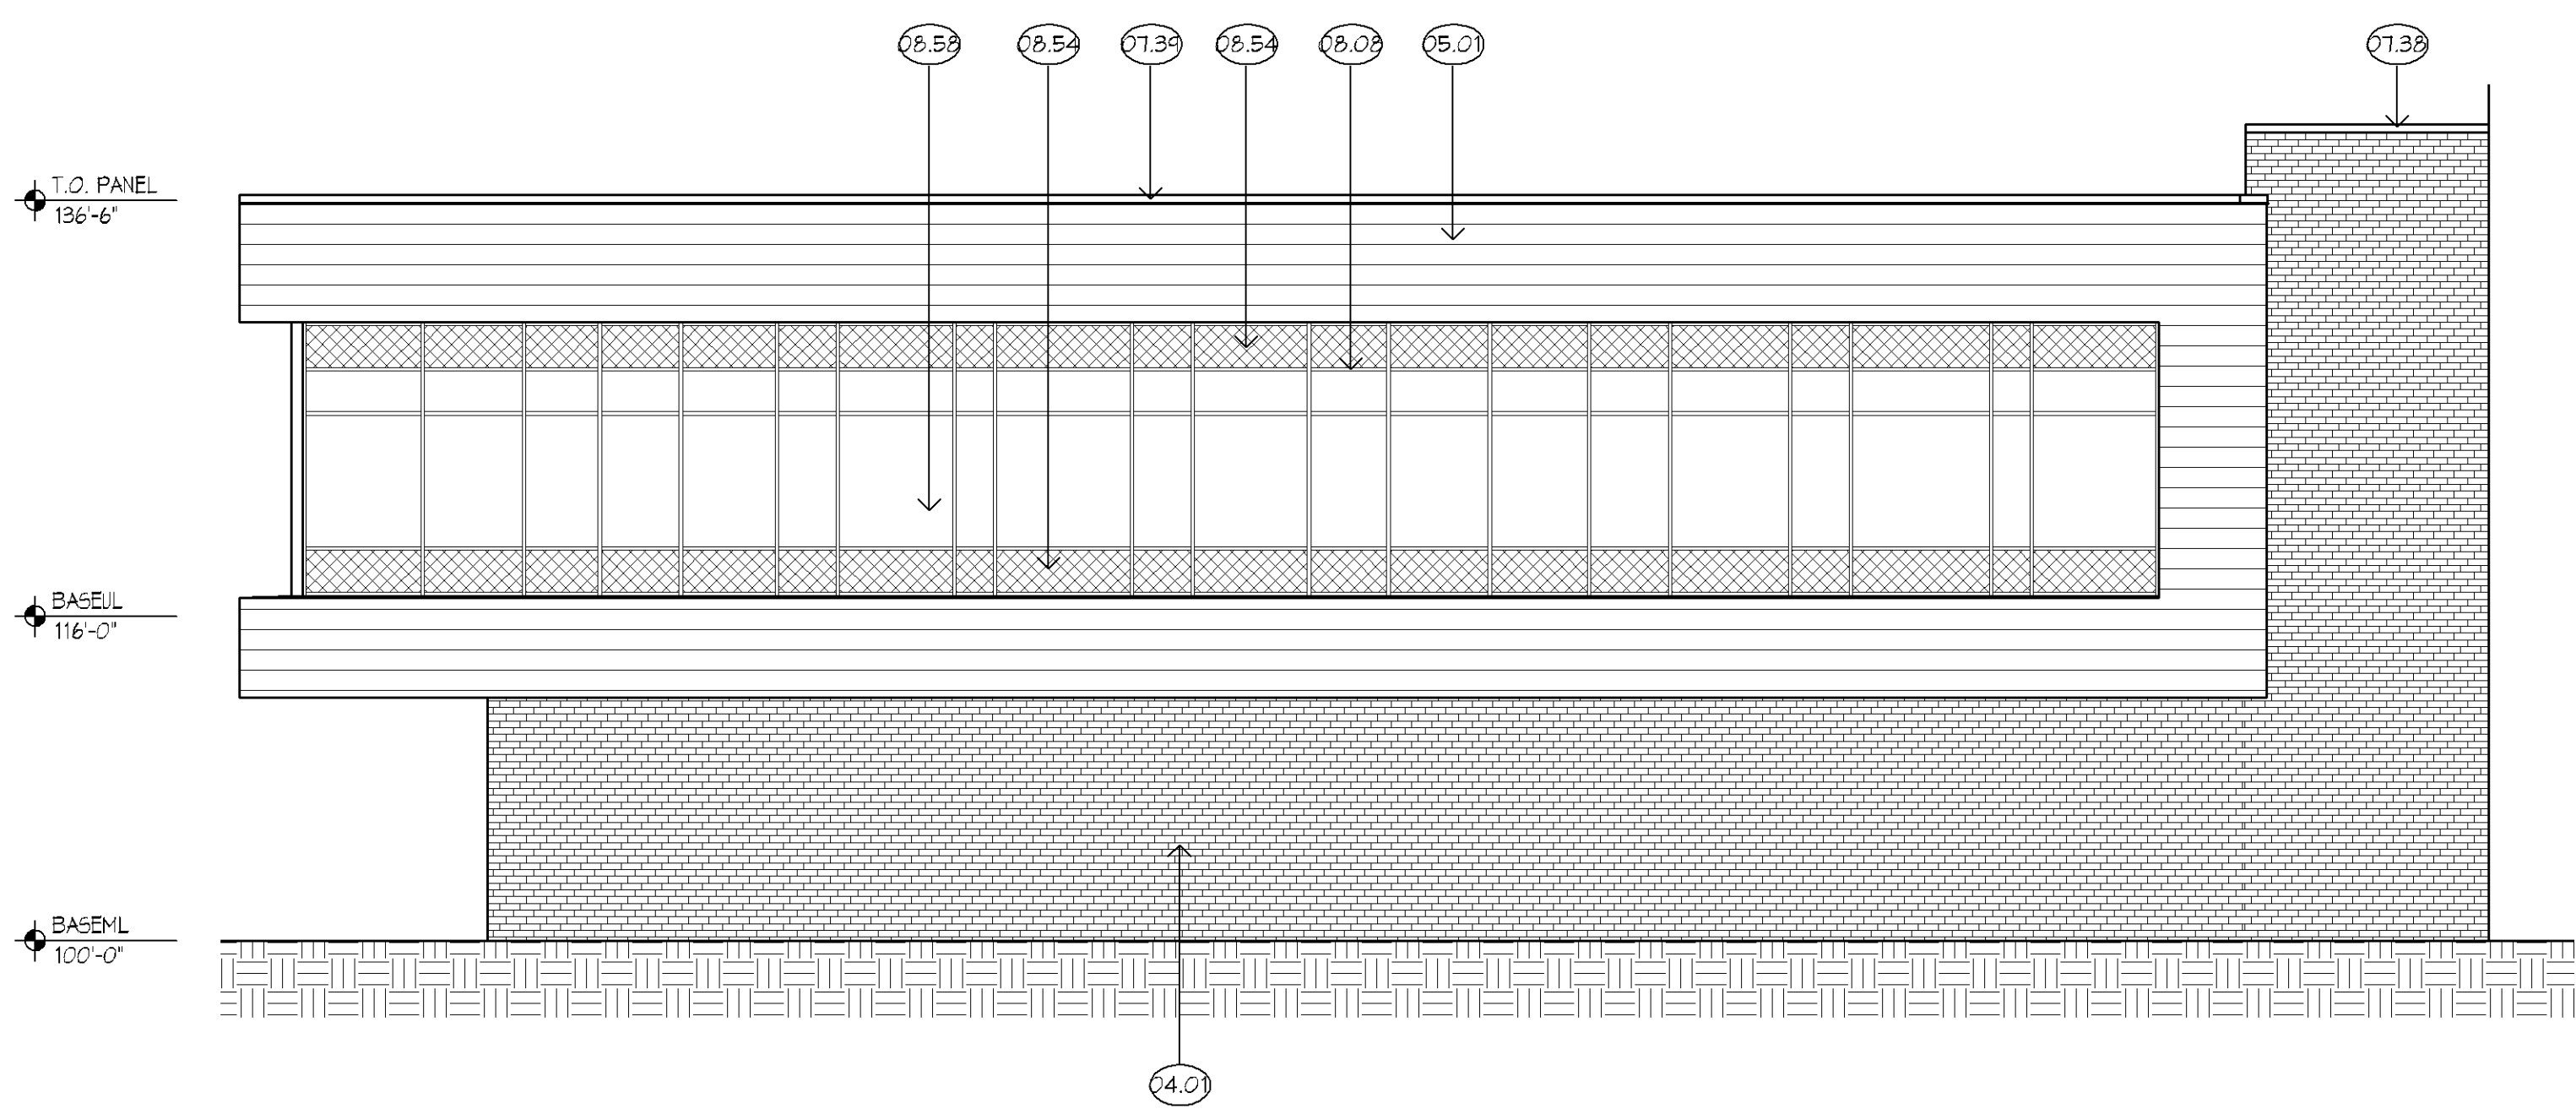

3 SOUTH ELEVATION
1/8" = 1'-0"
0 6 12



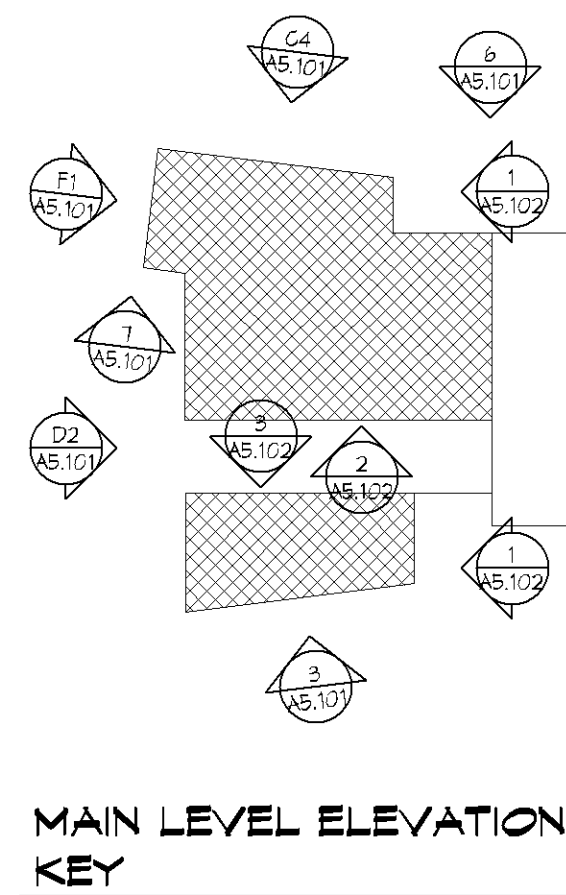


MAIN LEVEL ELEVATION KEY

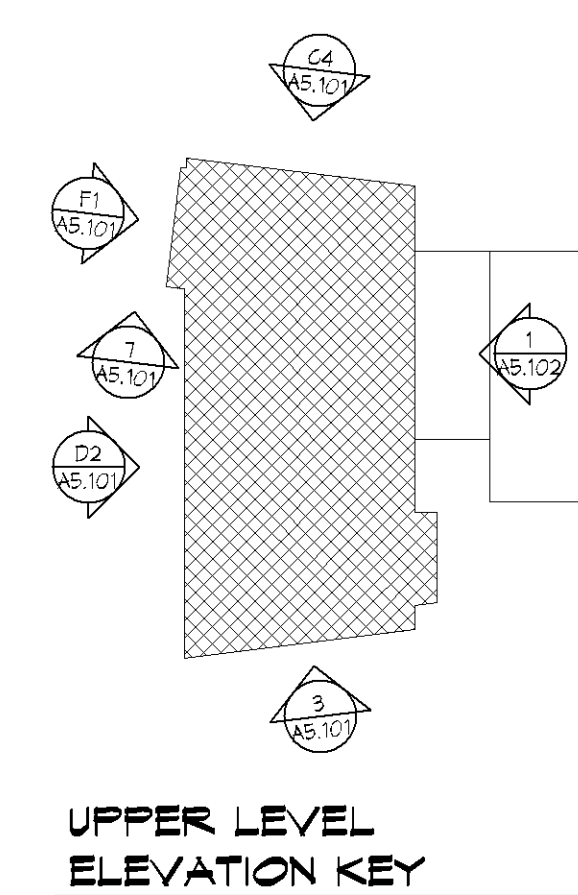

UPPER LEVEL ELEVATION KEY

MATERIALS KEY	
KEY	MATERIAL
04.01	BRICK 1
04.10	GILTON Limestone Masonry Veneer
04.14	KASOTA Limestone Masonry Veneer
04.44	BRICK EXPANSION JOINT
05.01	PREFINISHED PATINA COPPER PANEL
07.20	RIGID INSULATION
07.30	METAL COPING
07.39	COPPER COPING
08.01	GILTON METAL DOOR AND FRAME
08.02	ANGOTED ALUMINUM FRAME
08.11	SECTIONAL METAL OVERHEAD DOOR
08.34	SPANDREL GLASS
08.50	EXTERIOR GLAZING
08.54	PREFINISHED METAL LOUVER
08.61	COMPOSITE BRONZE PANEL
08.10	STAIN SS



NO.	DESCRIPTION	DATE

PROJECT NO.

**HENNEPIN COUNTY
SOUTH SUBURBAN
COURT RELOCATION**

1800 W. Old Shakopee Rd
Bloomington, MN 55431



**EXTERIOR
ELEVATIONS**

DATE	BY	APP'D	CHECKED
1/2/15	As	Author	Checker
1/2/15	As	Author	Checker
1/2/15	As	Author	Checker
1/2/15	As	Author	Checker

A5.101

**PRE DRG SET
NOT FOR CONSTRUCTION**






A

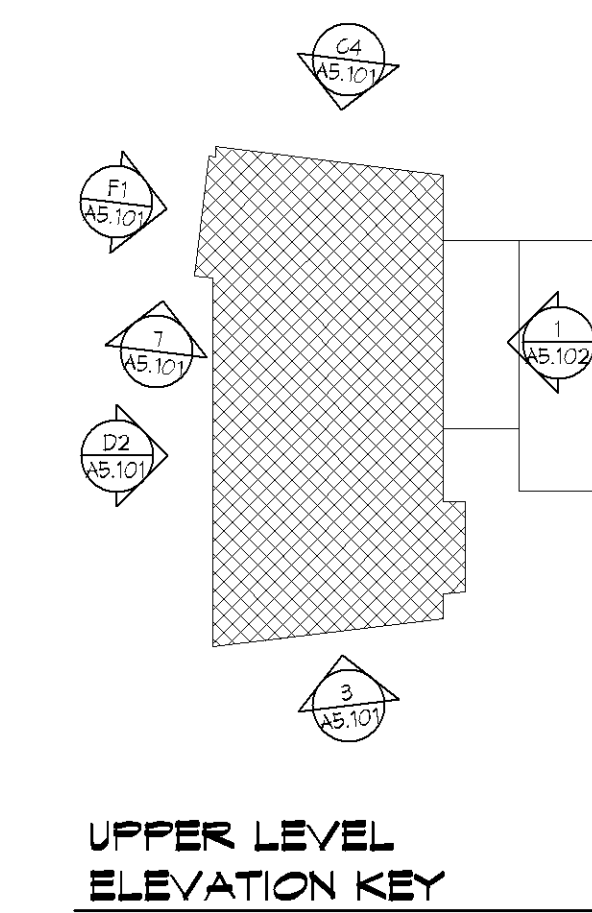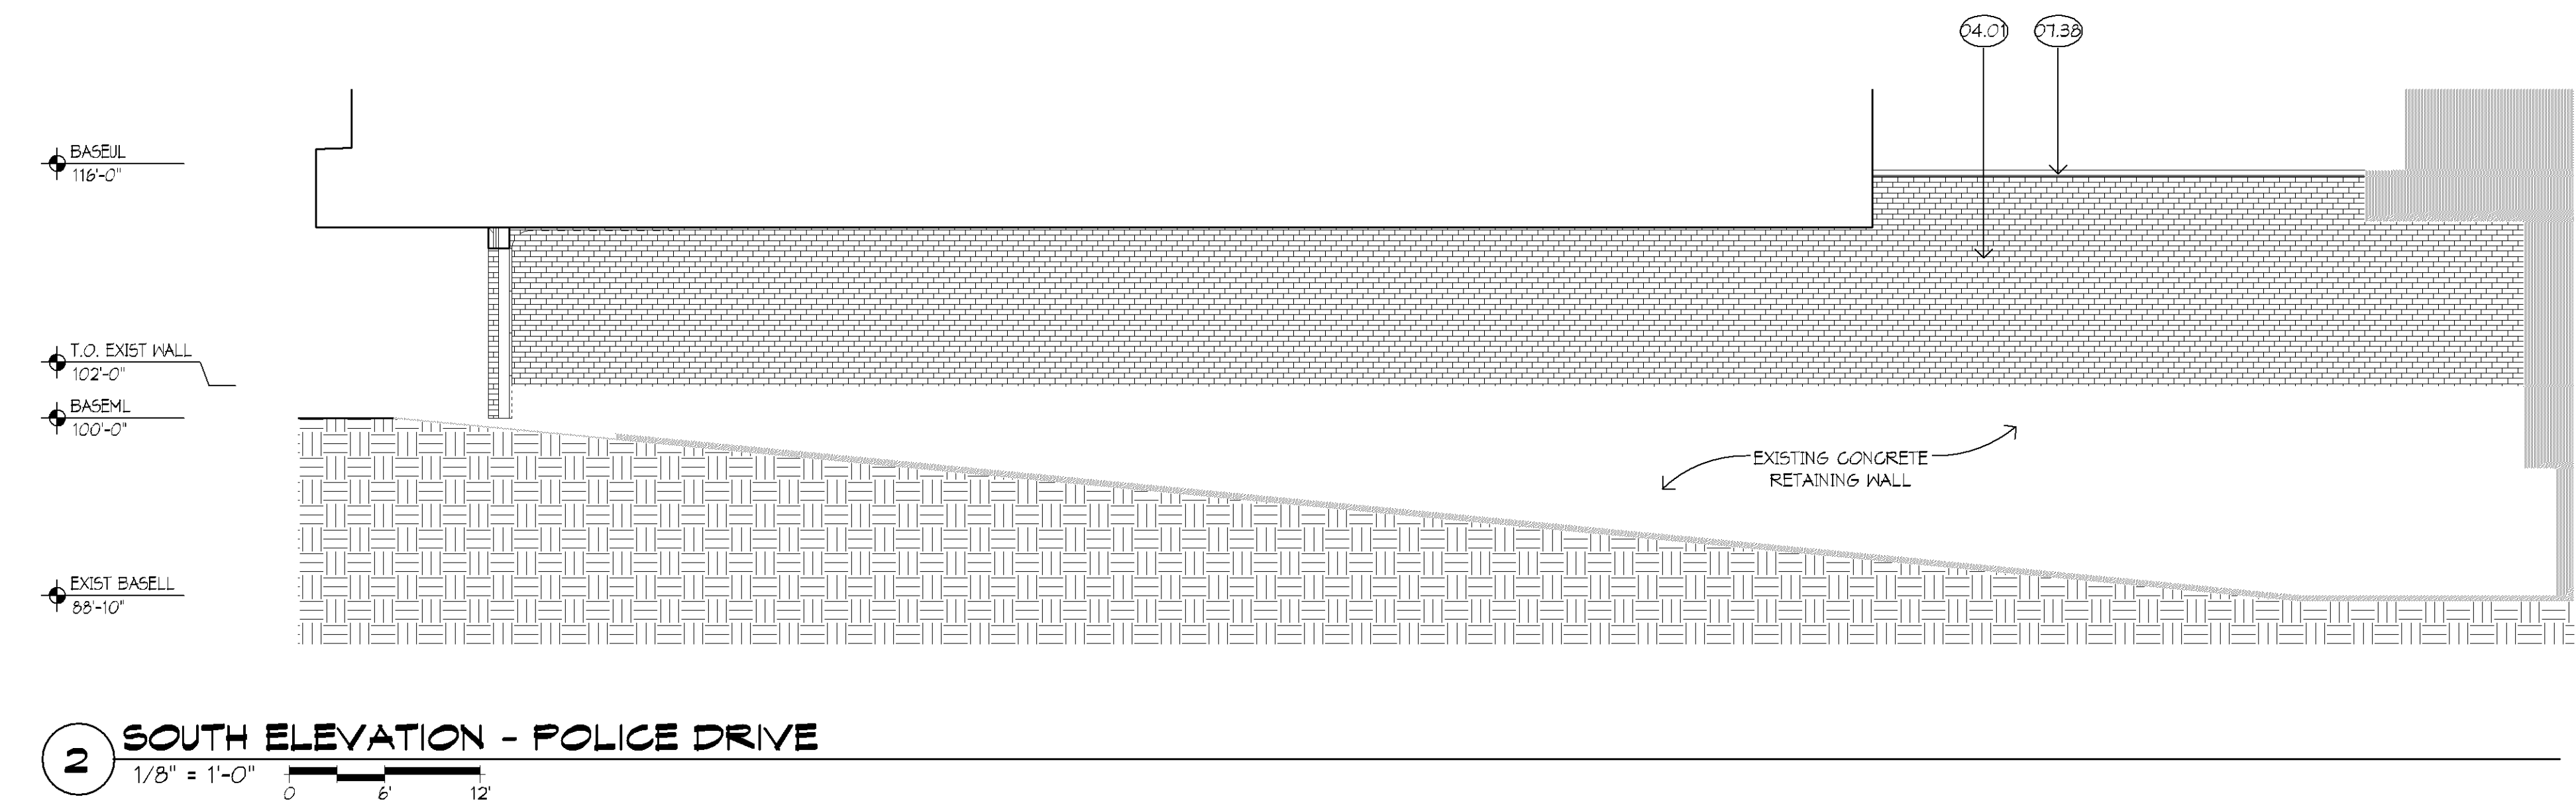

MATERIALS KEY	
KEY	MATERIAL
04.01	BRICK 1
04.18	CHILTON LIMESTONE MASONRY VENEER
04.19	KASOTA LIMESTONE MASONRY VENEER
04.96	BUILDING CONTROL JOINT
05.01	PREFINISHED PATINA COPPER PANEL
07.38	METAL COPING
08.01	HOLLOW METAL DOOR AND FRAME
08.08	ANODIZED ALUMINUM FRAME
08.58	EXTERIOR GLAZING

A5.102

MN

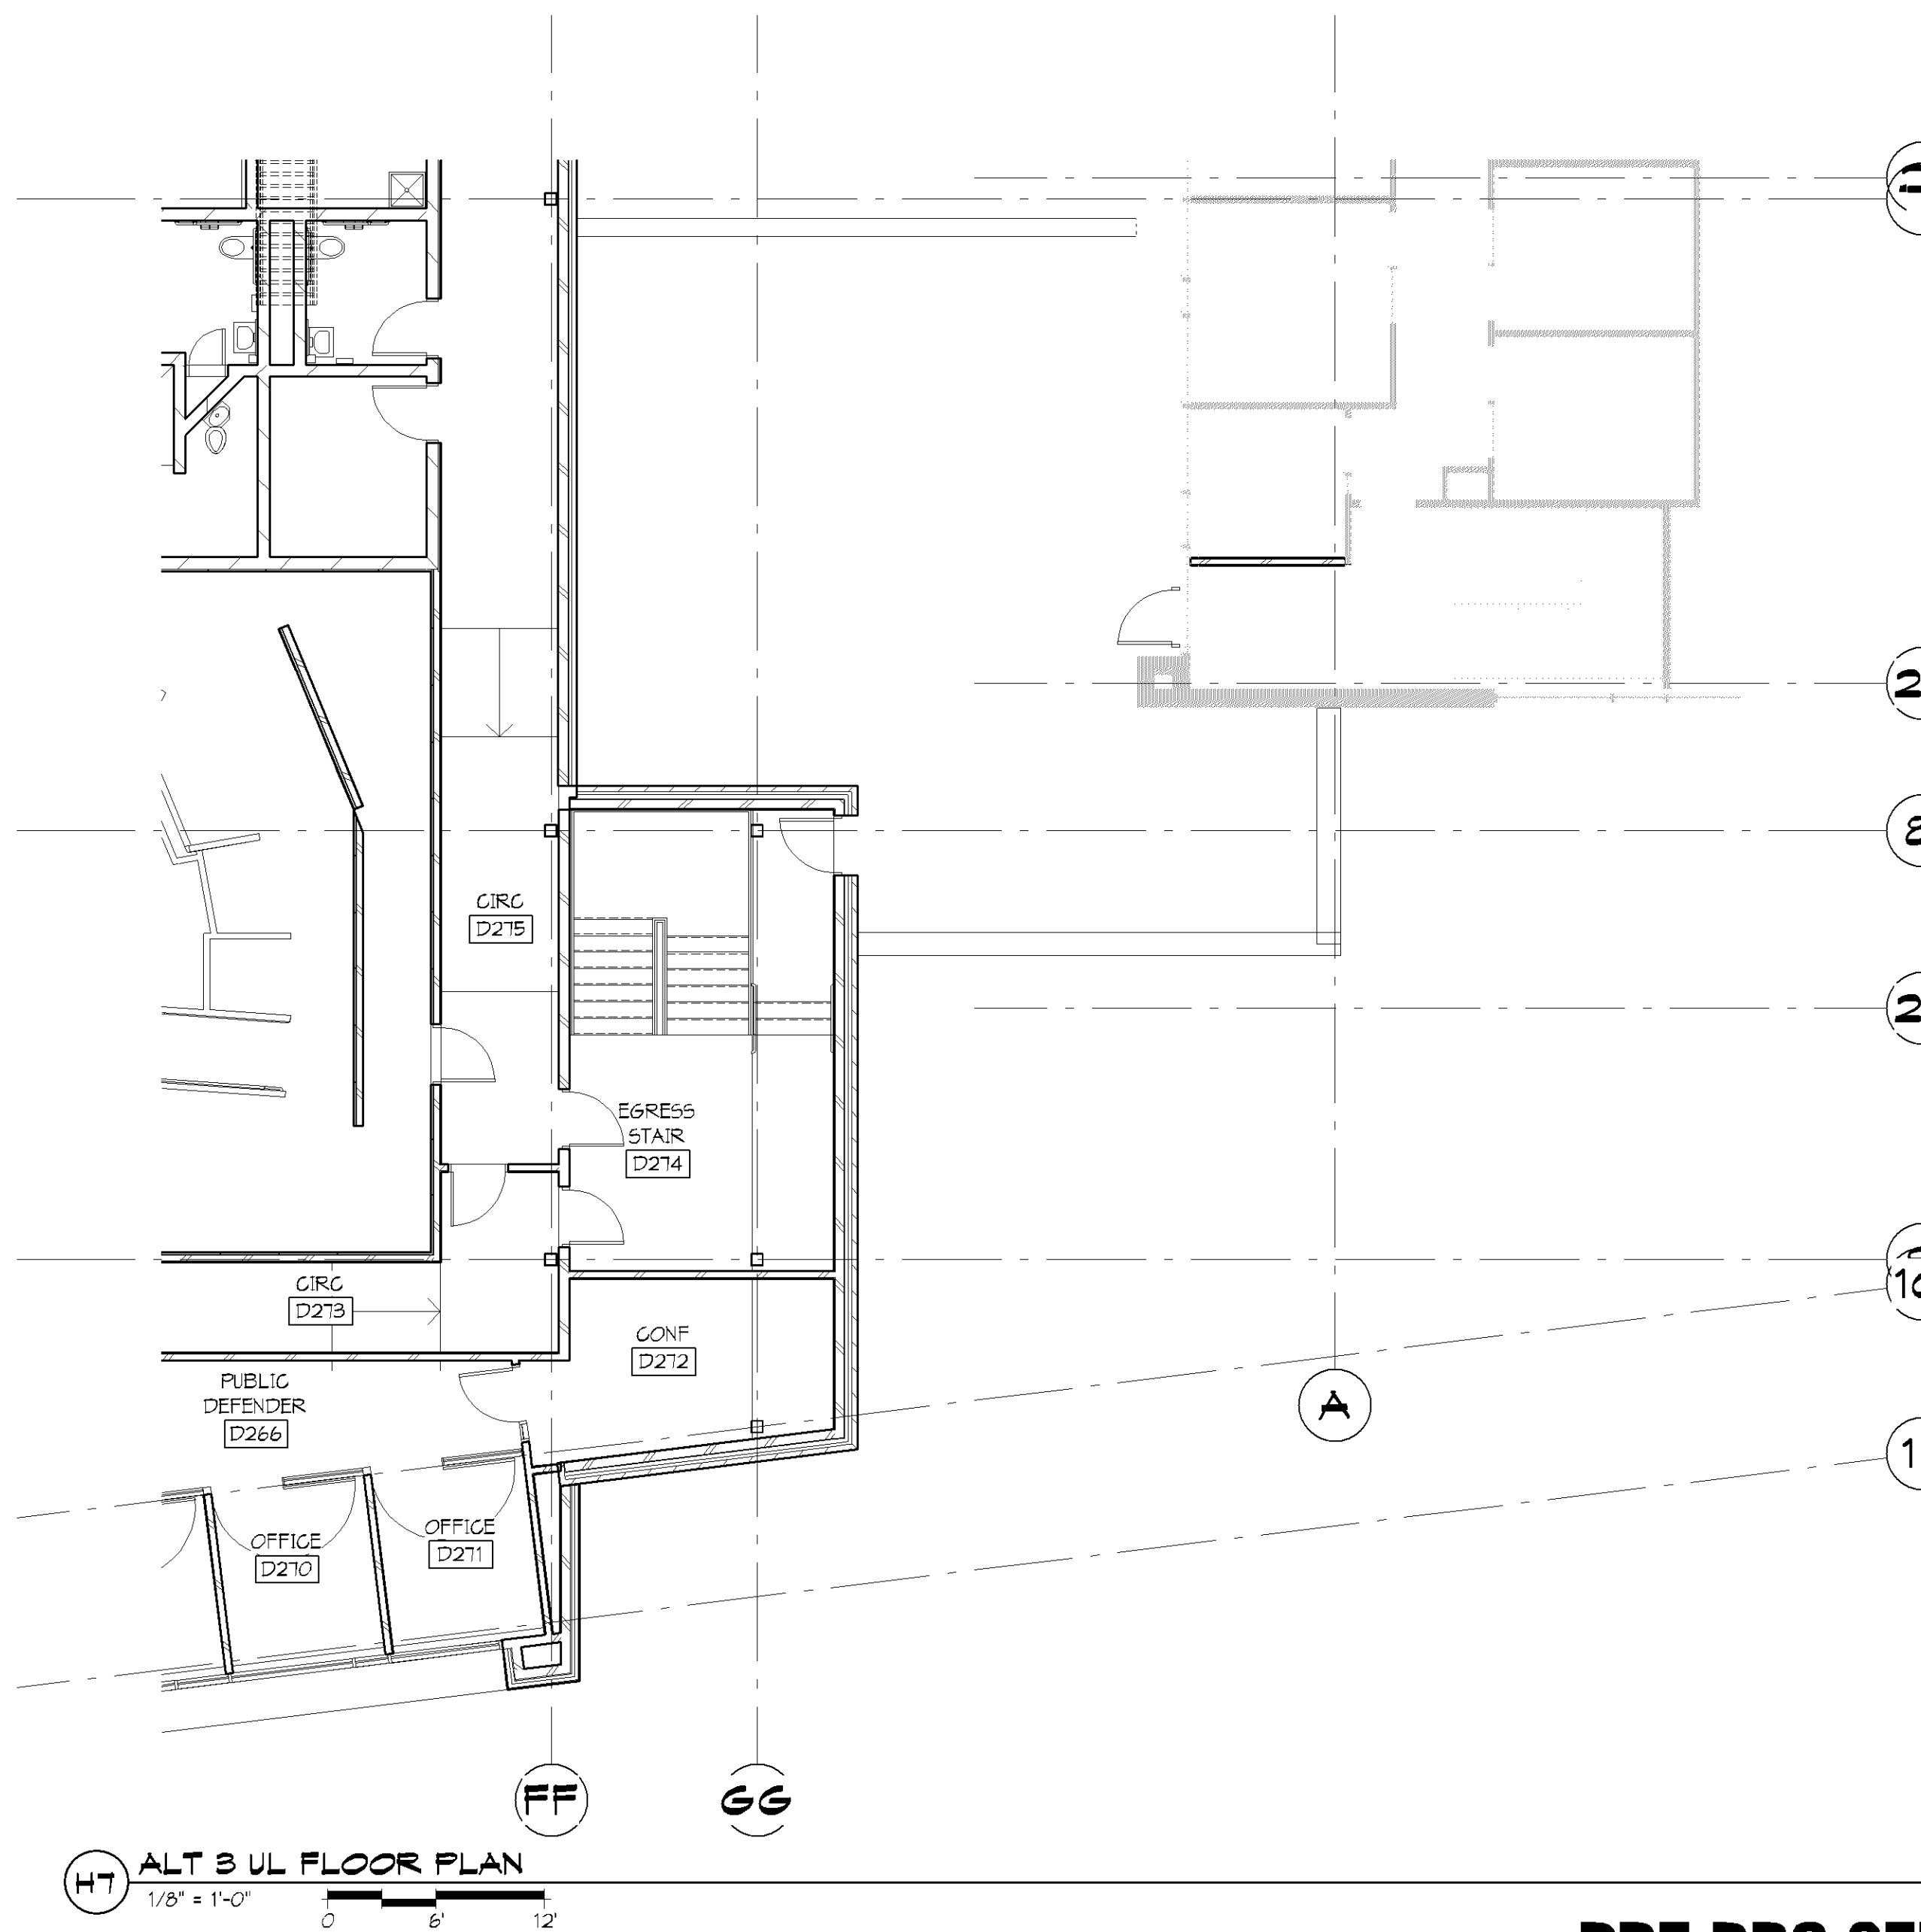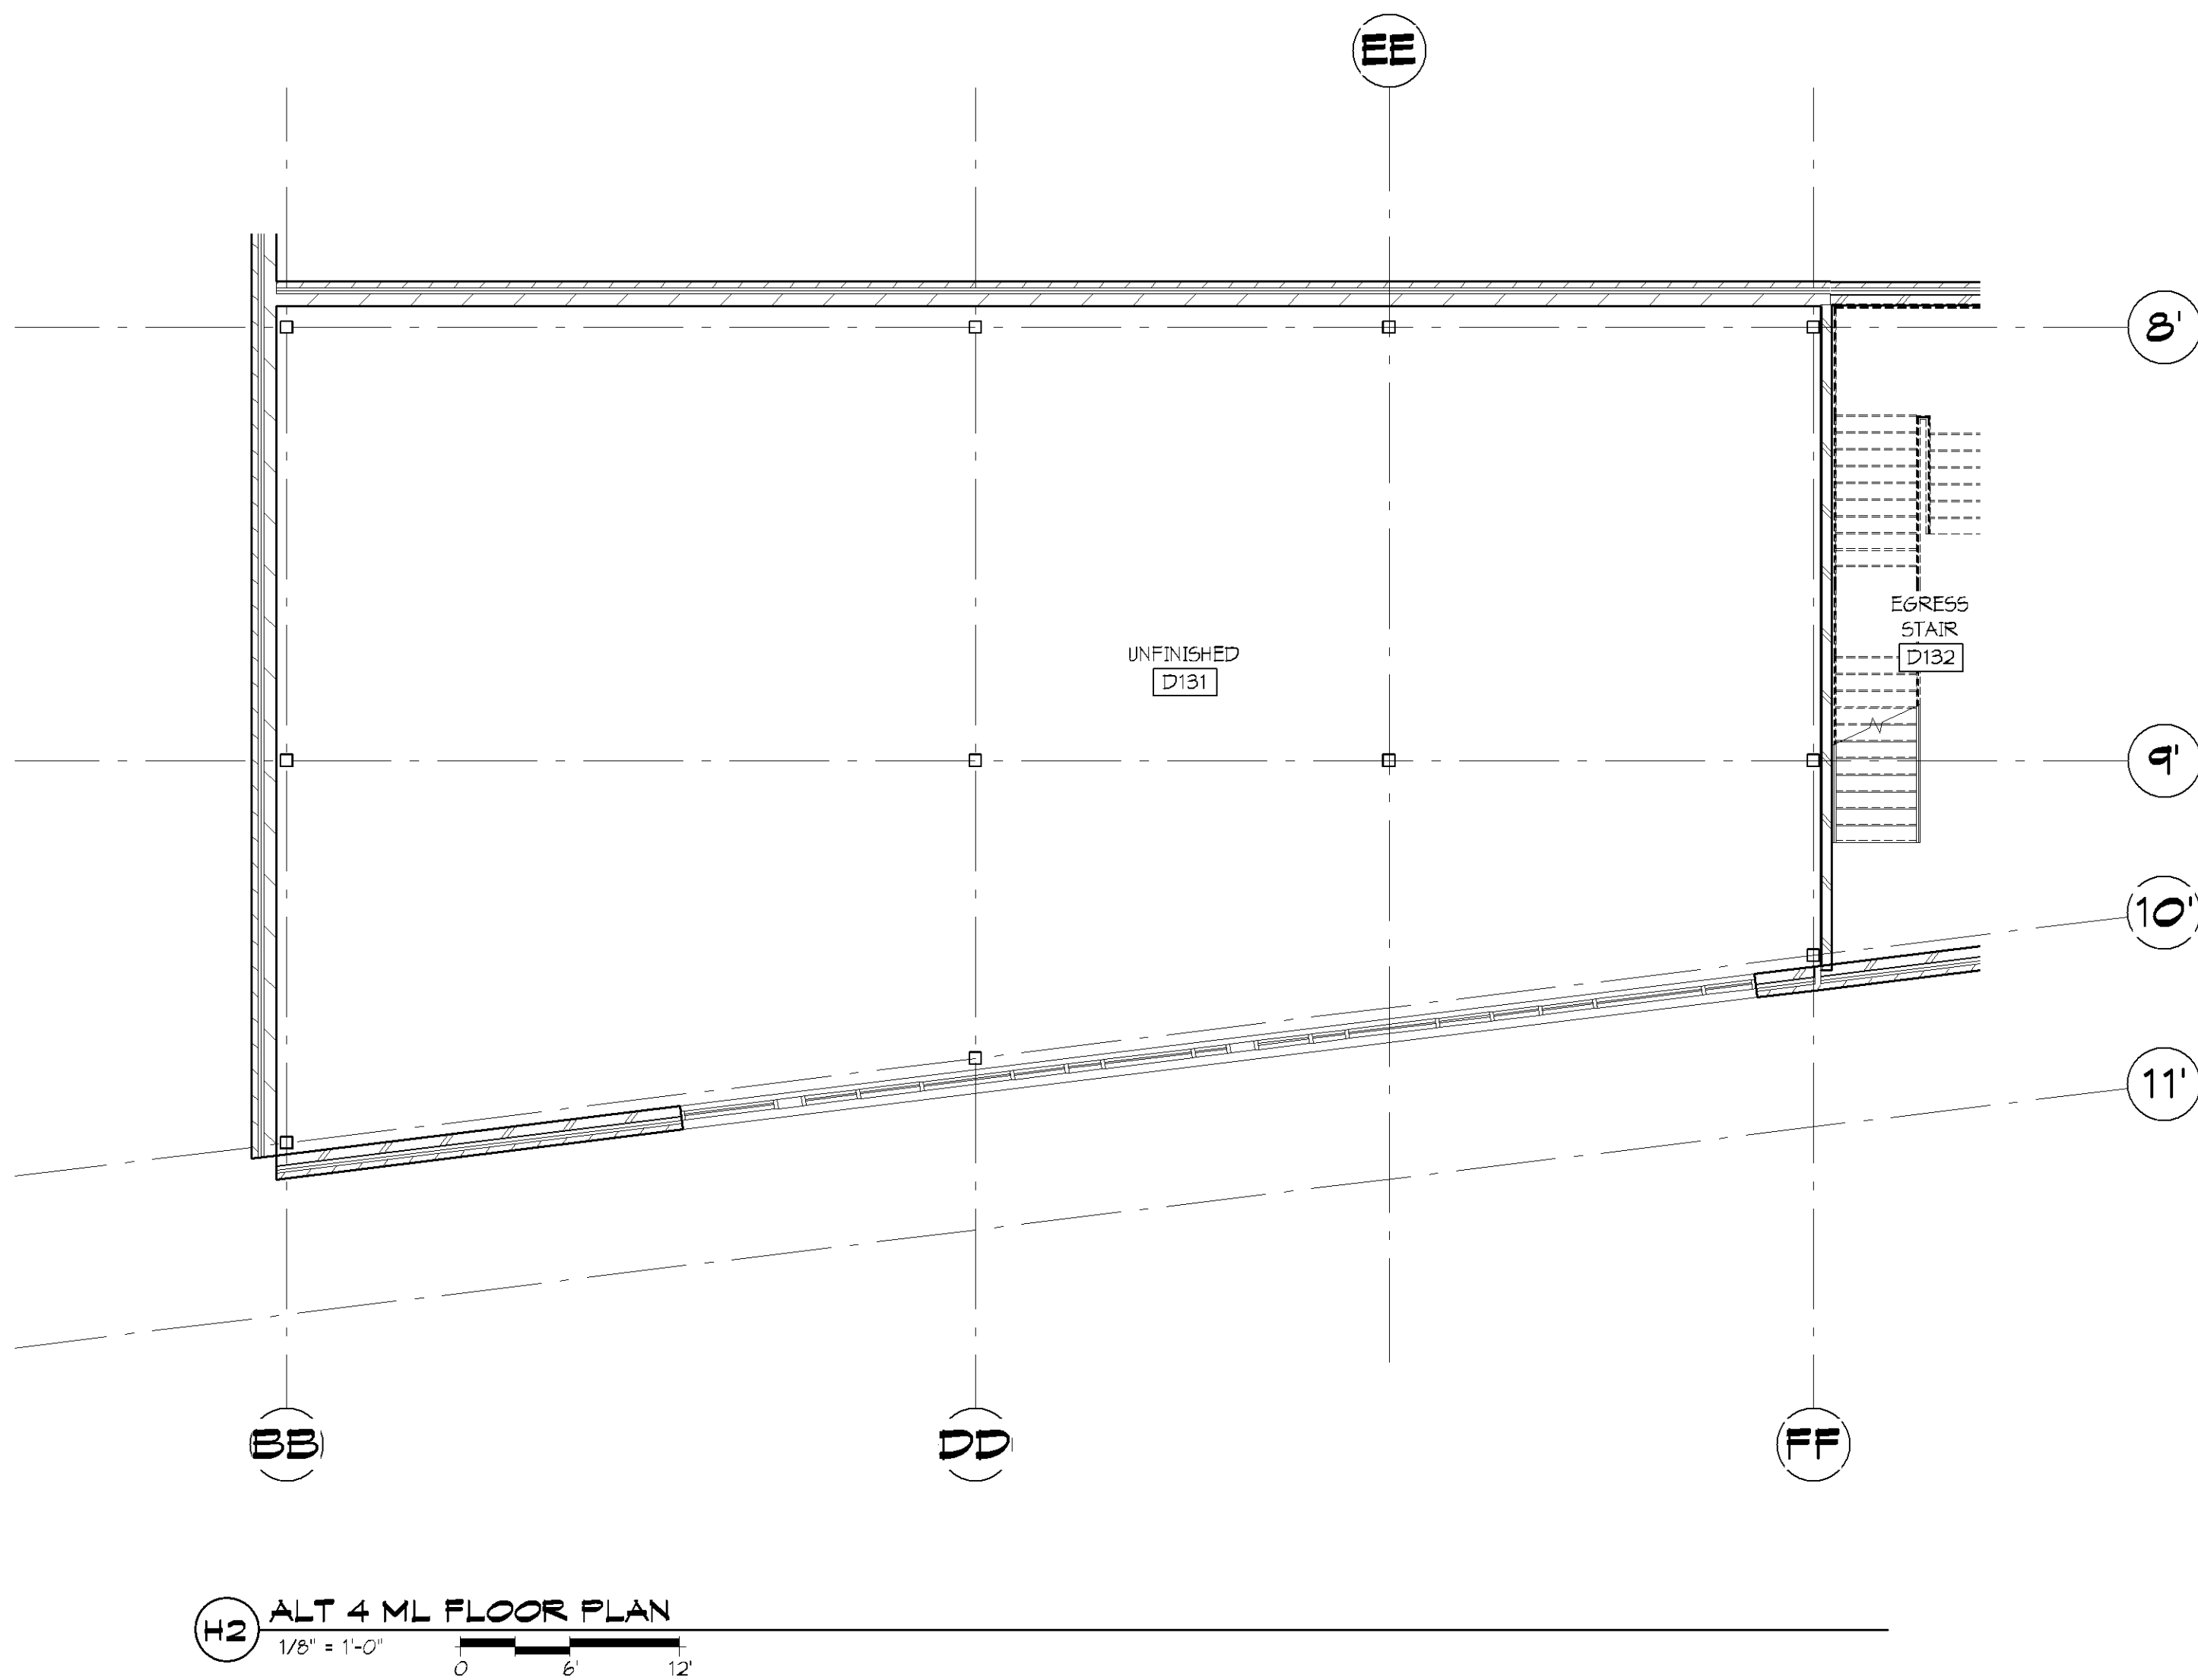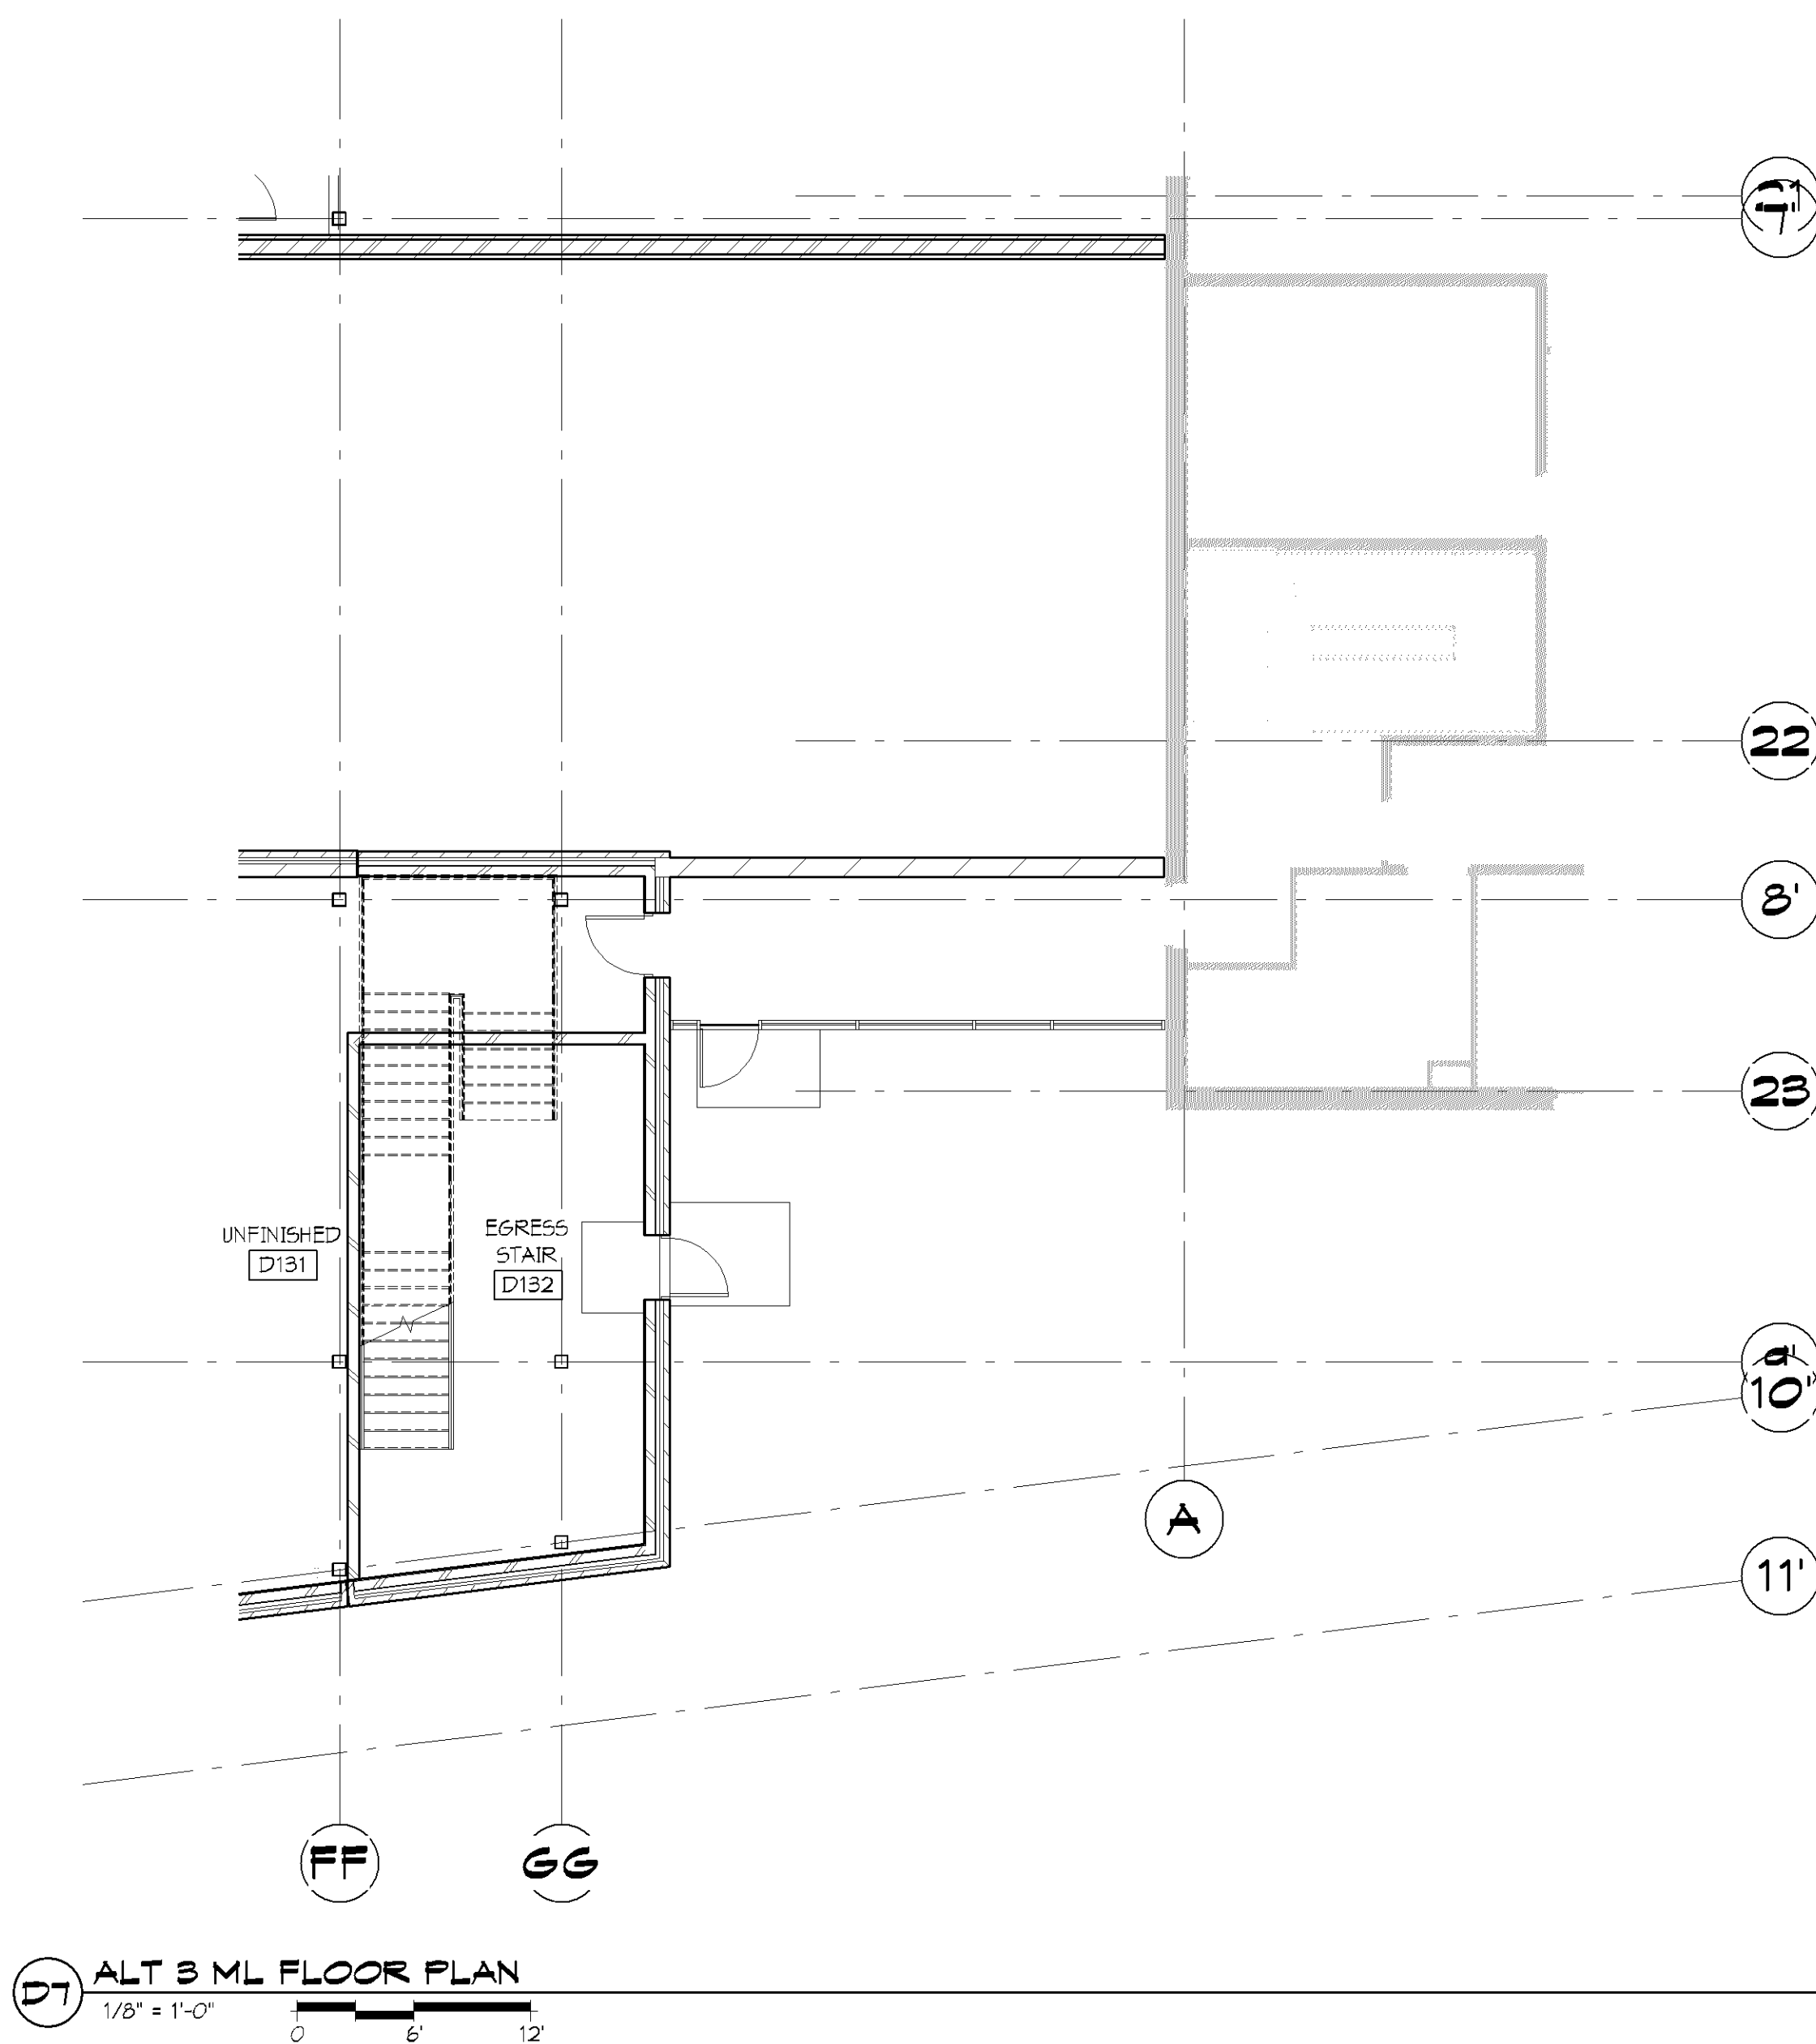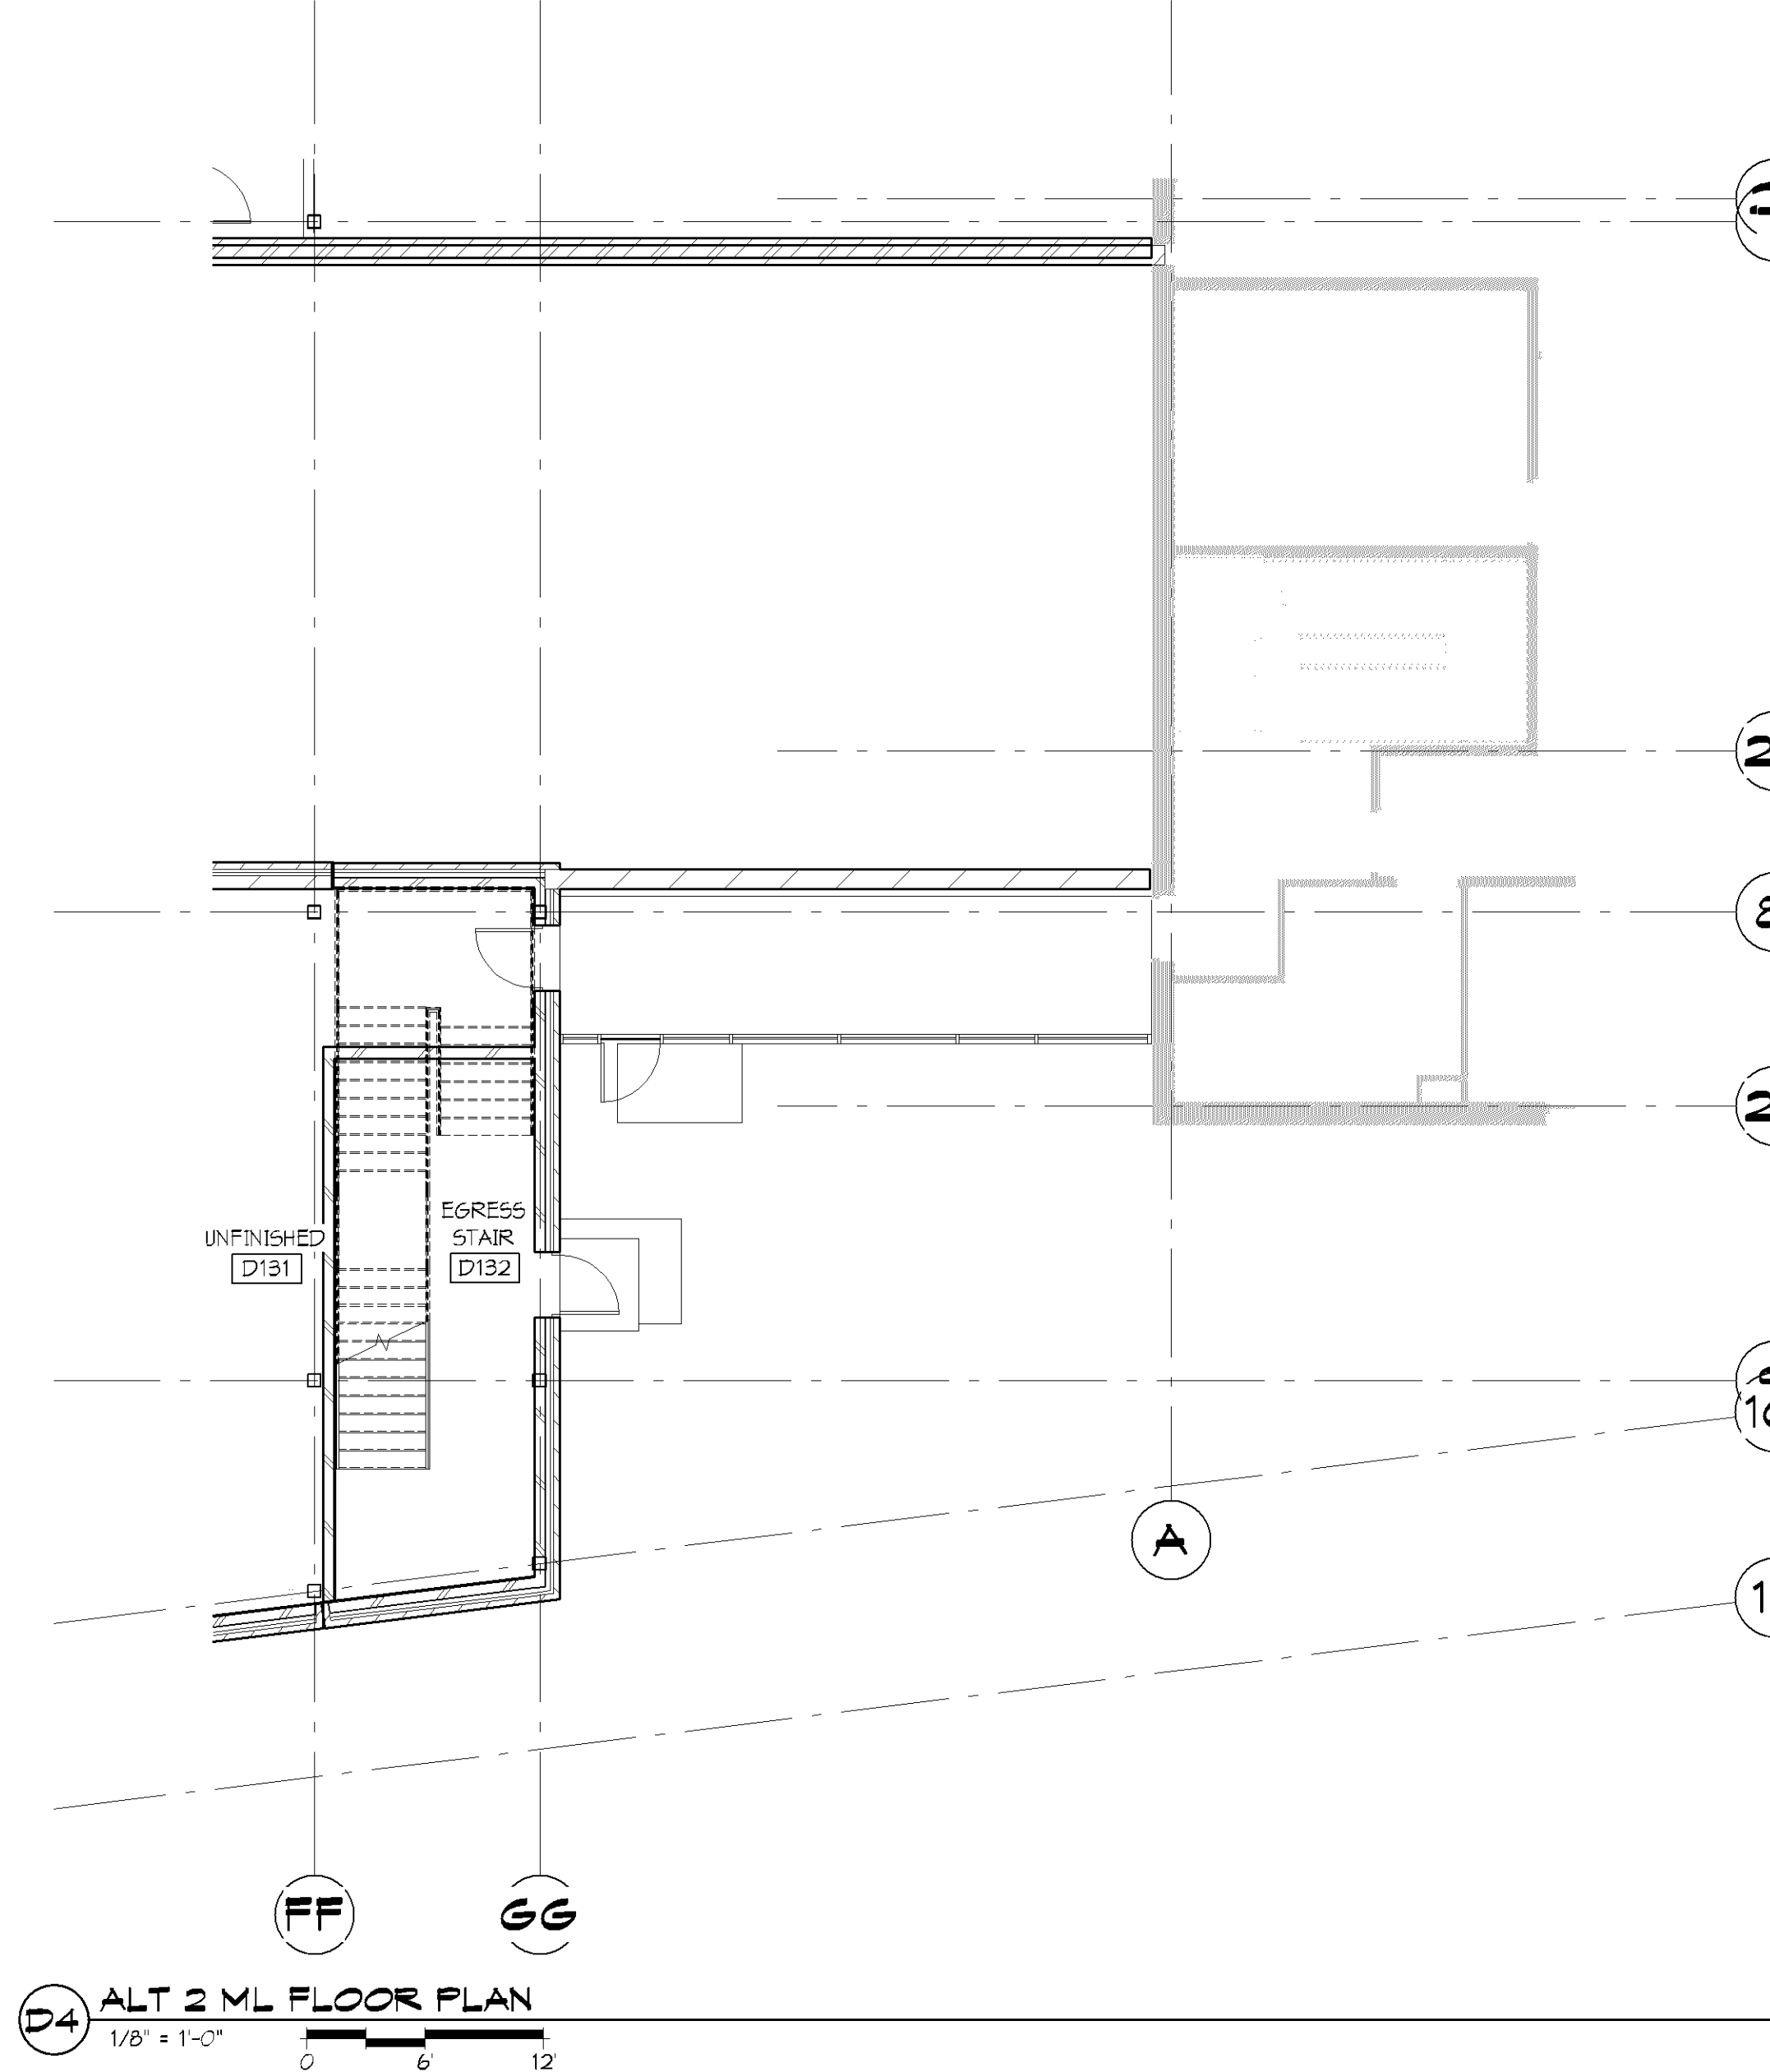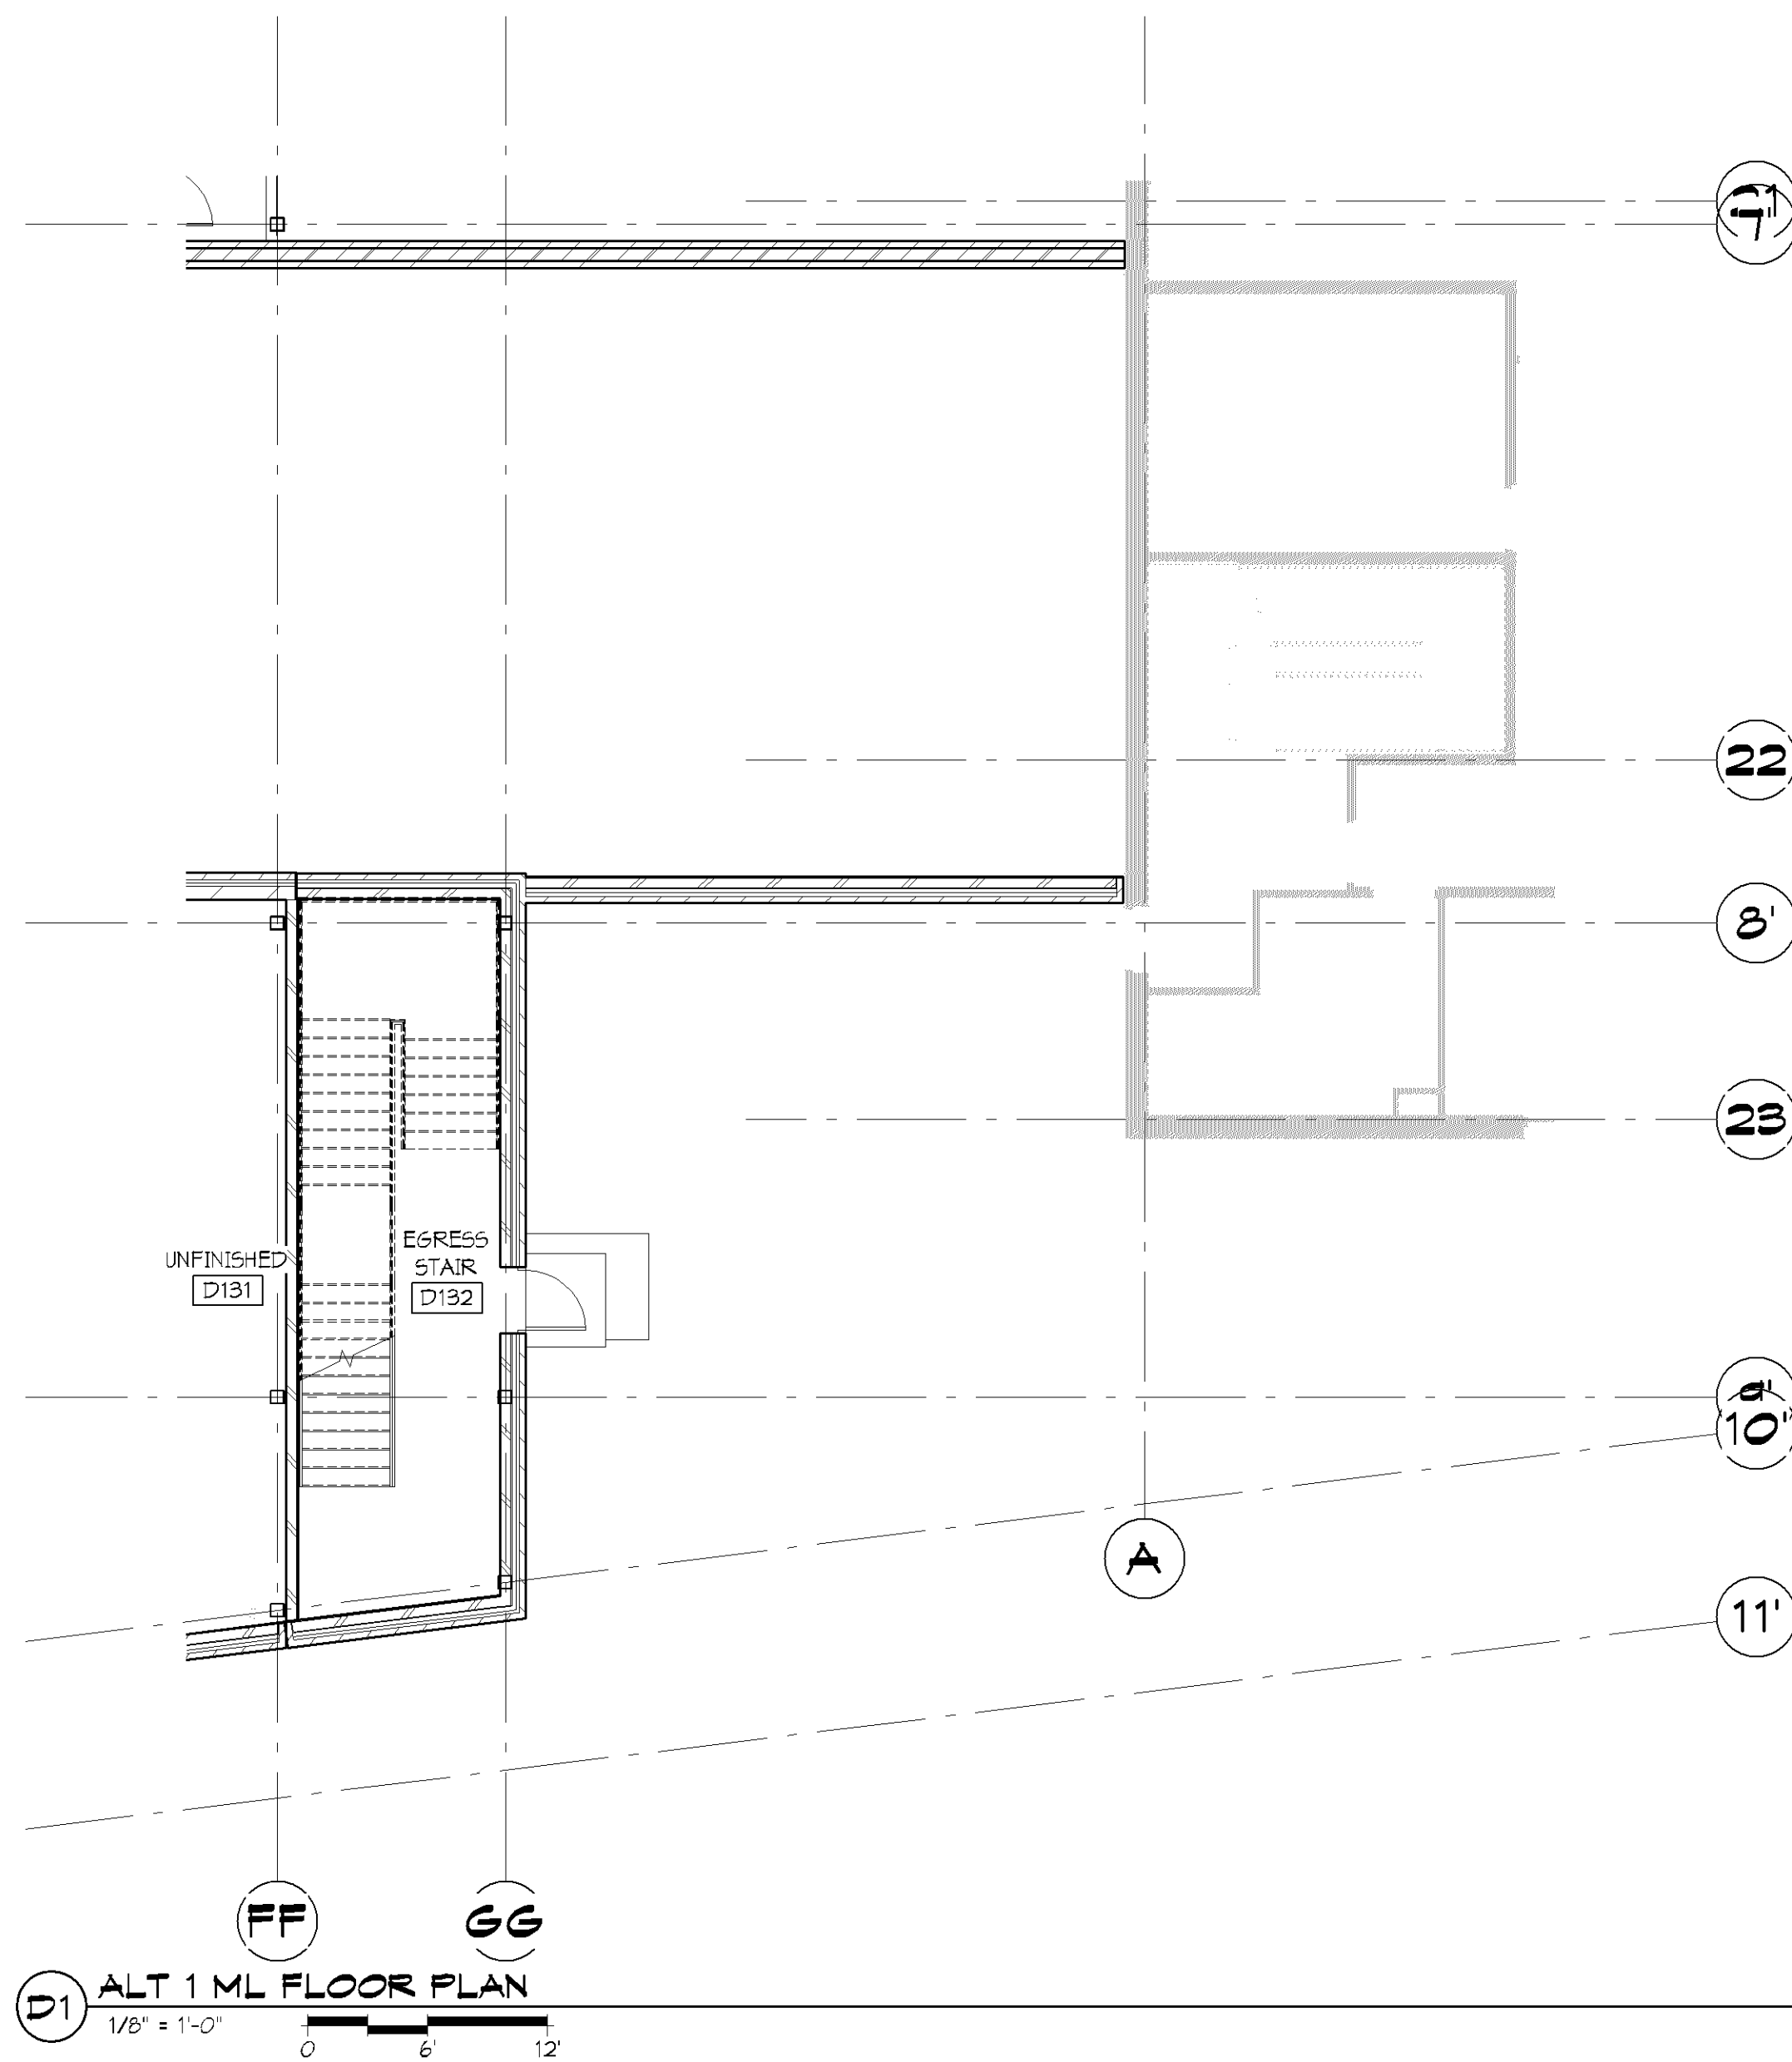

PRE DRG SET
NOT FOR CONSTRUCTION



WOLD ARCHITECTS
AND ENGINEERS
332 Minnesota Street, Suite W2000
Saint Paul, MN 55101

woldco.com | 651.227.7773

Registration:
Professional Seal: [Seal] License No.: [Number] State: [State]
Professional Seal: [Seal] License No.: [Number] State: [State]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]

Project Number: [Number] Issue Date: [Date]

Project Name: [Name] Issue Date: [Date]



EXTERIOR | View from West



EXTERIOR | View from Southeast



EXTERIOR | View from Southwest



EXTERIOR | View from Entry Drive



EXTERIOR | Southwest Elevation

OPTIONS

It will be confusing to submit a plan that has several, optional elements. While not a zoning consideration, it should be made as clear as possible what is being proposed and what are additional, optional elements.

Four options were introduced to the project during Design Development. These options are located plan south on the addition and include:

Option 1: Enclosed Ramp

This option stretches the new roof over the vehicular sallyport plan south to bear on a new masonry wall built on the southern existing retaining wall. The brick cladding the walls facing the ramp in base bid would no longer be applied as the ramp would now be an interior space.

Option 2: Breezeway Connection



The second option adds to the first by proposing a breezeway connection between the existing building and the addition plan south of the enclosed ramp. This breezeway makes use of an existing door to the east and proposes a new door into the shelled space under the proposed egress stair. The breezeway will have one door facing the police parking lot and will be constructed of glass and brick to match existing.

Option 3: Occupiable Roof



The third option proposes an occupiable space on the roof proposed in options 1 and 2. This space will be accessed by a connection to Police through an existing office in the upper level of the Civic Plaza. A second, code-required egress from the roof is proposed through the new egress stair tower.

Option 4: Window in Shelled Space


The final option is independent of the previous three. Option 4 proposes a ribbon window in the southern facade of the shelled space. The design of the proposed window is taken directly from the Civic Plaza to maintain a cohesive architectural language.

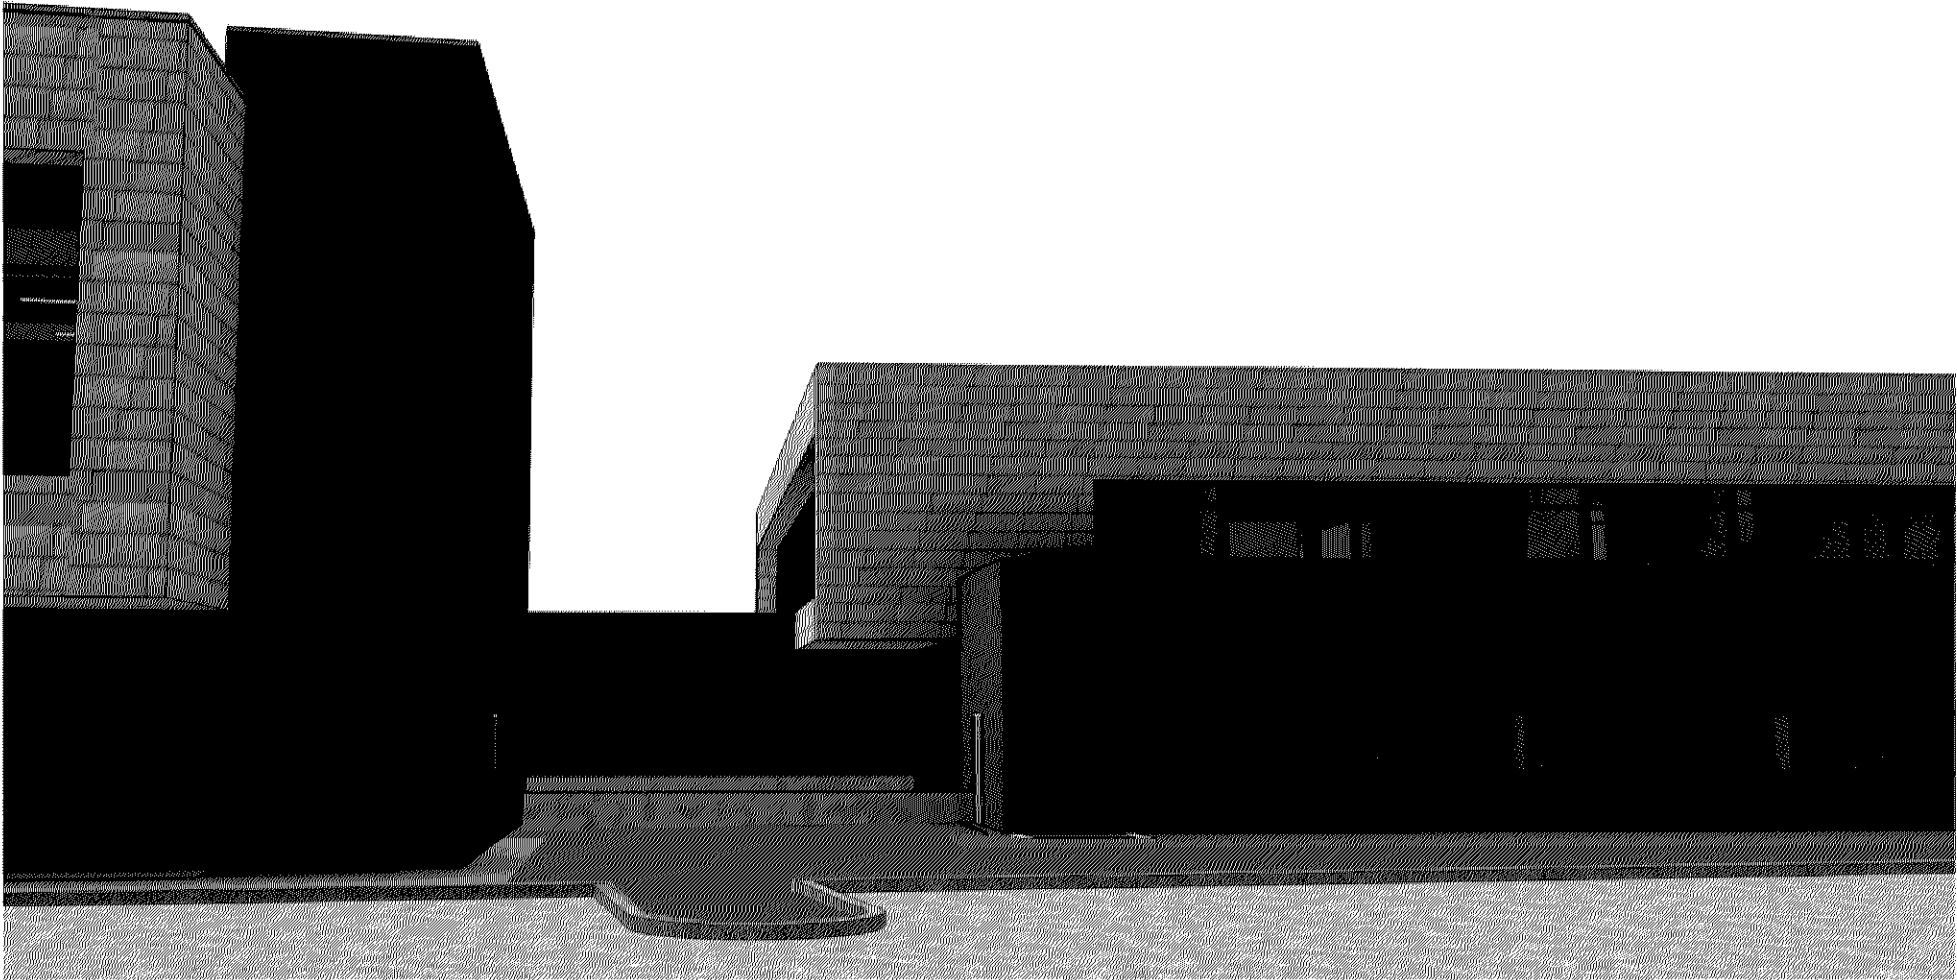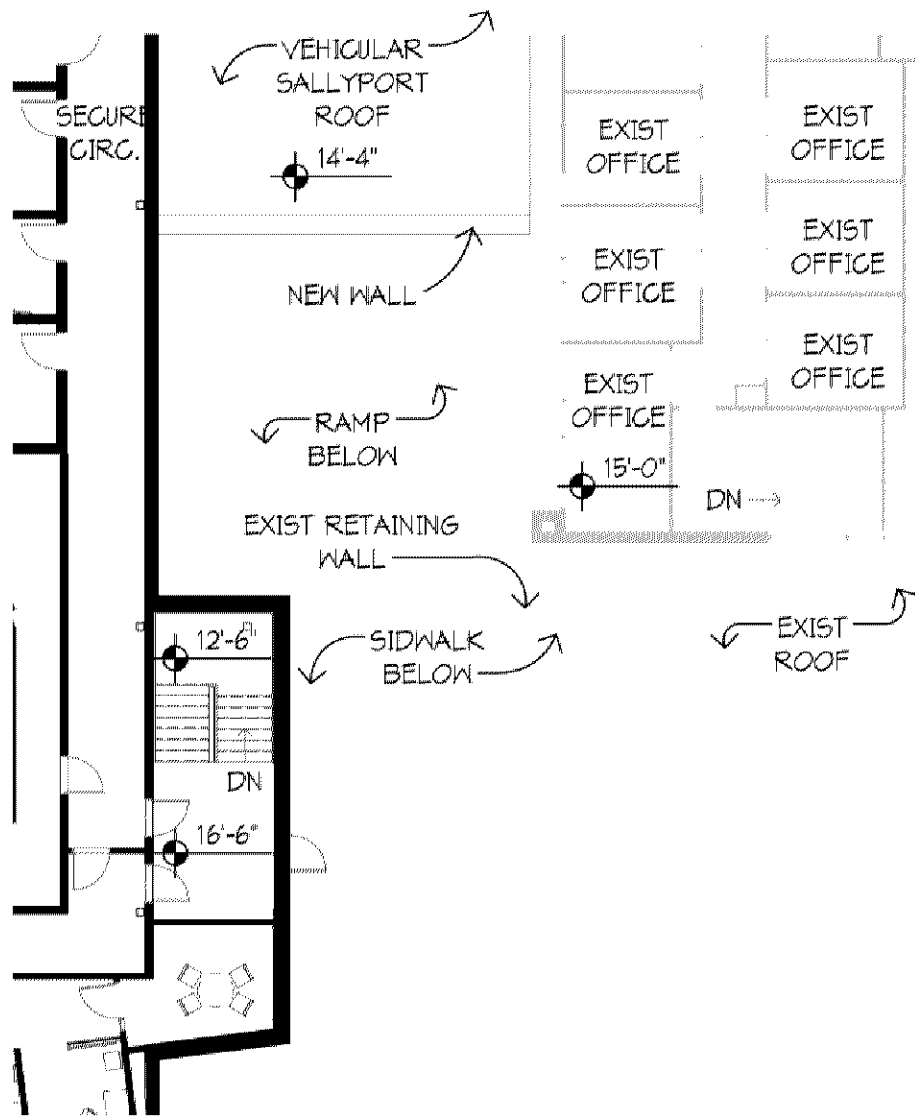


BASE BID: RAMP OPEN TO ABOVE

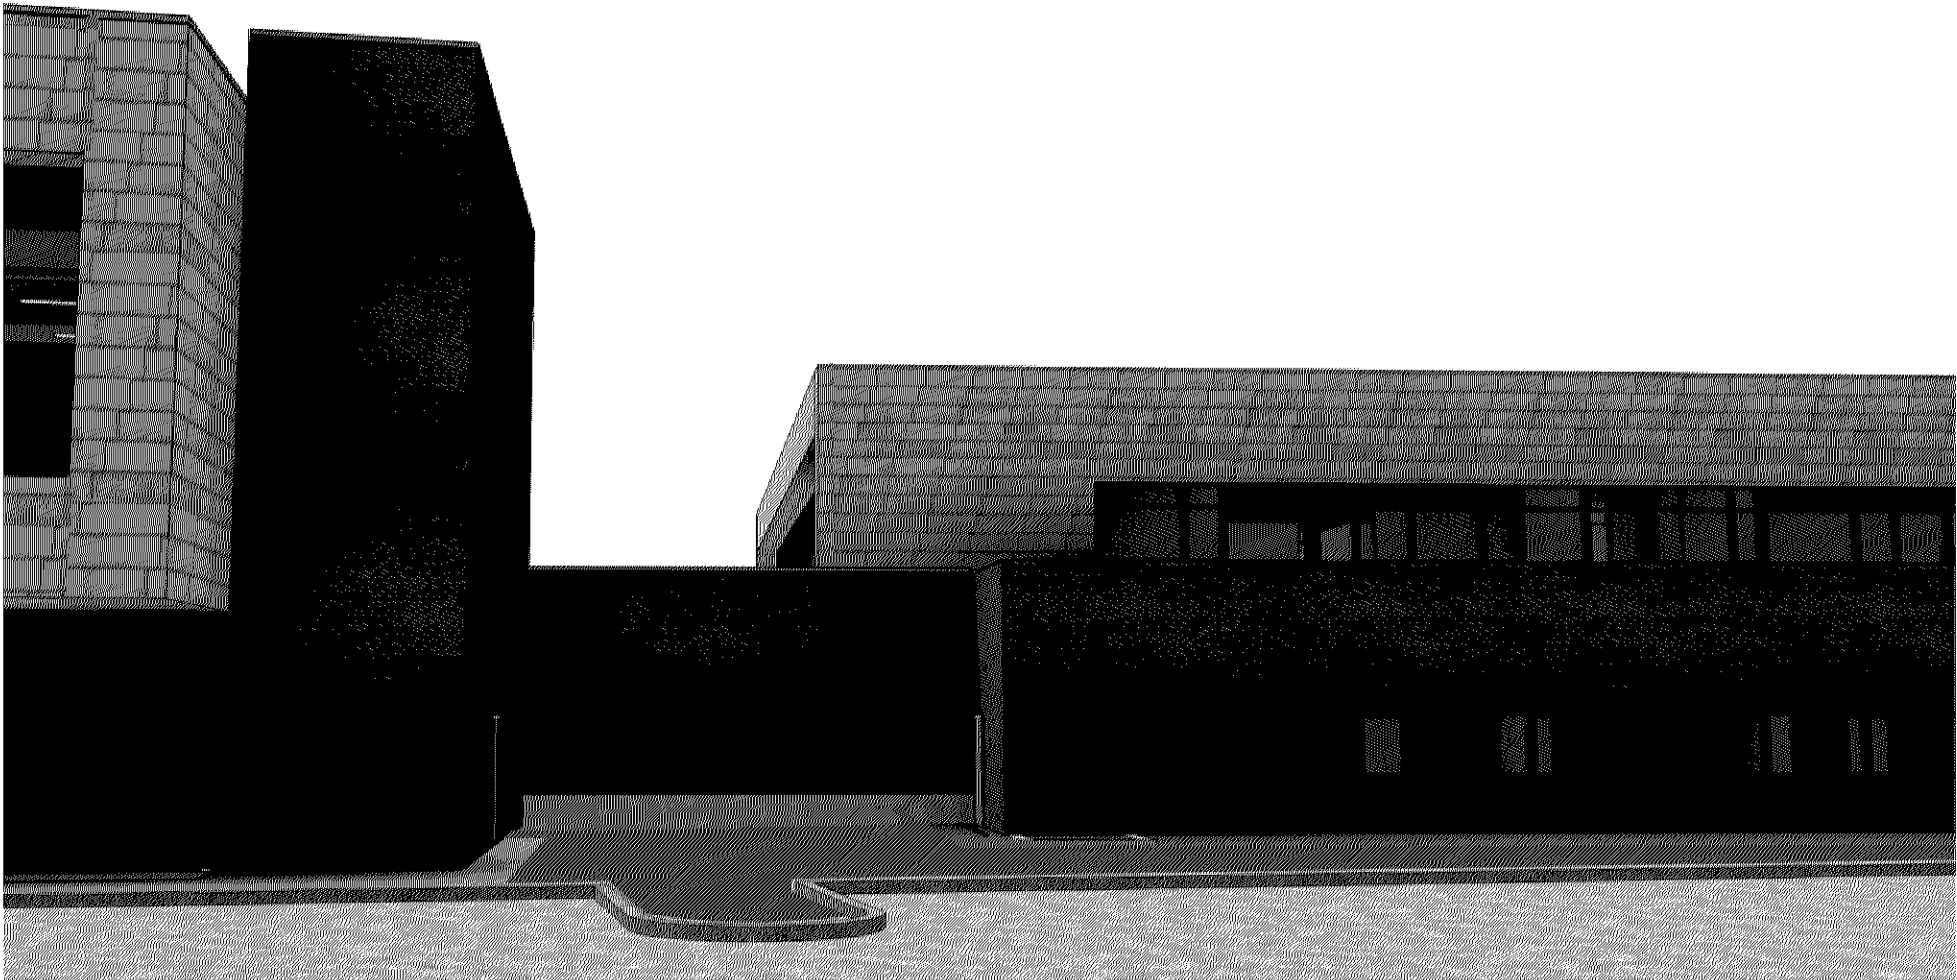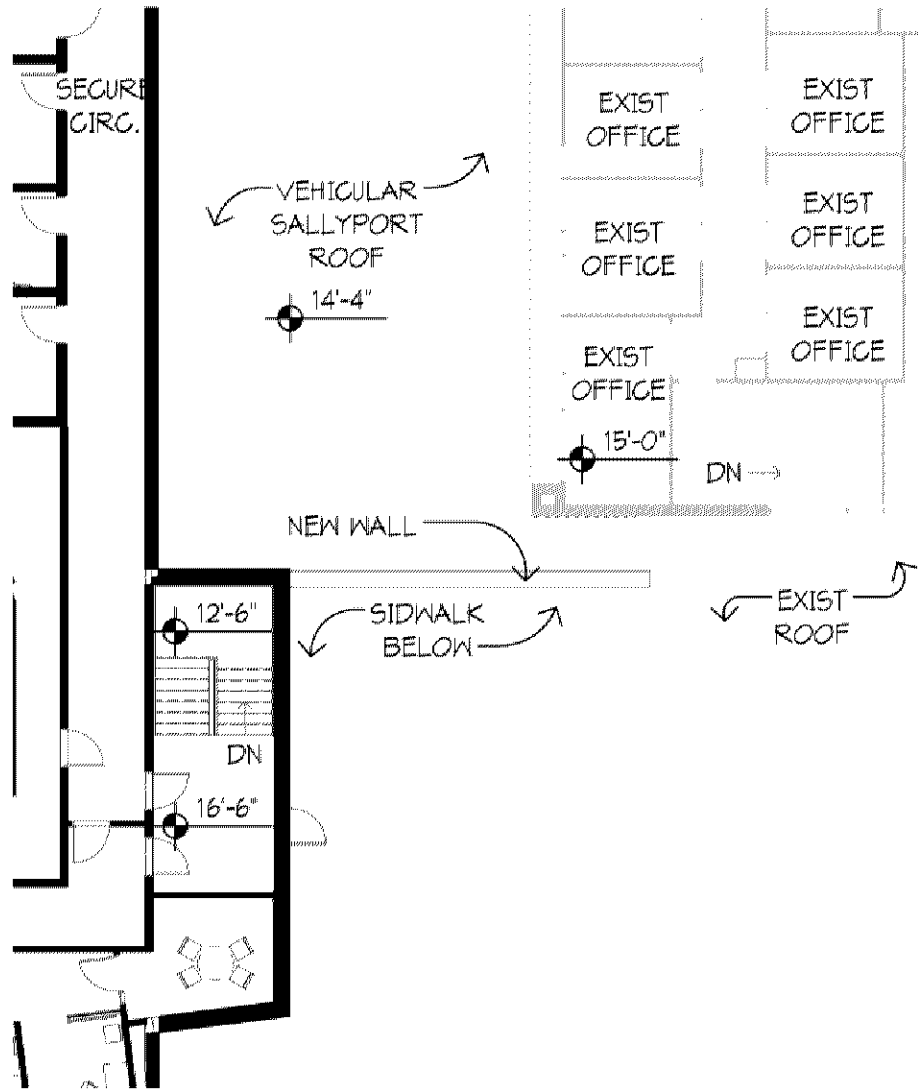

OPTION 1: ENCLOSED RAMP

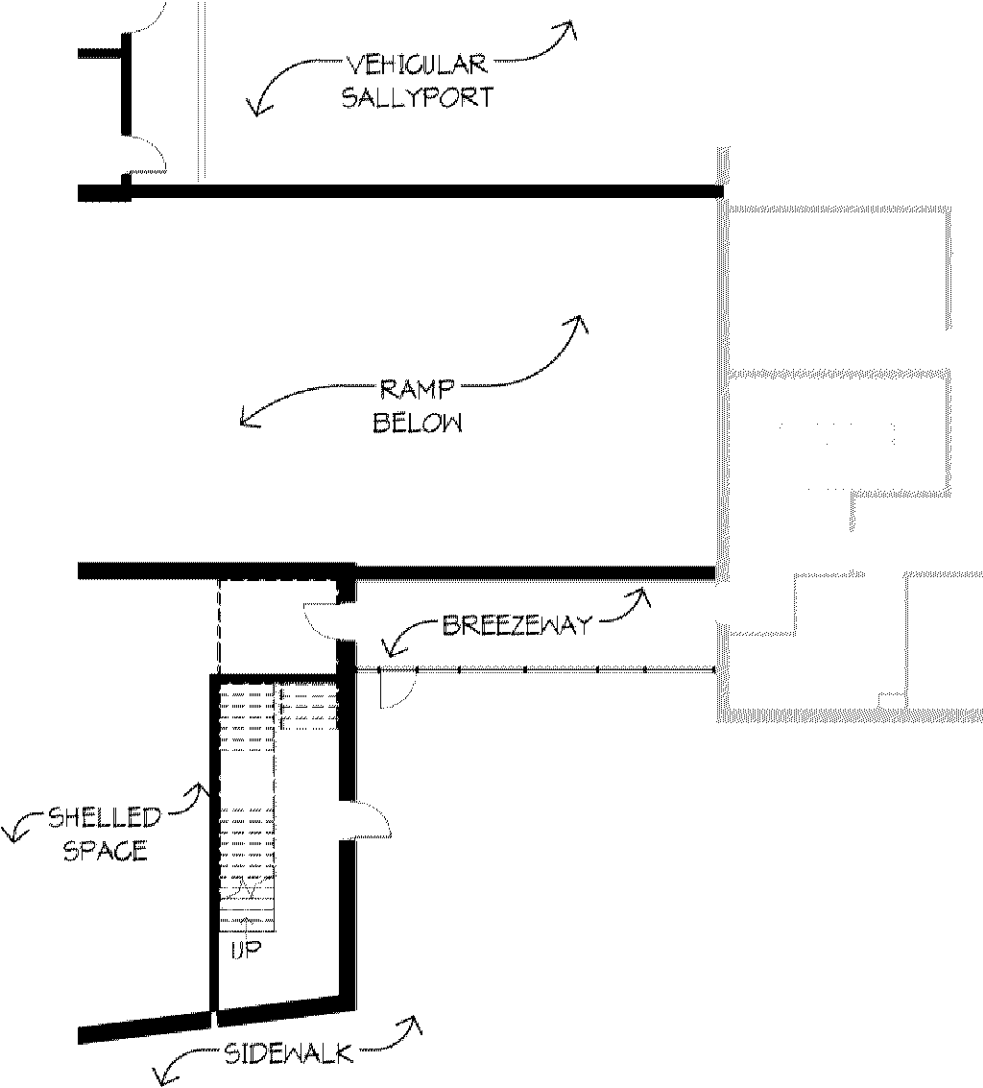

OPTION 2: BREEZEWAY CONNECTION

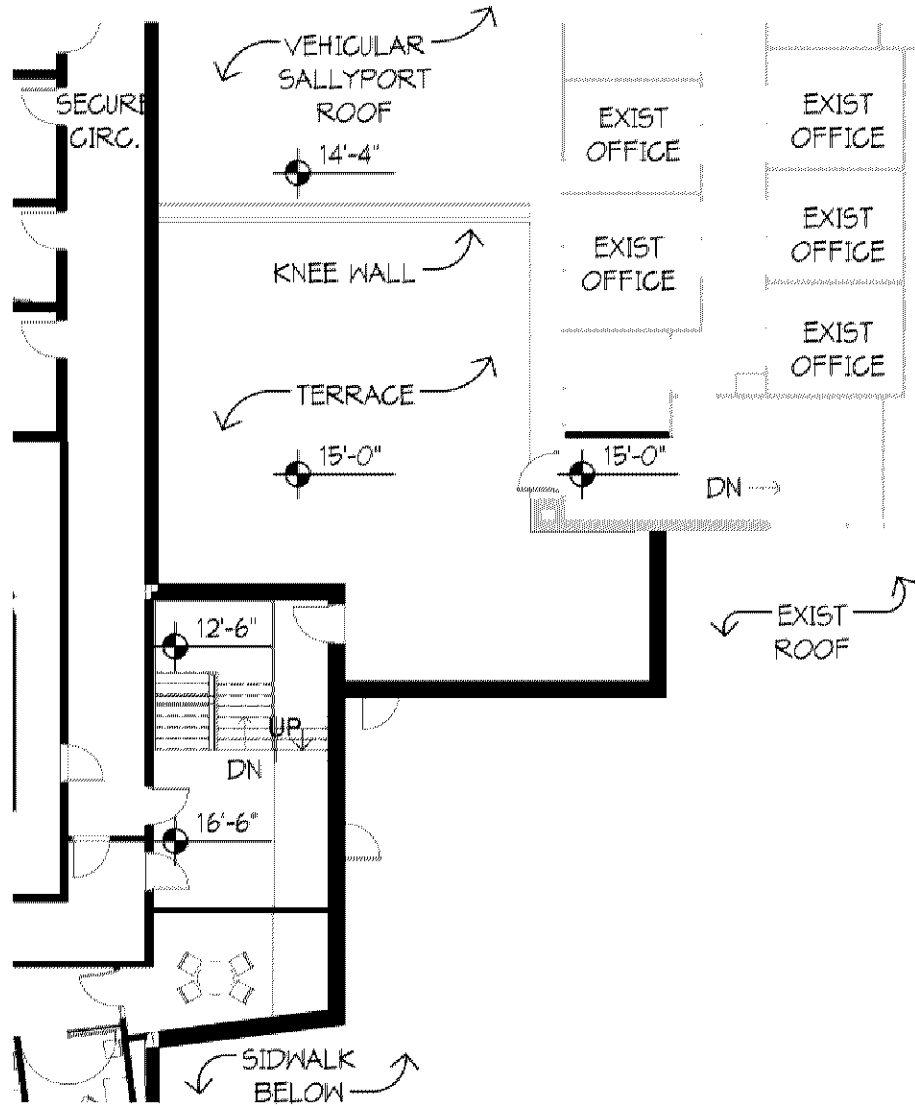

OPTION 3: OCCUPIABLE ROOF



OPTION 4: WINDOW IN SHELL SPACE